

HEADLIGHT ANTI-FLICKER HARNESSES

(2007-2018 WRANGLER JK)


INSTALLATION INSTRUCTIONS

CONTENTS

(2) Anti-Flicker Harnesses

TOOLS REQUIRED

Panel Removal Tool
T15 Torx Screwdriver

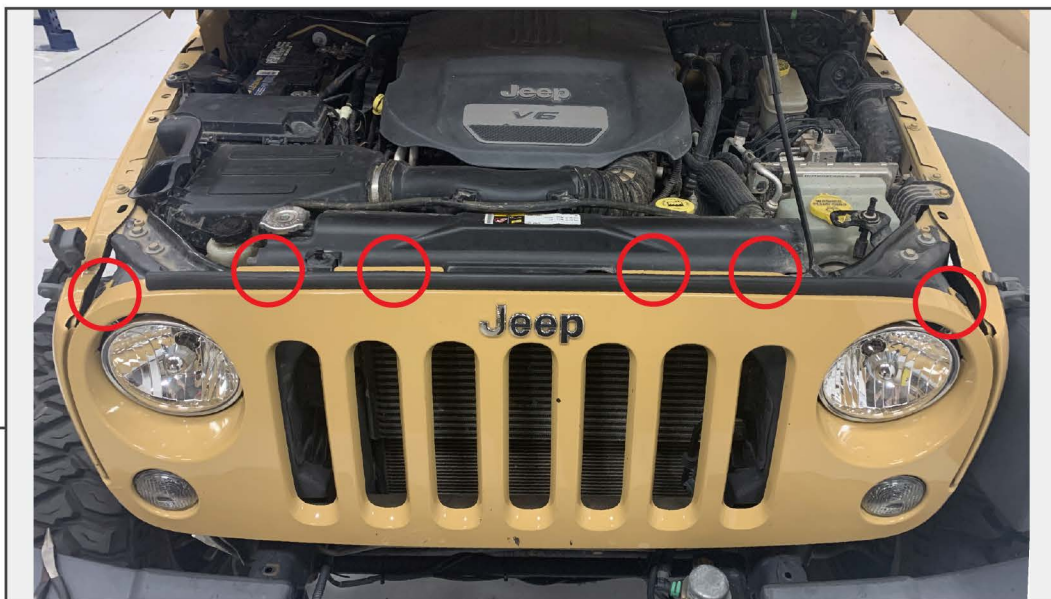

STEP 1

Remove (6) Push Clips from the top of the grille. Then pull firmly along the bottom of the grille to disengage the lower clips.



STEP 2

Unplug the turn signals by sliding back the red lock, then pushing down the black tap while sliding the plug away from the light housing. Remove the grille from the vehicle.

STEP 3



Remove the headlight from the mounting bracket by removing (4) T-15 Torx Screws surrounding the headlight lens.

STEP 4



Pull the headlight away from the vehicle to unplug the harness. Slide the red lock back, then push down the green clip to remove the harness from the light assembly.



STEP 5

Plug in the anti-flicker harness into the vehicle harness. Slide the red lock down to secure the anti-flicker harness to the vehicle. Plug the anti-flicker harness into the headlight assembly. Reassemble vehicle following steps 1-5 in reverse order.

Installation is now complete.