

LED TAIL LIGHTS

(2021-2023+ BRONCO - WITH OEM HALOGEN TAIL LIGHTS)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Tail Light
(1) RH Tail Light

TOOLS REQUIRED

8mm, 10mm Sockets
Ratchet with Extension
Phillips Screwdriver
Plastic Pry Tool
Panel Removal Tool



STEP 1

Remove (4) Phillips head plastic push clips. Loosen the Phillips head inner portion of the clip, then pull the plastic clip body out of the vehicle.

Note: Add pressure under the plastic clip body to allow the inner portion of the clip to move outwards, if necessary.



STEP 2

Remove (2) 10mm screws from the tailgate trim panel. Remove the inner trim panel from the vehicle, and set aside.



STEP 3

In between the vehicle body and the rear bumper, remove (1) 10mm bolt.



STEP 4

Using a plastic pry tool, pull the vertical section of the tail light trim outwards.

STEP 5



Pull outwards on the horizontal portion of the tail light trim, then pull upwards to remove the trim from the vehicle.

STEP 6




Remove (1) 10mm bolt from the outside of the tail light assembly.



STEP 7

Remove (2) 8mm bolts from the inside of the tail light assembly. Firmly pull the tail light assembly away from the vehicle body to dislodge the alignment pin.

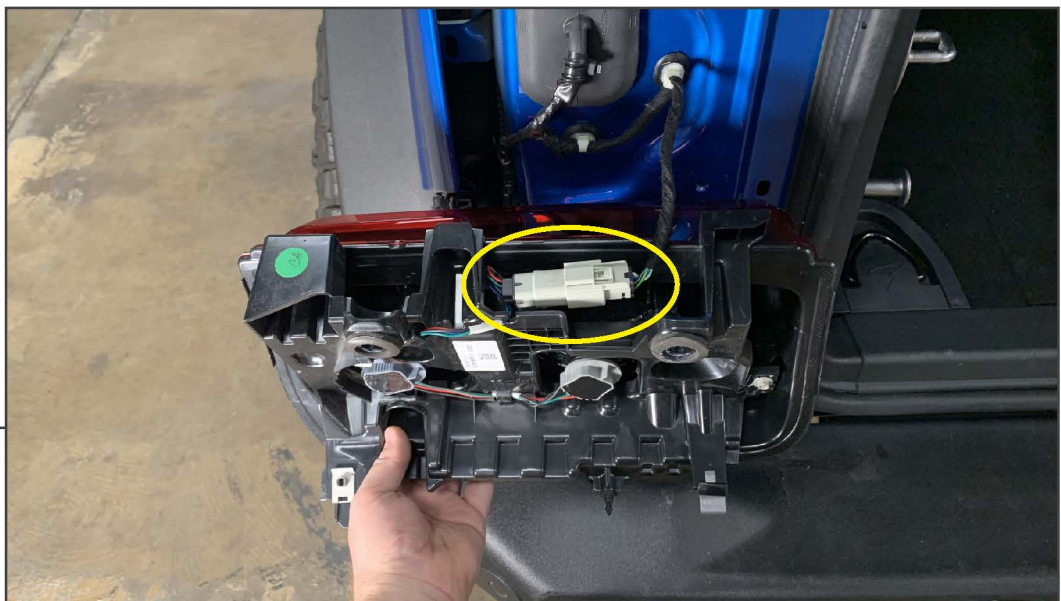

STEP 8

Unplug the tail light connector from the tail light by pressing the plastic push tap, and remove the tail light from the vehicle.

Place the original tail light on a soft surface for disassembly.



STEP 9

Plug in the new LED tail light, and secure to the vehicle using the original hardware.



STEP 10

With the tail light secure, re-install the tail light trim and the inner trim in reverse order as removal reusing the original hardware.

Repeat steps 1-10 to install the remaining tail light. Installation is now complete.