

Installation Instructions

I - Sheet Number INS-HS138 Rev.-



Hood Shield

For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-344-8759.

Important Safety Information



- CAUTION - Before driving, ensure that the hood shield is properly anchored to vehicle.
- Do not use automatic "brush-style" car washes.
- Do not use cleaning solvents of any kind.
- Periodically check all components for tightness.

Contents

NOTE: Actual product may vary from illustration. Some applications will not require the use of all mounting hardware.




Hood Shield



Bump On
x4



Washer x6




Screw
x6


Tools Required



Car Wash Supplies




Clean Towel



Phillips Screwdriver



Grease pencil



Small Pry bar

Preparation Before Painting / Installation


- A trial fit is recommended to ensure proper positioning and fit.
- Check fit of parts before painting as we will not accept the return of modified or painted parts.
- Wash your vehicle's hood to remove any debris and/or dirt.
- Dry the hood with a clean towel.
- Do NOT install hood shield if vehicle does NOT have a factory installed hood seal / gasket.

Installation Steps

NOTE: Actual application may vary slightly from illustrations.

Open hood. Note the location of rubber seal on leading edge of hood.


Rubber seal

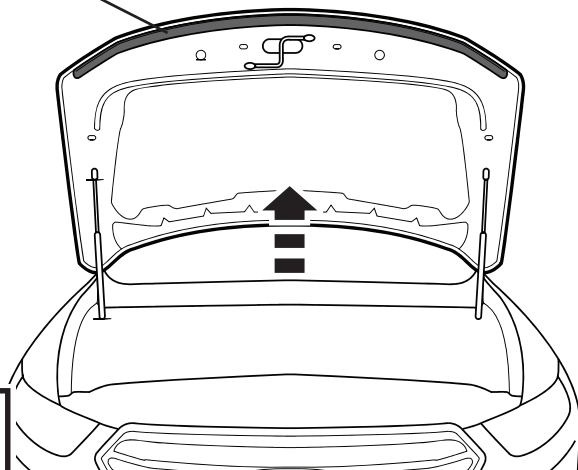

1



Center hood shield in place on hood. Use a grease pencil to mark the locations on rubber seal that correspond to holes on hood shield flange.

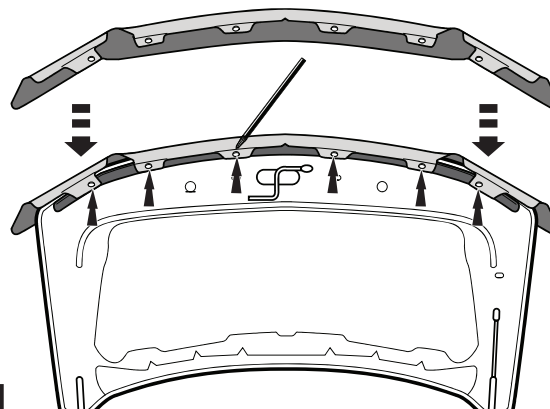

2

NOTE: Typical applications may have 4 or 6 mounting tabs.

Installation Steps


NOTE: Actual application may vary slightly from illustrations.



Remove hood shield from hood. Use a small pry bar to remove the factory installed fasteners attaching the rubber seal to the hood at the locations marked in **Step 2**.

3


Location marked in Step 2

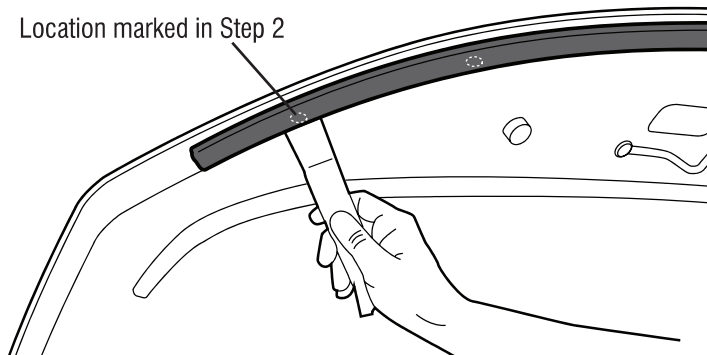

NOTE: Exercise extreme caution not to tear or damage the rubber seal when separating from hood.


Remove and discard the factory installed fastener.

Fastener

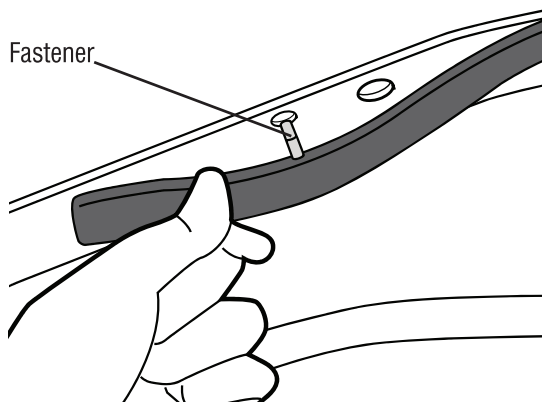

4

Reposition the hood shield on the hood with the flanges sliding **between** the hood and the rubber seal. Align holes in hood shield flange with holes in hood.


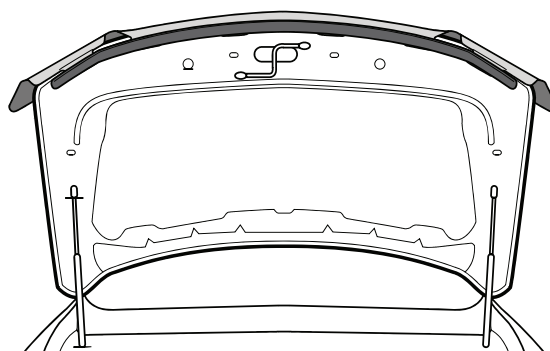


5

Gently pull the rubber seal back, and install (1) screw with (1) washer through hood shield flange and into hood. Repeat for remaining locations.




6

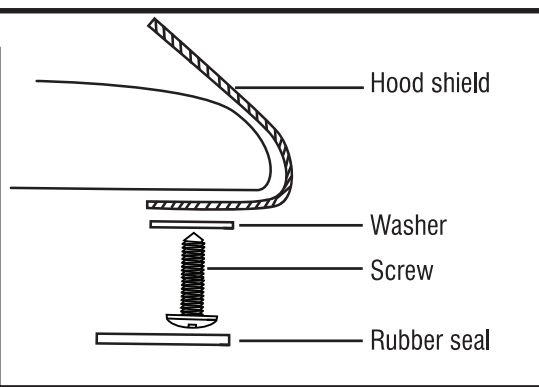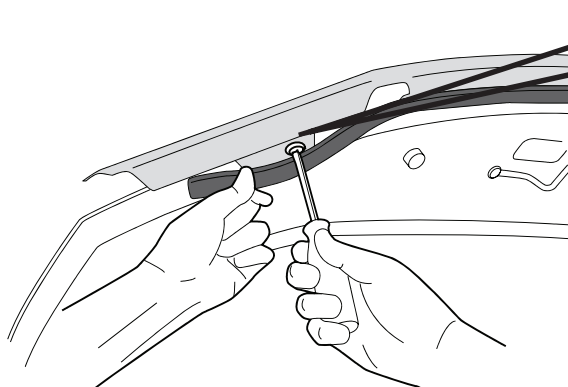

Tighten all screws until snug to secure hood shield to hood.


NOTE: DO NOT OVER TIGHTEN

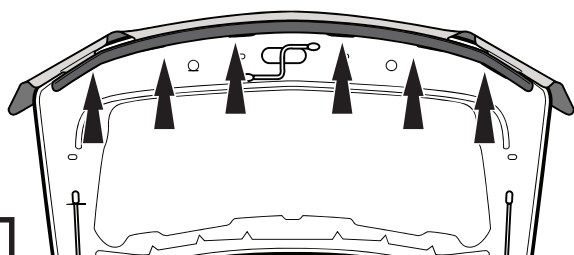

7

NOTE: Typical applications may have 4 or 6 mounting tabs.

Turn both of the hood bumpers counter clock-wise 1 1/2 turns.

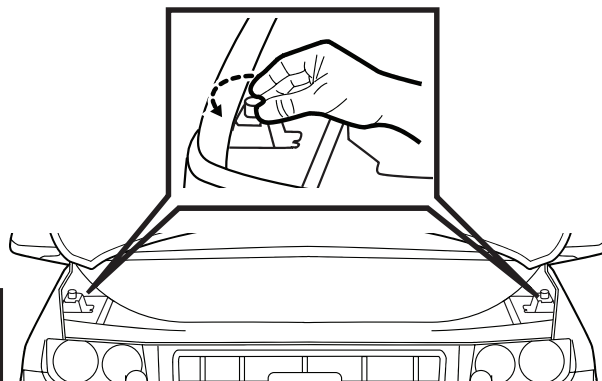


8

Installation Steps

NOTE: Actual application may vary slightly from illustrations.



Close Hood.

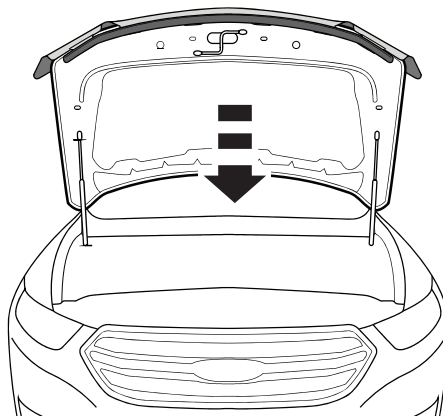

9



Apply bump-ons to surface of hood

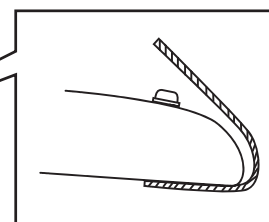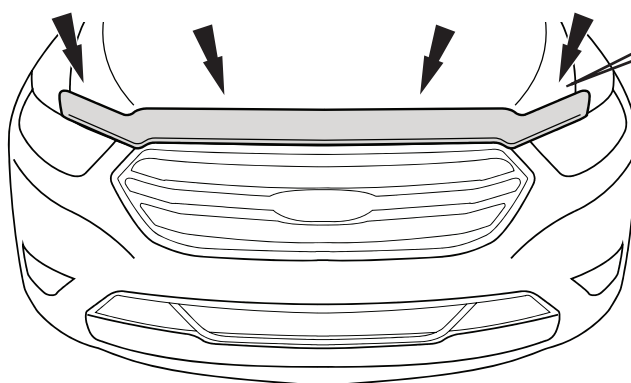


X4

10



NOTE: For Ford Bronco apply bump on to Hood Shield (instead of hood), above the Tie-Down.

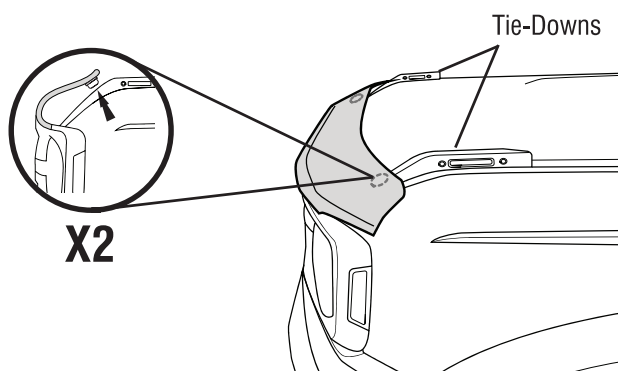

X2

11

Care and Cleaning

- Wash only with mild soap & dry with a clean cloth.



The material that your product is made from can be recycled. Please also consider recycling the packaging that your product came in.



Congratulations!

You have purchased one of the many quality Husky® branded products. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



1-800-344-8759 • Visit us at [huskyliners.com](https://www.huskyliners.com)

© 2024 Husky Liners, Inc. All rights reserved.

Husky® and the Husky logo are trademarks of Husky Liners, Inc.