

JL/JLU/JT FullShade Instructions


Start by draping the GearShade over the center roll bar of the Jeep, with the pocket zipper facing down.

In one of the front corners, take the pre-attached bungee cord and attach it to the Jeep as shown in the photo on the photo on the left.

1. Bungee goes **over** the roll bar to the outside of the Jeep
2. Wrap it **under** the roll bar, **back** to the corner grommet hole
3. Pass the clip **up** through the grommet hole
4. Attach the clip to the hole shown in the windshield frame.

Repeat for the opposite corner.



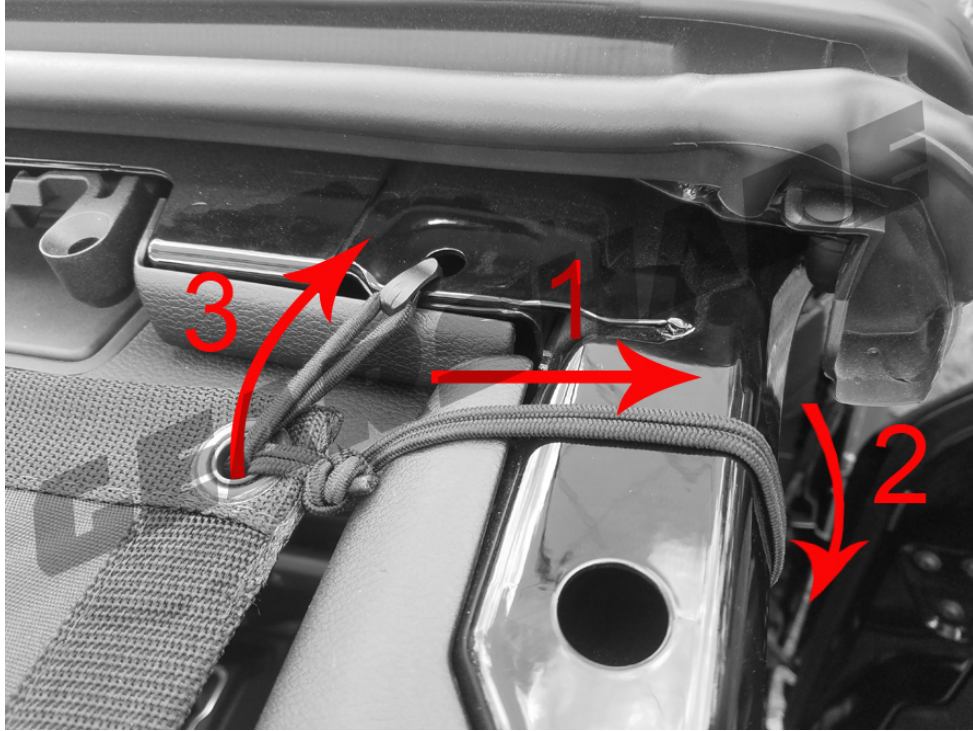


Starting from the front work to the back.

Take a loop/clip bungee cord, and loop it around the roll bar and back through itself as shown.

Then connect the plastic clip to the top of the grommet hole as shown.

Only loop/clip bungees for the front section of the FullShade

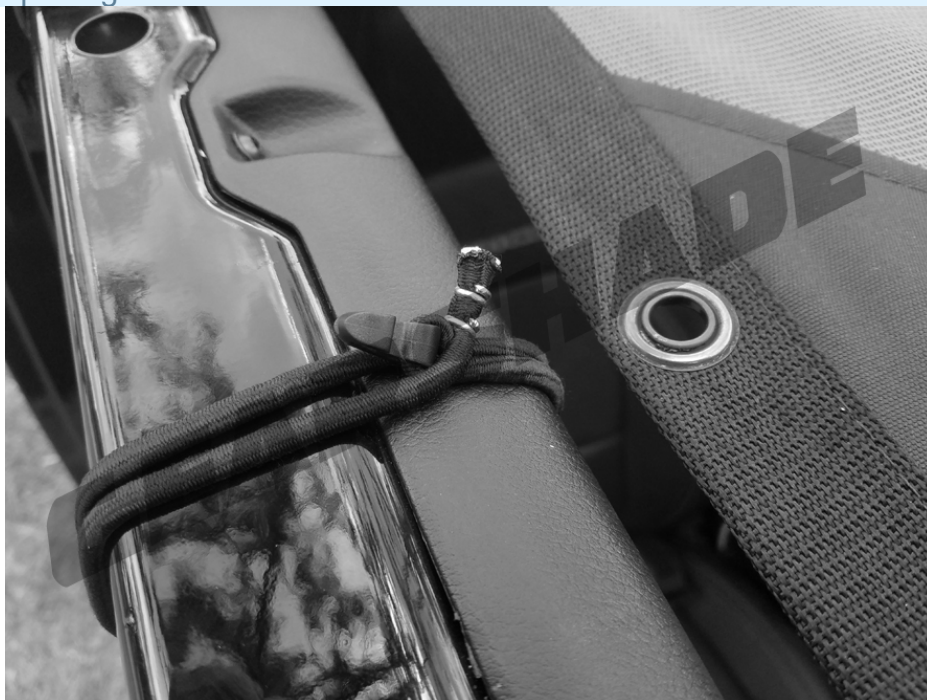



From the sound bar backwards use bungee ball cords on the remaining grommet holes.

