



GRILLE INSERT

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Grille Insert

TOOLS REQUIRED


Panel Removal Tool
Flathead Screwdriver

SKU # J132140



STEP 1

Open the vehicle hood. Remove (6) plastic push clips from the top of the grille assembly.

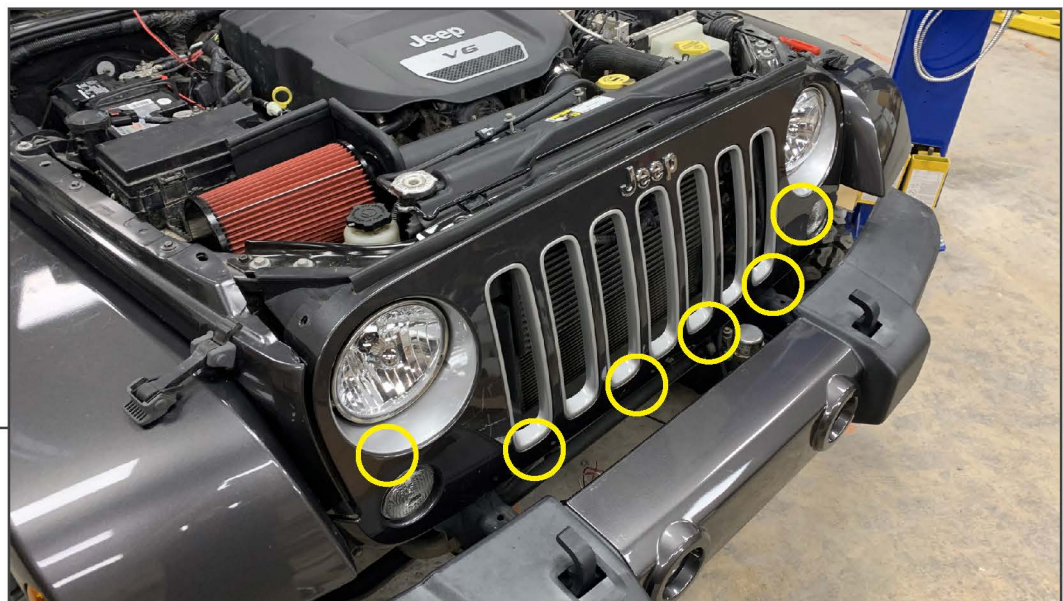

STEP 2

Firmly pull the grille away from the vehicle to dislodge the (6) metal retaining clips.

NOTE: The turn signals are still connected, only pull away enough to dislodge the clips.



STEP 3

With the grille pulled away, fit the grille insert behind the grille. Ensure the notch cutout fits to the bottom RH side of the grille.

With the grille insert in place, secure the grille to the vehicle following steps 1-2 in reverse order reusing all OEM hardware.

Installation is now complete.