

LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Set of LED Tail Lights
- (2) Resistor Brackets
- (4) Machine Bolts
- (4) Machine Nuts
- (4) Vampire Clips

TOOLS REQUIRED

- Phillips Screwdriver
- Pliers



STEP 1


Locate the vehicle tail light. Remove the inner (2) Phillips head screws securing the tail light to the vehicle. With the screws removed, pull the tail light housing towards the rear of the vehicle to dislodge from the vehicle.

Note: The OEM Phillips screws will be reused.



STEP 2

Unplug the wiring harness from the tail light, and set the OEM tail light aside.

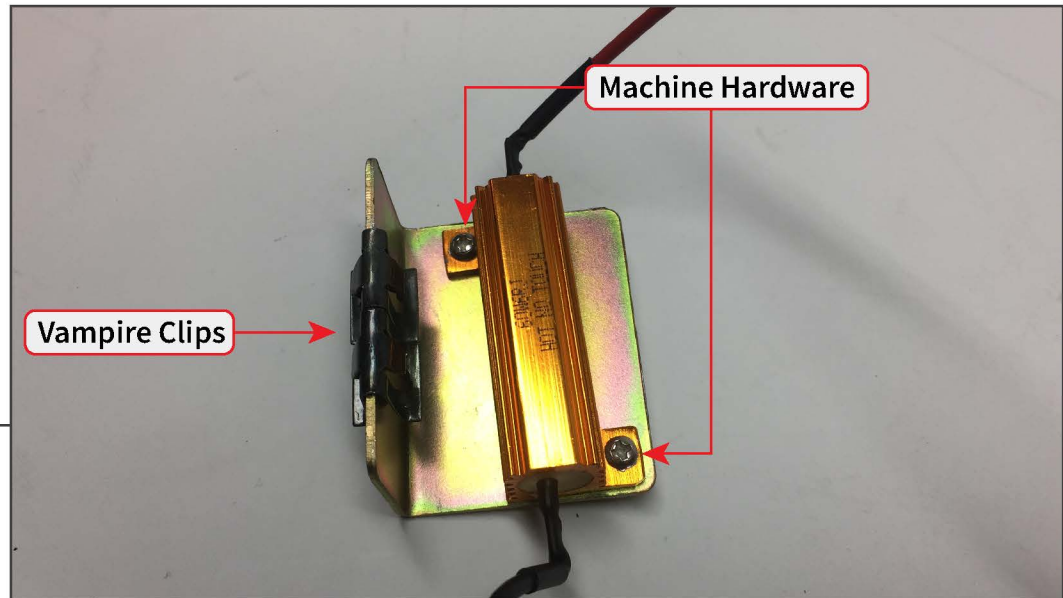

STEP 3

Secure the tail light resistor to the included bracket using (2) machine bolts and (2) machine nuts, tighten until secure.

Fit (2) vampire clips to the side of the resistor bracket. The clips will secure the resistor and bracket to the vehicle sheet metal behind the tail light.



STEP 4

Secure the resistor bracket to the vehicle sheet metal using the vampire clips. Then, plug the tail light into the vehicle wiring harness. Fit the tail light into the vehicle, and secure into place using the original (2) Phillips screws. Tighten the screws evenly until secure.

Repeat steps 1-4 for the remaining tail light.

Installation is now complete.