



---

# NEOPRENE SEAT COVERS

(Wrangler)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) LH Seat Set
- (1) RH Seat Set
- (1) Rear Seat Set

### TOOLS REQUIRED

---

Vacuum (optional)

**STEP 1 (Front)**



Begin the installation by thoroughly vacuuming all the seats. Then remove the headrests by depressing the plastic retainers on the base of each headrest post. Pull the headrest out of the seat.

**STEP 2**




Install the headrest cover over the factory headrest. The tag on the cover will face the rear of the vehicle. Velcro the center together and then tuck the sides of the headrest cover under the center.

**STEP 3**



Locate the zipper on the back of the upper seat cover, this is the console side of the cover. Unzip the zipper to make the installation easier.

**STEP 4**

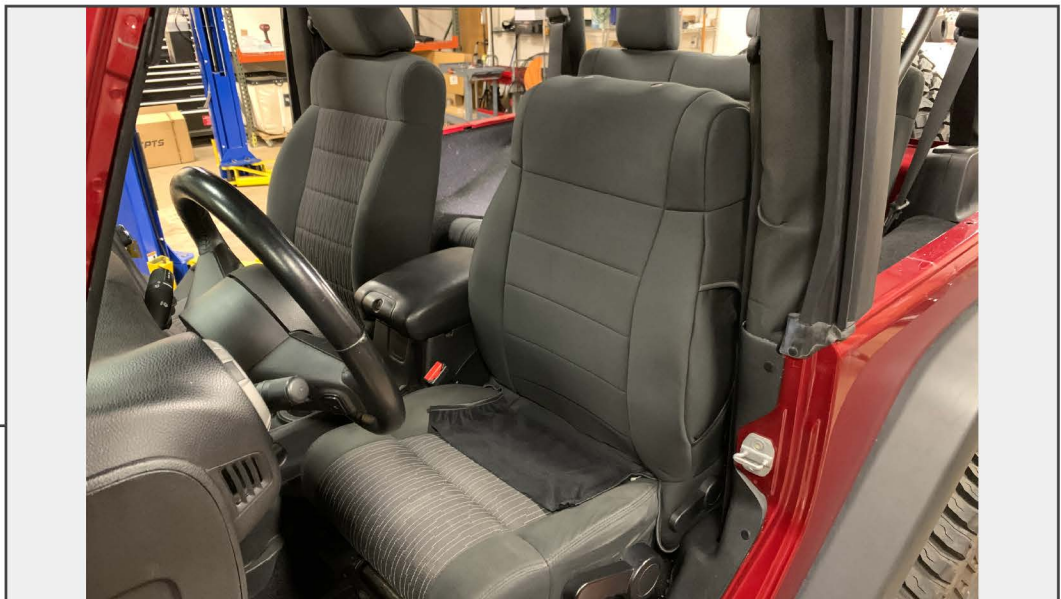

Slide the cover over the top of the seat back. Pull the cover over the seat until the top of the cover rests on the top of the seat back.



**STEP 5**



Wrap the upper cover around the seat lever and Velcro it to itself. Wrap the soft portion of the upper seat cover through the seat back. Folding the seat forward allows for more space between the seat back and seat bottom.

**STEP 6**




Continue to pull the soft portion of the cover from step 5 around the seat back. Attach the soft portion of the seat cover to the Velcro on the underside of the seat cover. Finish the upper seat cover installation by pulling down the zipper to secure the cover in place.



---

**STEP 7**

Identify the driver side lower seat cover by locating the hole for the seat height adjuster.

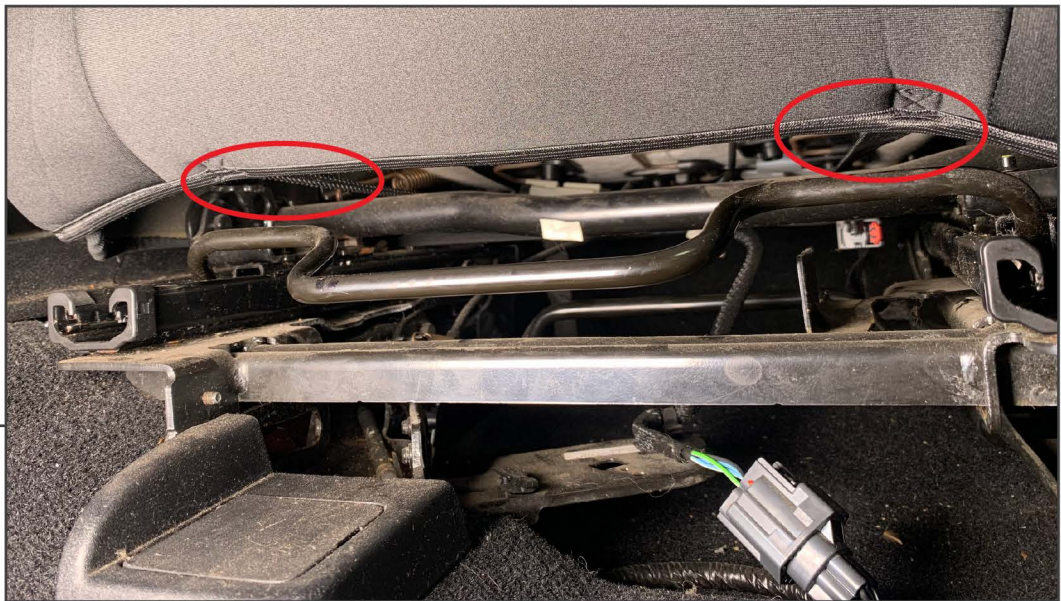

---

**STEP 8**


Unclip the straps on the seat cover that run from the front to the back. Place the seat cover over the seat bottom. Route the straps under the seat so that they do not interfere with any of the seat cables or wiring.





**STEP 9**

Route the side straps under the seat by feeding them through the gap below the seat bracket and above the slider. Location will vary from side to side, its not extremely critical but you just don't want the slider cutting the strap.

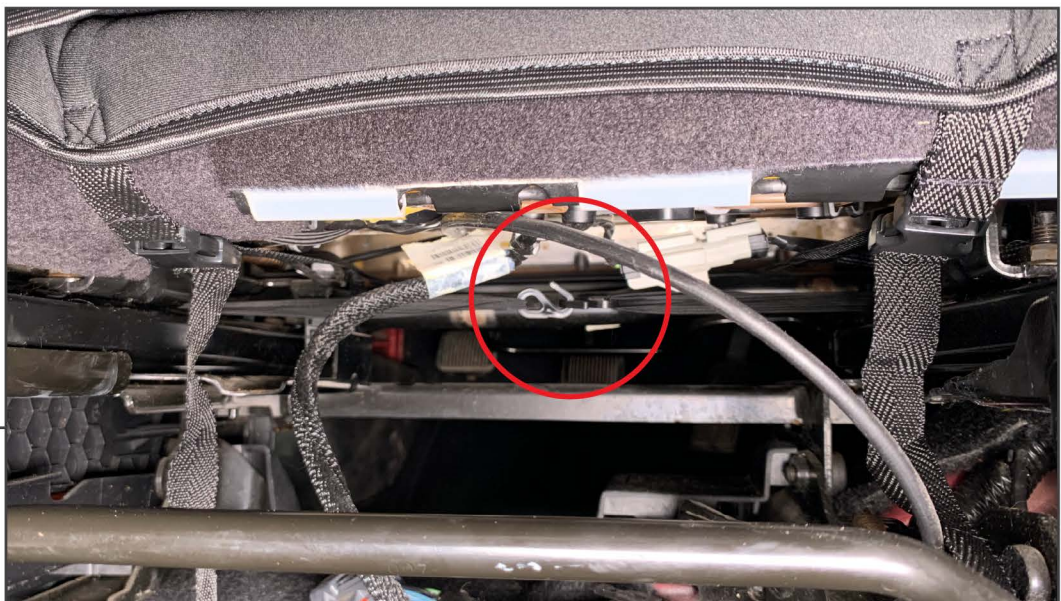

**STEP 10**


From under the seat, hook both side straps together.



---

**STEP 11**

Reinstall the headrest and follow the same procedure for the passenger seat.

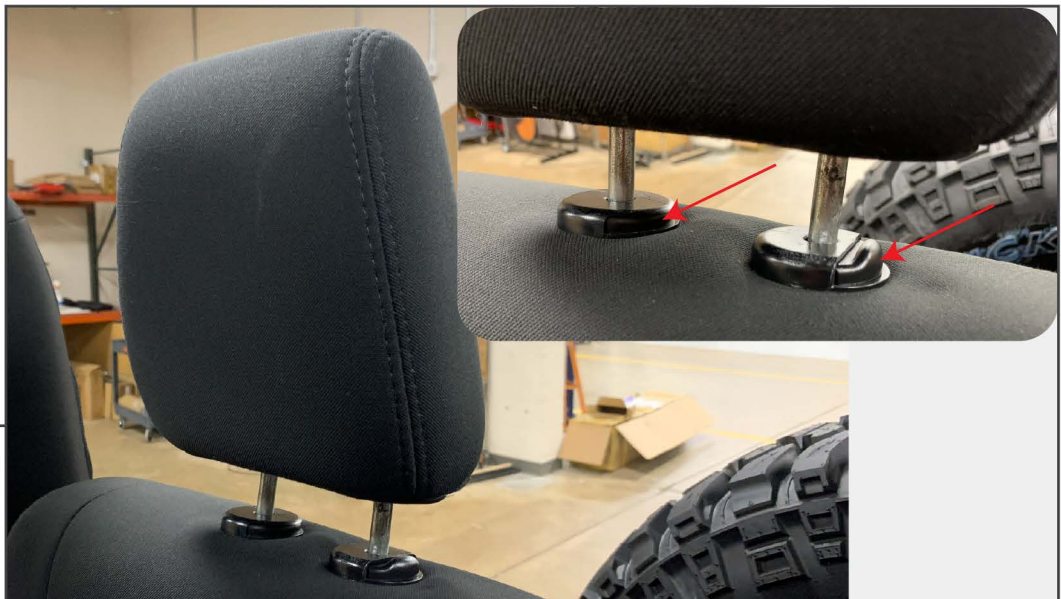

---

**STEP 12 (Rear)**

Begin the rear seat cover installation by removing the headrest by depressing the plastic retainers on the base of each headrest post. Pull the headrest out of the seat.





---


**STEP 13**



Install the headrest cover over the factory headrest. The tag on the cover will face the rear of the vehicle. Velcro the center together and then tuck the sides of the headrest cover under the center.

---

**STEP 14**

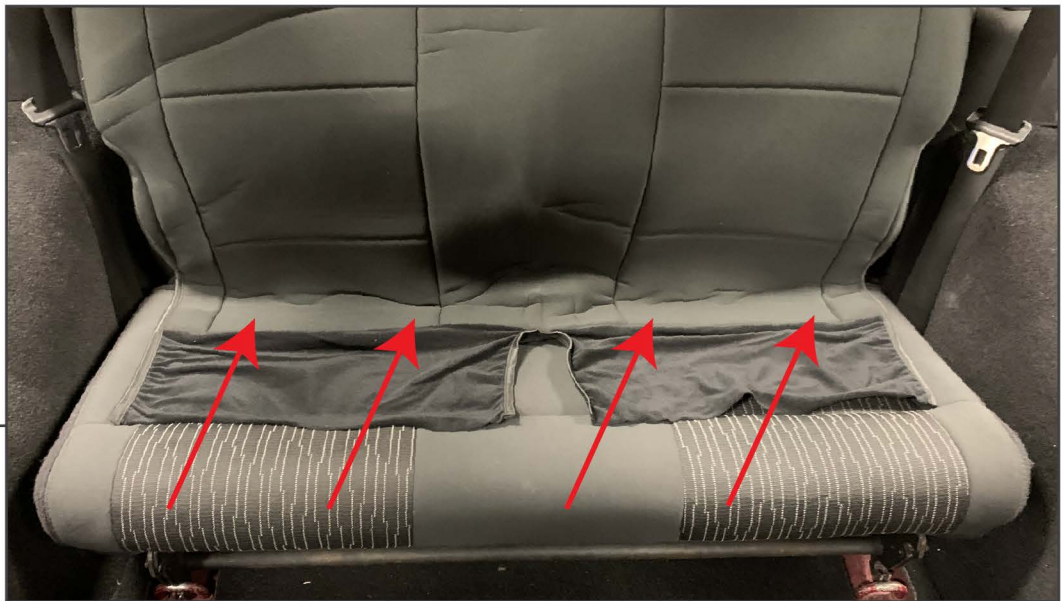

Wrap the soft portion of the upper seat cover through the seat. Folding the seat forward allows for more space between the seat back and seat bottom.



**STEP 15**




Continue to pull the soft portion of the cover from step 14 around the seat back. Attach the soft portion of the seat cover to the Velcro on the underside of the seat cover.

**STEP 16**



Pull the seat back pull handle through the seat cover opening.

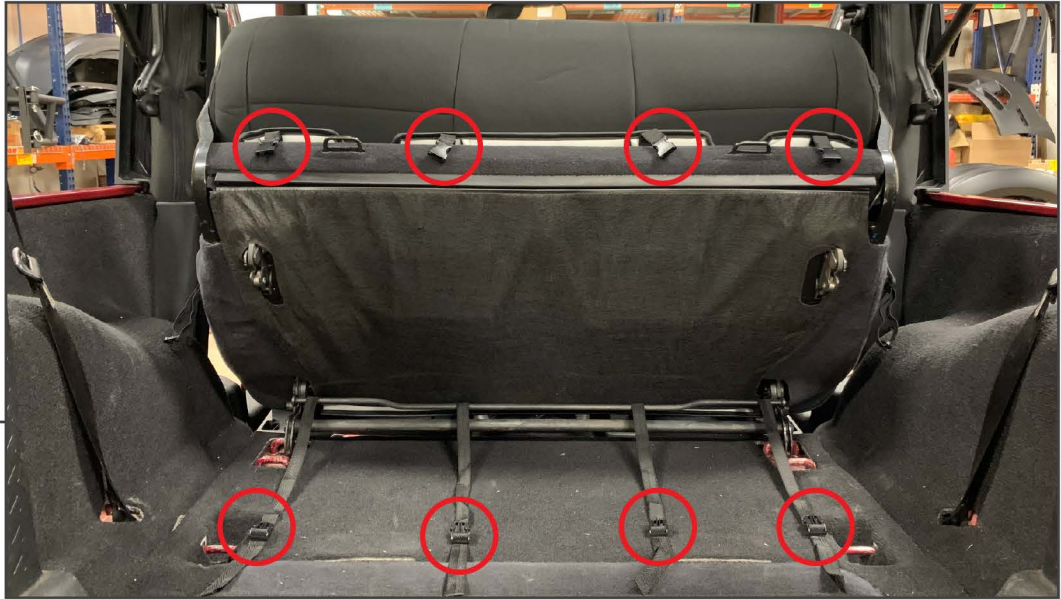

**STEP 17**

Position the lower portion of the seat cover over the seat bottom. Feed the straps towards the rear of the seat. Ensure the clips are pushed through the back of the seat.



**STEP 18**

Latch all of the straps and clip the side straps to the middle straps as shown.



**STEP 19**



Reinstall the headrest and pull the seat belt receivers through the cover to complete the installation.

## **CARE INSTRUCTIONS:**

- Clean using a damp cloth or sponge.
- Machine wash separately on gentle cycle in cold water with mild detergent.
- Air Dry Only.