

LED PROJECTOR HEADLIGHTS

(2018-2020 JEEP WRANGLER JL; 2020 GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Left Hand Tail Light
(1) Right Hand Tail Light
(1) Accent Light Harness

TOOLS REQUIRED

Soft Pry Tool
10mm Socket and Ratchet
Phillips Head Screwdriver

STEP 1



Begin by raising and supporting the hood. Remove the (6) plastic push clips that secure the grille to the vehicle. Then firmly pull the grille away from the vehicle to dislodge the (8) blind clips across the bottom of the grille and below the headlights.

STEP 2



Remove the (3) 10 mm bolts securing the headlight to the vehicle.




STEP 3

Pull the headlight away from the vehicle to access the wiring connection. Depress the tab and pull the plug away from the headlight.




STEP 4

Route the supplied accent lighting harness from the fuse box and then to each headlight opening. Connect the fuse tap to a suitable 12v ignition source. Location F52 is recommended. Secure any loose wires away from hot/moving engine components.

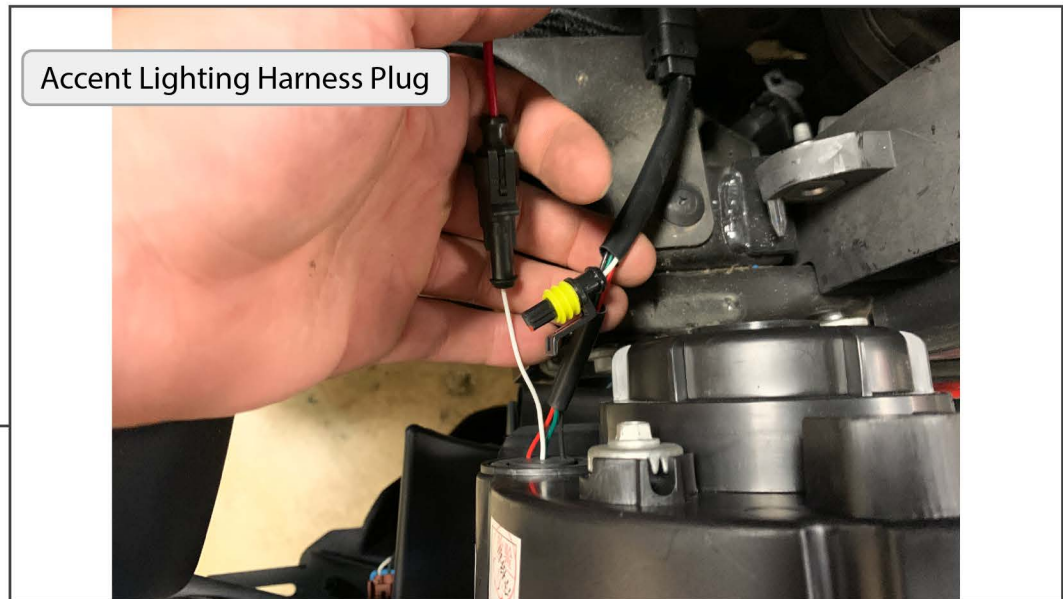

STEP 5

Unplug the white wire from the headlight harness and connect it to the accent lighting harness installed in step 4.

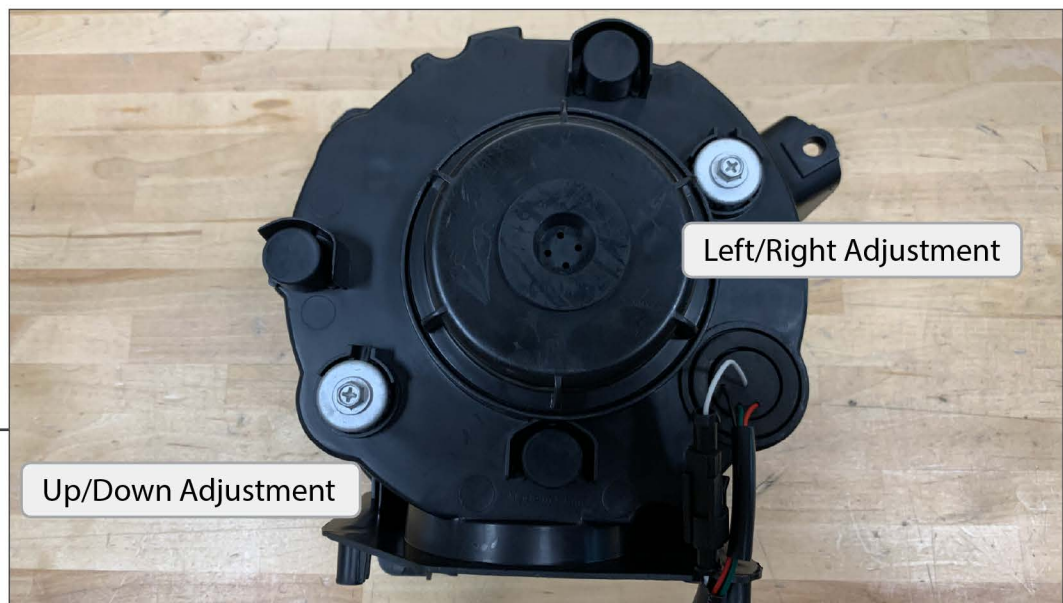

STEP 6

Re-install the headlights to the vehicle following Step 2-3 in reverse order. Align the headlights using the adjustment screw on the back of the light. Adjust the lights per manufacturers recommendation.



STEP 7

Re-install the grille using the factory hardware. Installation is now complete.