



# LED HALO HEADLIGHTS- BLACK DIAMOND

(2018+ WRANGLER JL)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (2) Headlights with Mounting Brackets
- (2) Running Light Wiring Extensions
- (2) Scotchlok Connectors

### TOOLS REQUIRED

---

- Soft Pry Tool/Panel Removal Tool
- 8mm, 10mm Sockets
- Ratchet

SKU: J133763



## STEP 1

Raise and support the hood to access the (6) push clips securing the grille to the vehicle. Remove the clips and then firmly pull the grille away from the vehicle.



## STEP 2

Using a 10mm socket, remove the (3) bolts securing the headlight to the vehicle.




## STEP 3

Pull the headlight away from the vehicle to access the wiring connection. Depress the connectors locking tab and pull the connector away from the light.



## STEP 4

Remove the (2) 8mm bolts and (1) plastic push pin to gain access to the fender mounted running light.

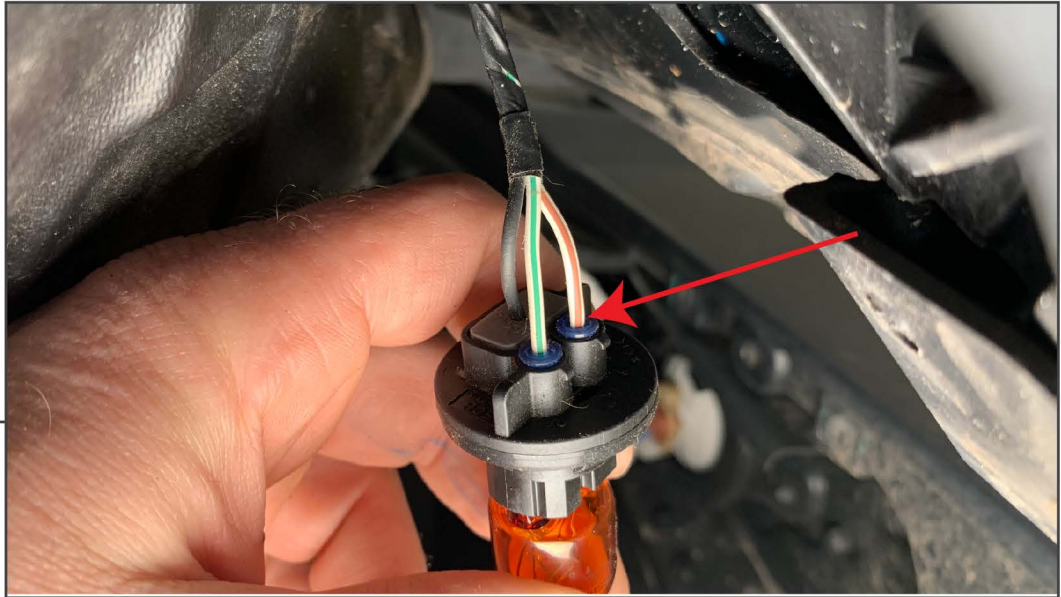

## STEP 5

Turn the running light socket counter clock-wise and remove it from the housing. Using a test light, turn on the running lights and test for 12v+ power at the plug. On this vehicle the white/brown wire is the DRL wire. Connect the provided yellow wiring harness to the white/brown wire. Run the spade end of the wire to the headlight bucket.




## STEP 6

Connect the yellow DRL wiring to the headlight.



## STEP 7

Install the LED headlight onto the vehicle using the factory hardware. Test the lights for functionality and alignment.

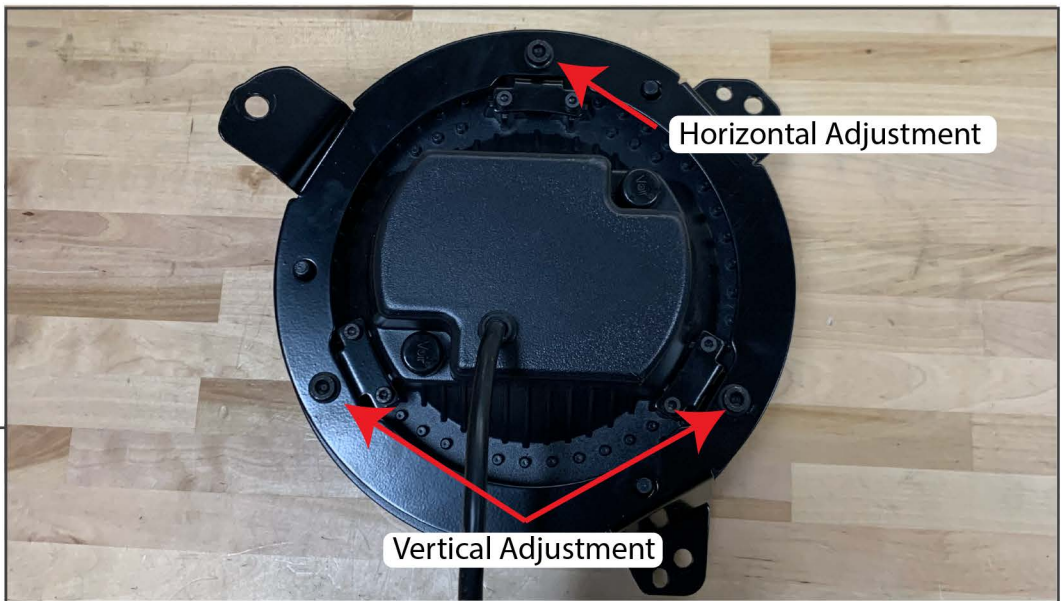

## STEP 8

Follow the manufacturer's recommendation for adjusting/aligning the headlights. Use the Allen screws on the back of the headlight bracket to adjust the light as needed. Once the lights are adjusted, follow Steps 1-4 in reverse order to complete the installation.