



FUEL DOOR

(2018+ WRANGLER JL)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Fuel Door
- (1) Rubber Grommet

TOOLS REQUIRED

- 10mm Socket and Ratchet
- Soft Pry Tool.


SKU # J133781-JL

STEP 1



Begin by opening the tailgate to access tail light trim cover. Using a soft pry tool, remove the cover.

STEP 2

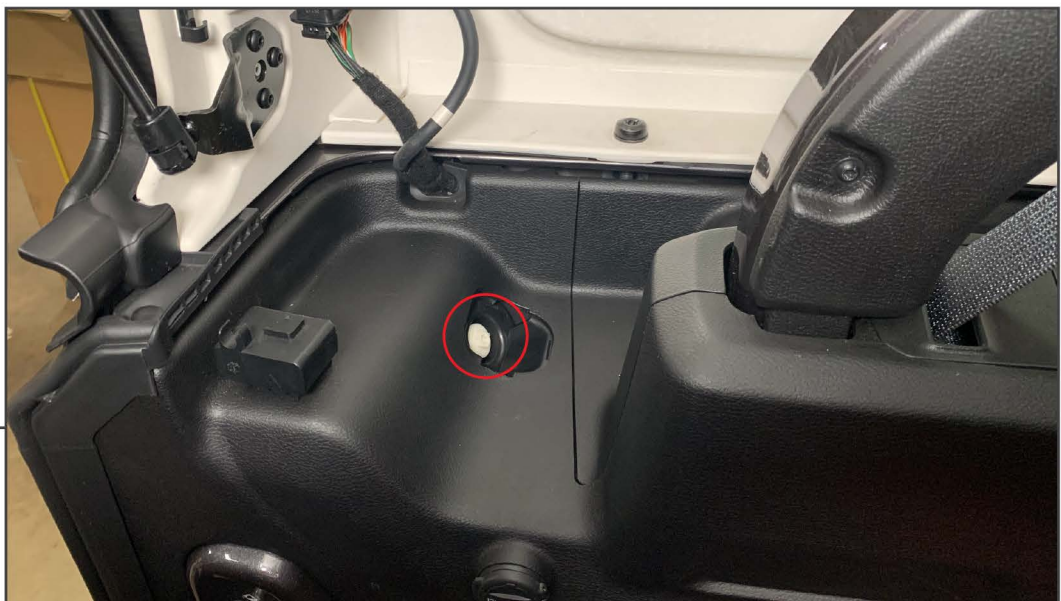


Using a 10mm socket, loosen the plastic tail light retaining screw.

STEP 3



Pull the tail light away from the vehicle to access the light's wiring connection.

STEP 4

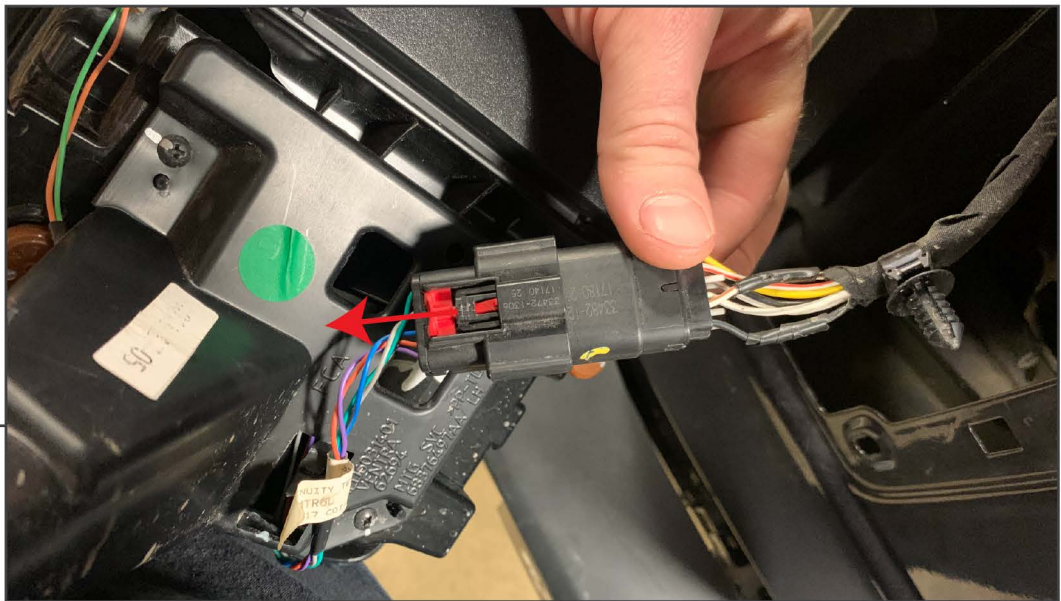

Slide back the plug's red locking tab. Then depress the connector tab and pull the plugs apart. Set the light aside.

STEP 5



Remove the fuel cap from the filler neck. Then using a soft pry tool, remove the cap's tether

STEP 6



Through the tail light opening access the back of the factory trim panel. Depress the plastic tabs around the factory trim and remove it from the vehicle.



STEP 7

Align the locating tab on the new fuel door with the vehicle. Carefully press the new fuel door over the fuel filler neck and on to the vehicle. Ensure it clips into place.



STEP 8

Complete Steps 1-5 in reverse order to complete the installation.