

7" HEADLIGHT RETRO-FIT KIT

(2018+ WRANGLER JL) (2020 GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Assembly (Mounting Ring and Brackets)
- (1) RH Assembly (Mounting Ring and Brackets)
- (10) Allen Bolts
- (2) Adapter Harnesses
- (1) Allen Key

TOOLS REQUIRED

Soft Pry Tool 10mm Socket Socket Wrench





Begin by opening and supporting the hood. Use a soft pry tool to remove the (6) plastic push pins across the top of the grille. Then Firmly pull the grille away from the vehicle. Set the grille aside for re installation later.




STEP 2

Using a 10mm socket, locate and remove the (3) 10mm bolts securing the headlight to the radiator support.





Pull the headlight away from the vehicle. Pull back the red plug locking tab, then depress the clip and pull the plug away from the light. Remove the light from the vehicle.

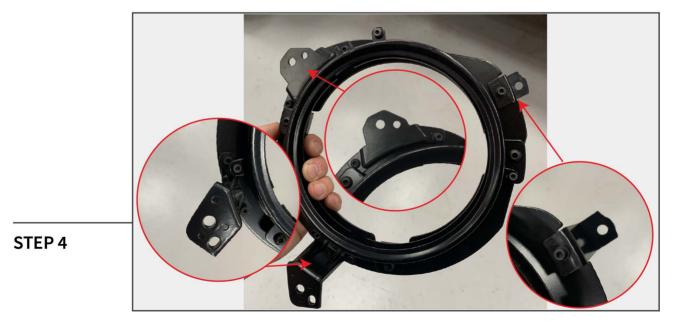

Starting on the Driver's side of the vehicle, locate all the brackets stamped "L". Using the provided Allen key and bolts assemble the LH bracket.






Install the adapter bracket to the vehicle using the factory hardware.



STEP 6

Plug the supplier headlight adapter into the factory JL headlight plug. Ensure the plugs click together.



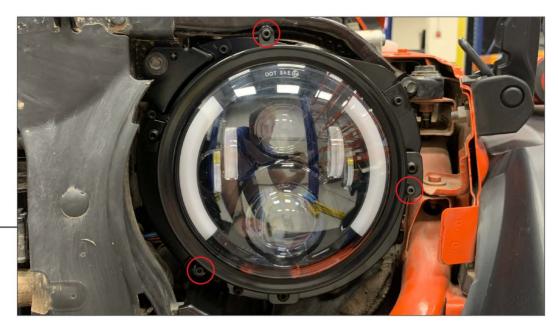

Remove the (3) Allen bolts using the supplier Allen key. Install the headlight retaining ring on any 7" headlight. Plug the light into the adapter harness and reinstall the (3) Allen Bolts. **Note: 7" Headlights are NOT included.



STEP 8

Before reinstalling the factory grille, adjust the (3) adjustment screws as needed to align the head-light to factory specifications. Then reinstall the grille. Installation is now complete.