




OMIX-ADA, Inc.


460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | Info@omix-ada.com

Elite Antenna Base

1

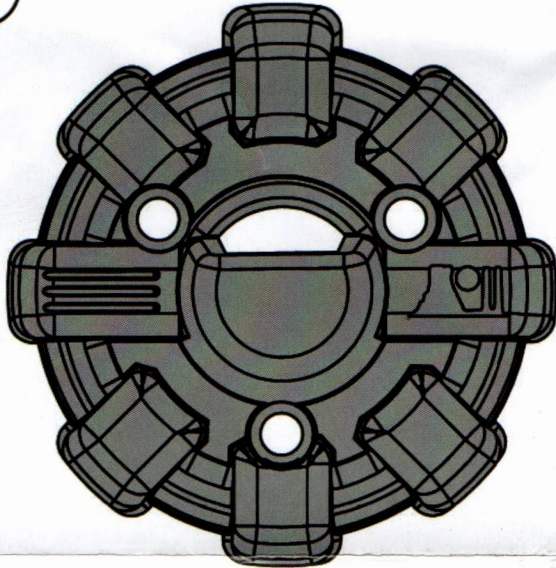

2

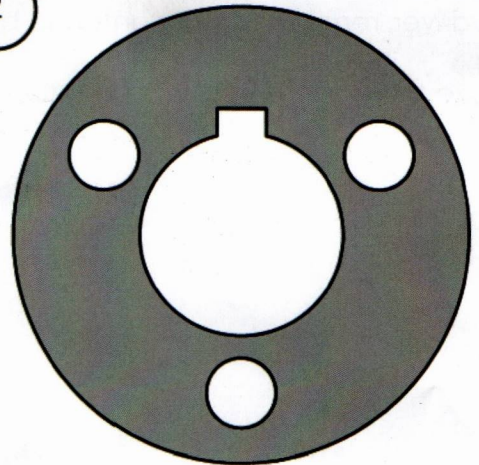

3



4



Components

- 1. Antenna Base.....(1)
- 2. M5 Bolt.....(3)
- 3. Rubber Gasket.....(1)
- 4. Antenna Adaptors.....(2)

OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8am - 5pm EST 1-800-449-6649 | EMAIL: techsupport@omix-ada.com

FOR WARRANTY INFORMATION VISIT: www.Omix-Ada.com



OMIX-ADA, Inc.




460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | Info@omix-ada.com

Elite Antenna Base

1. Unscrew antenna from base. Using a flat head screwdriver, remove factory antenna base cover.

Remove three factory screws from the antenna base.

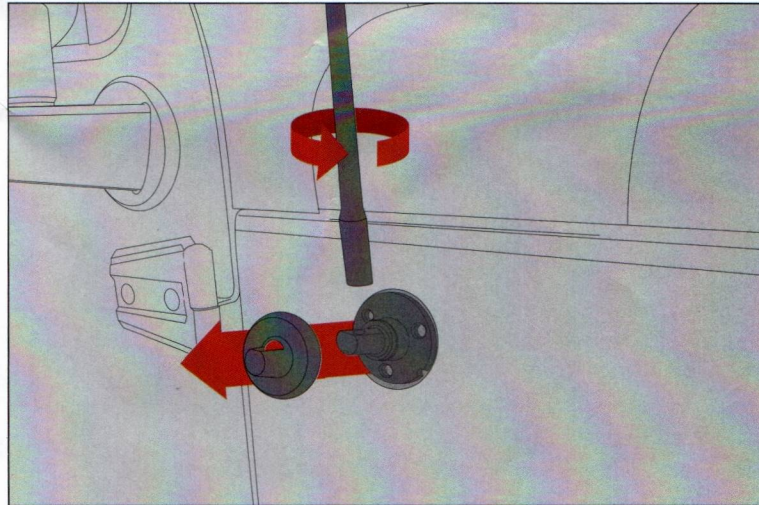

2. Insert three screws into the Elite Antenna Base. Press screws through rubber gasket to hold in place.

Secure bolts onto vehicle, ensuring opening for antenna is facing upwards.

Re-attach antenna using one of the supplied antenna adaptors.

