

DOOR ENTRY GUARDS

(1997-2006 WRANGLER TJ)

INSTALLATION INSTRUCTIONS

CONTENTS


(2) Door Entry Guards

TOOLS REQUIRED

Isopropyl Alcohol Microfiber Cloth



STEP 1

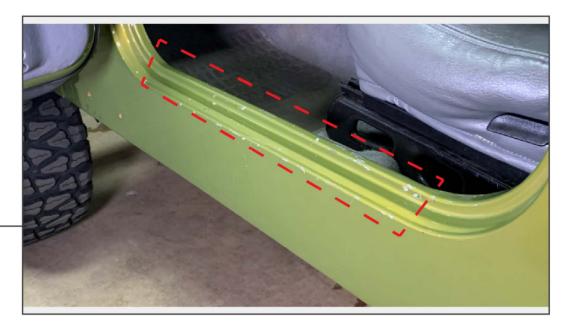

Clean the bottom of the door opening using isopropyl alcohol and a microfiber cloth.



Peel back the film on the double sided tape. Align the door entry guard to the vehicle, then firmly apply pressure to the door sill guard to adhere the guard to the vehicle. Repeat procedure to the opposite side.

Installation is now complete.