



LED HEADLIGHTS WITH RGB HALO

(1997-2018 WRANGLER TJ & JK)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Pair of LED Headlights
- (2) Anti-Flicker Harnesses
- (2) Headlight Adapters
- (1) RGB Wiring Harness

TOOLS REQUIRED

- Panel Removal Tool
- T15 Torx Screwdriver



STEP 1

Open the hood. Remove (6) plastic push clips using a panel removal tool.




STEP 2

Firmly pull the lower portion of the grille away from the vehicle to dislodge the lower clips from the grille. Unplug the turn signal harnesses from the turn signal housings.



STEP 3

Remove (4) T15 Torx screws from the headlight assembly. Unplug the connector from the light by sliding back the red slider, then pushing down the plastic tab. Remove the light from the vehicle.

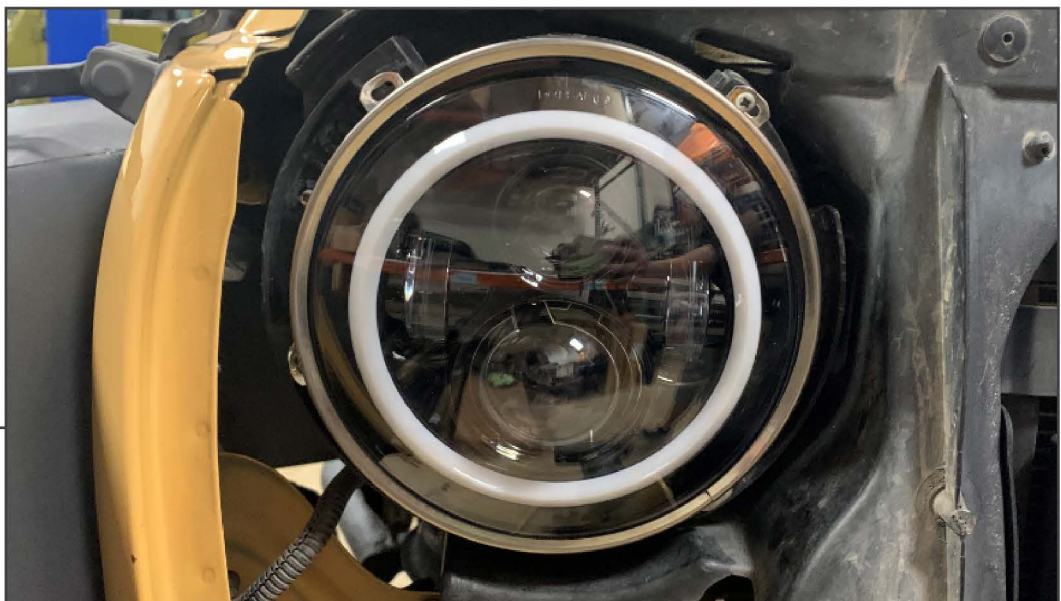

STEP 4

Connect the headlight adapter, anti-flicker harness, and RGB harness to the headlight assembly. Install the new headlight into the vehicle reusing the original trim ring and hardware.

STEP 5



Wire the RGB module to the vehicle following the diagram below.

Vehicle Harness	-	RGB Harness
Turn Signal	-	Yellow / Blue
Key On Power	-	Red
Ground	-	Black
Headlight High Beam	-	White (Halo On/Off [Flash Four Times], Optional)

STEP 6



Scan the QR code on the RGB harness. Download the app, then turn Bluetooth on. With the lights powered on, open the app and the lights will auto detect the device (Confirm in the “Group Manage” portion of the app). Press the “Power” icon at the top of the screen to change light options.

Installation is now complete.