



4" LED FOG LIGHTS W/HALO

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) Fog Lights
(2) Splice Harnesses

TOOLS REQUIRED

8mm Socket
Socket Wrench

STEP 1




Access the connectors on the rear of the fog lights from the wheel well, and remove. **Note: Light connector will be different between 07-09 and 10-18.

STEP 2



Locate the (4) factory screws, and remove. **Note: Factory hardware will be reused.

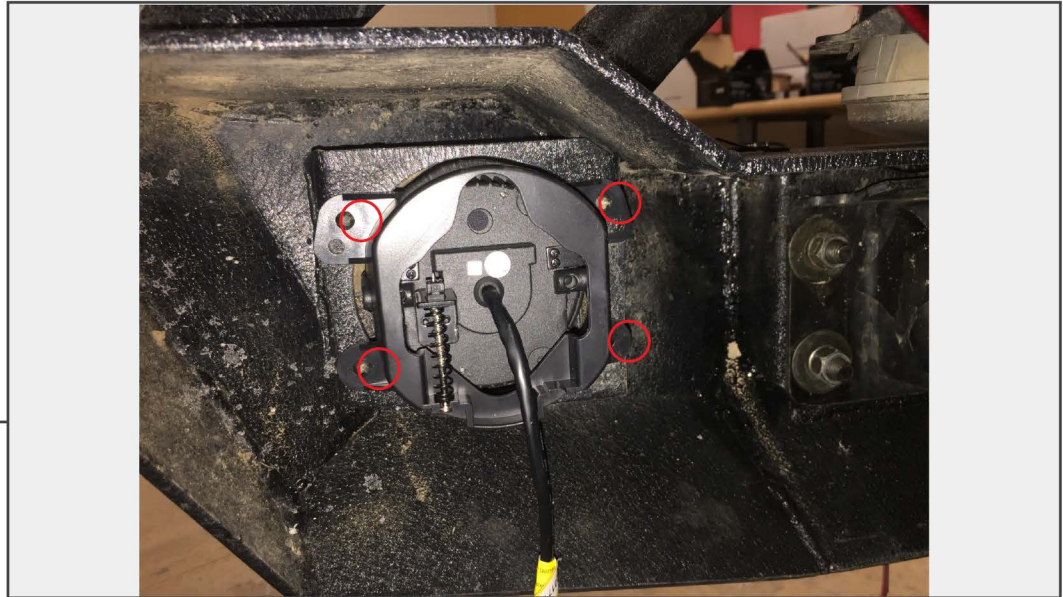

STEP 3

Install the new LED fog lights using the factory hardware.



STEP 4

Splice the fog light into the vehicle's fog light harness. The additional yellow wire and blue wire will need to be spliced into the vehicle's factory wiring. Splice the yellow 12v+ fog light wire into the white/green front side marker light wire, then the blue wire into the vehicle turn signal harness.



STEP 5

Test lights for proper function. Installation is now complete.