



LED HEADLIGHTS WITH RGB HALO

(2018-2021 WRANGLER JL, 2020-2021 GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) LED Headlights
(1) RGB Harness

TOOLS REQUIRED

Panel Removal Tool
10mm Socket
Socket Wrench




STEP 1

Open the hood on the vehicle. Using a panel removal tool, remove (6) plastic push clips from the top of the grille.



STEP 2

Firmly pull the grille away from the vehicle to release the clips securing the grille to the vehicle. Remove grille and set aside on a soft surface.

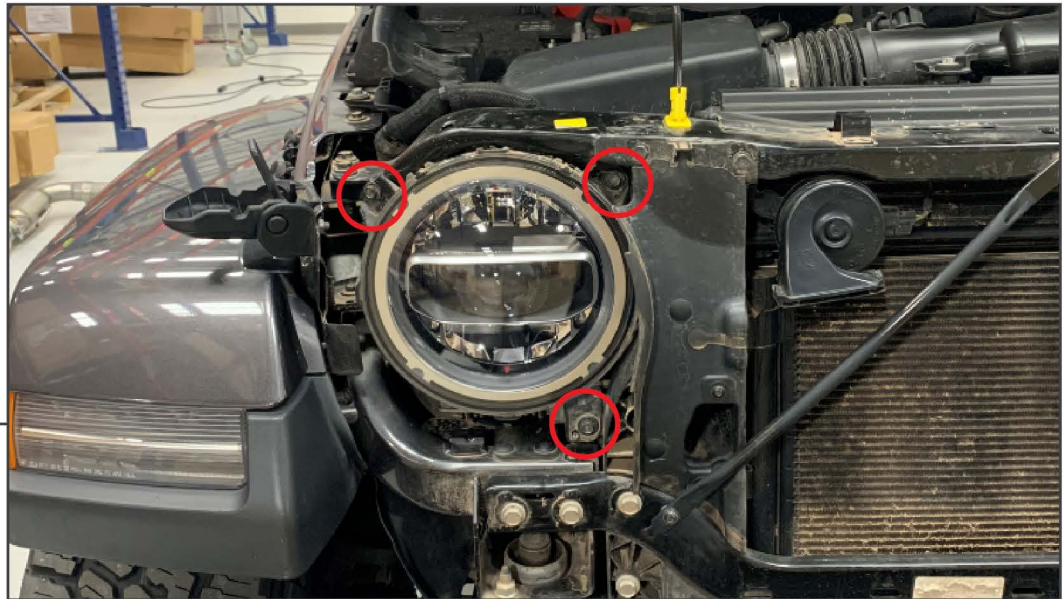

STEP 3

Remove (3) 10mm bolts from the original headlight assembly. Pull the headlight assembly away from the vehicle, then unplug the connector by pressing in the plastic tab.

Repeat procedure to the opposite side.



STEP 4

Route the RGB harness neatly along the engine bay to both headlights. Splice the RGB harness into the vehicle following the diagram below. Reassemble vehicle following steps 1-3 in reverse order.

RGB Harness	-	Vehicle Harness
Red	-	Key On Power
Black	-	Ground
Yellow	-	High Beam (Halo On/Off Switch, Optional)



STEP 5

Scan the QR code on the RGB harness. Download the app, then turn Bluetooth on. With the lights powered on, open the app and the lights will auto detect the device (Confirm in the “Group Manage” portion of the app). Press the “Power” icon at the top of the screen to change light options.

Installation is now complete.