



LED FOG LIGHTS WITH HALO

(2007-2020 WRANGLER JK & JL)


INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Pair of Fog Lights
- (2) Adapter Harnesses
- (2) Splice Harnesses


TOOLS REQUIRED

- 7mm Socket
- 8mm Socket
- Ratchet
- Panel Removal Tool

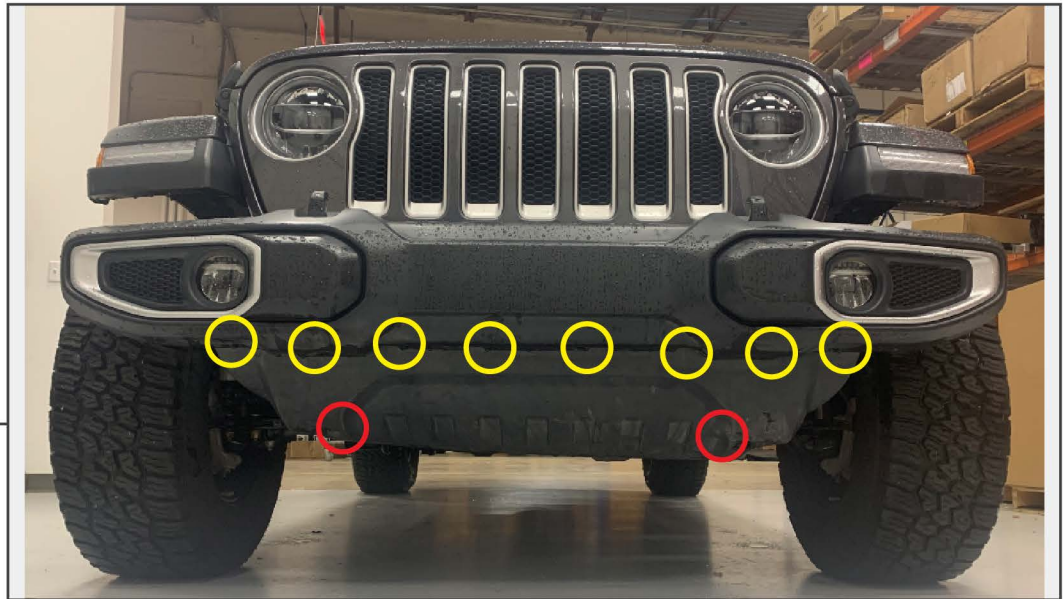


STEP 1

Remove (2) 8mm bolts from the plastic lower shield, then remove (8) plastic push clips. Remove the plastic lower shield from the vehicle.

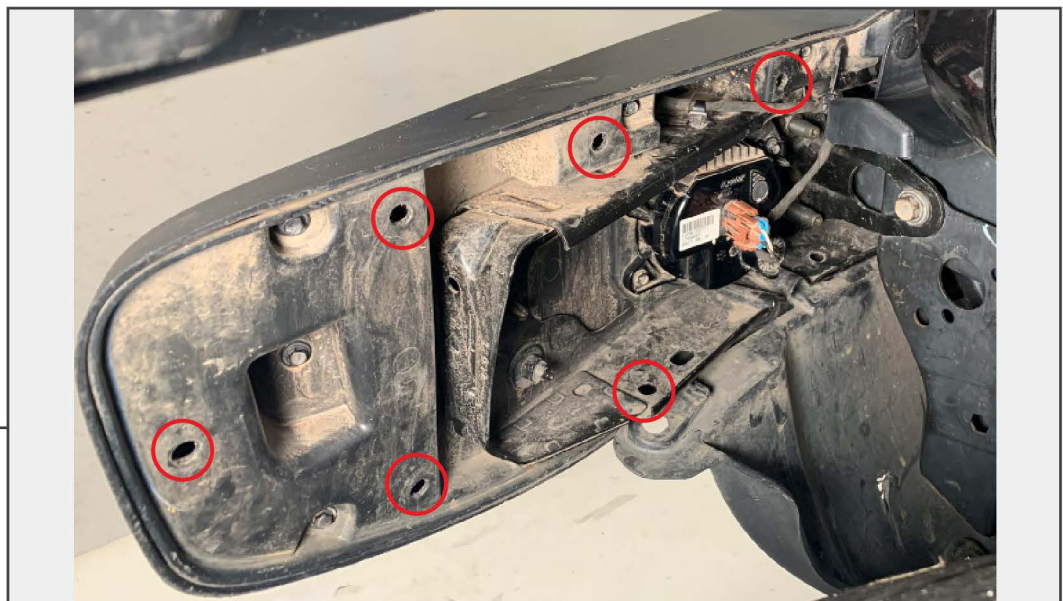

STEP 2

Remove (6) plastic push clips from the fog light cover. Remove the cover. Unplug the connector from the fog light by pressing in the tab, then pulling the connector away from the light. Repeat this procedure to the opposite side.

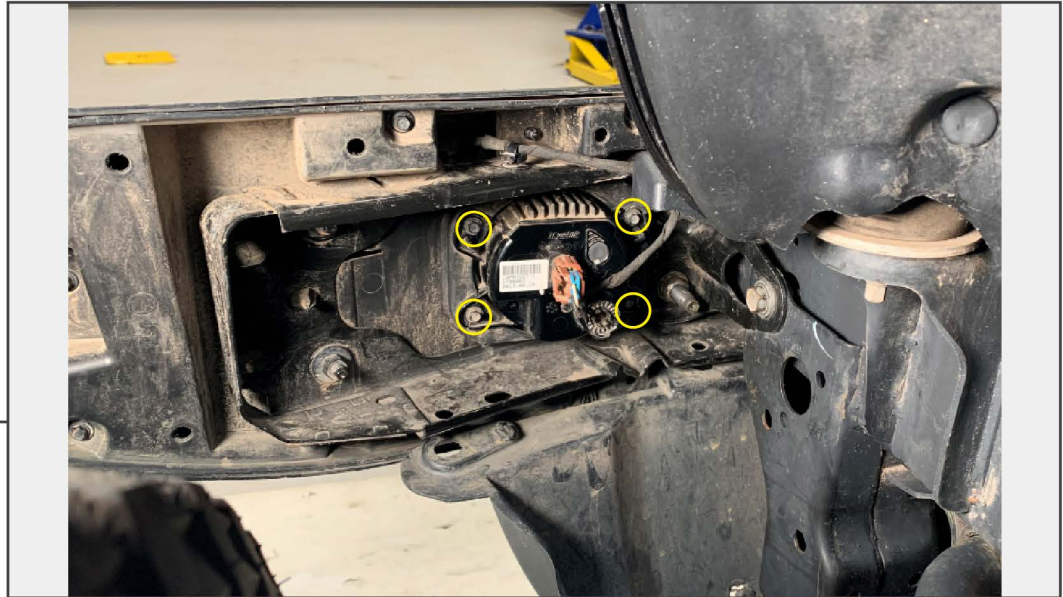

STEP 3

Remove the (4) 7mm screws securing the fog light to the vehicle. Install the LED fog light into the fog light hole using the appropriate provided bracket. Secure to the bumper reusing original hardware. Plug in the light using the original fog light harness.



STEP 4

Splice the (2) remaining wires attached to the fog light into the vehicle harness following the diagram below. Re-assemble vehicle following steps 1-3 in reverse order. Installation is now complete.

| | | |
|--------------------------|---|--------------------|
| Fog Light Harness | - | Vehicle |
| Yellow | - | DRL |
| Blue | - | Turn Signal |