

LED TURN SIGNAL

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Pair of Turn Signals

TOOLS REQUIRED


Panel Removal Tool Flathead Screwdriver





STEP 1

Open the hood. Remove (6) push clips using a panel removal tool.

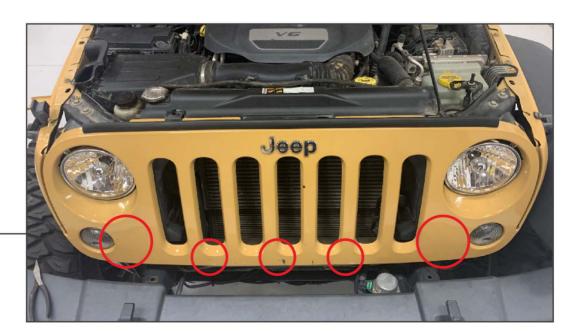

STEP 2

Firmly pull the bottom of the grille away from the vehicle to dislodge the lower clips on the grille. Unplug the turn signal harnesses from the lights, then remove the grille from the vehicle. Set grille on a soft surface.





STEP 3

Using a flathead screwdriver, push in the (2) locking tabs holding the turn signal housing into the grille. Once unclipped, push the fog light housing through the front of the grille. Repeat procedure to the opposite turn signal housing.



STEP 4

Install the LED turn signal by pushing the light housing through the front of the grille until it clicks into place. Plug the vehicle harness into the LED turn signals, then repeat steps 1-2 in reverse order to reassemble the grille to the vehicle.

Installation is now complete.