



LED THIRD BRAKE LIGHT

(2018-2020 WRANGLER JL)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Third Brake Light

TOOLS REQUIRED

22mm Socket
Socket Wrench
T-25 Torx Screwdriver
T-40 Torx Screwdriver

STEP 1



Using a T-40 Torx screwdriver, turn the back up camera lock counter clockwise, then remove the cover. Remove the spare tire from the vehicle using a socket wrench and a 22mm socket.

STEP 2




Remove (7) T-25 Torx screws from the spare tire carrier. Separate the two plastic covers.



STEP 3

Unplug the third brake light by pressing in the tab on the connector. Remove (2) T-25 Torx screws to remove the tail light from the housing.

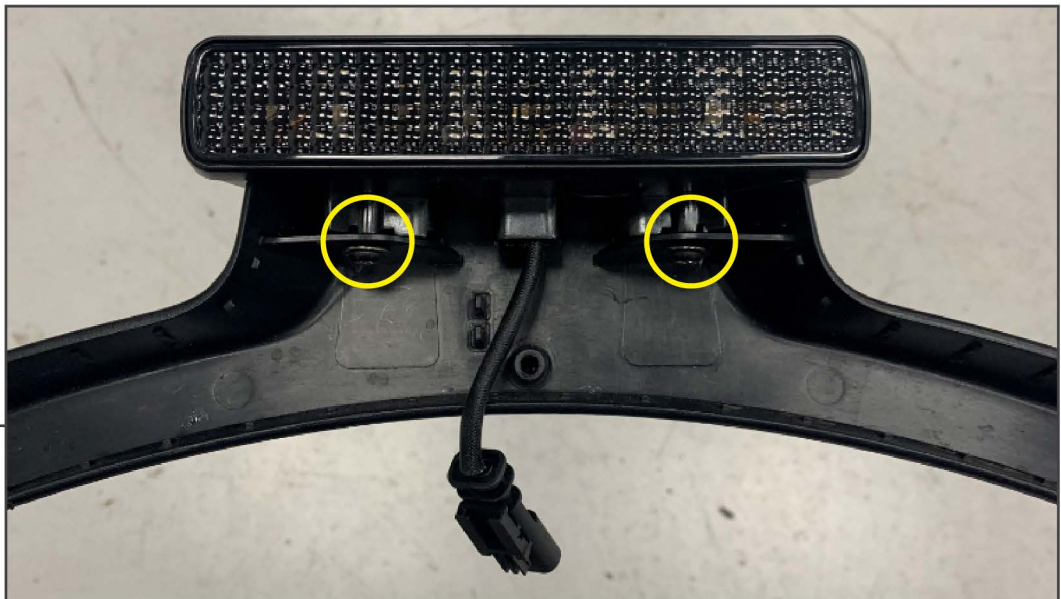

STEP 4

Place the new third brake light onto the light housing. Reuse the original T-25 Torx screws to secure the brake light. Plug the brake light into the original third brake light harness on the vehicle.

Note: The screws will be creating threads into the light, tighten until secure.



STEP 5

Reassemble tire carrier following steps 1-2 in reverse order. Installation is now complete.