



TURN SIGNAL LAMP

(2007-2018 WRANGLER JK)


INSTALLATION INSTRUCTIONS

CONTENTS

(1) LH Turn Signal Housing
(1) RH Turn Signal Housing


TOOLS REQUIRED

Panel Removal Tool
Flathead Screwdriver

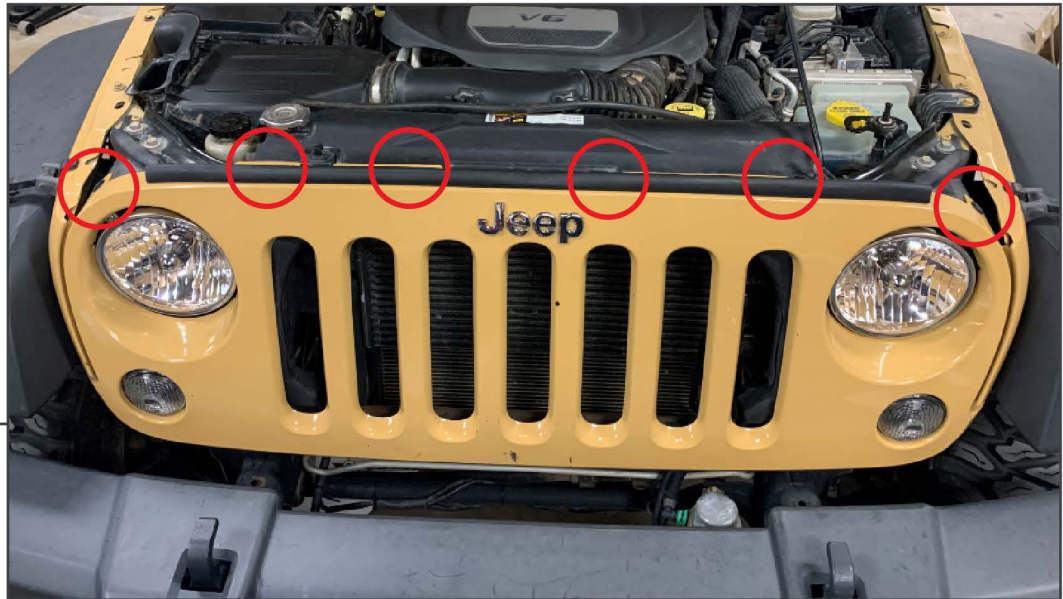

STEP 1

Open the hood. Remove (6) plastic push clips from the top of the grille using a panel removal tool.

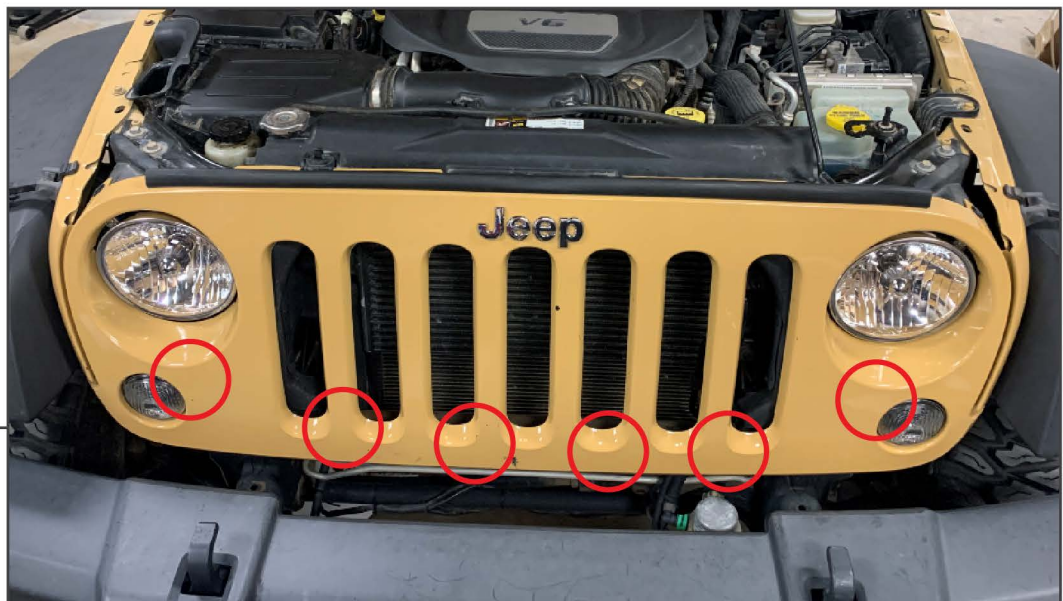

STEP 2

Firmly pull outward on the grille to release the (6) metal clips along the bottom of the grille.

STEP 3



Un-twist the light bulb from the backside of the light housing. Repeat this procedure to the opposite side. Place the grille on a soft surface.

STEP 4



Using a flathead screwdriver, press in the (2) plastic tabs on the backside of the light housing. The light housing will remove through the front of the grille.



STEP 5

Install the new light housing into the grille by pushing the housing through the front of the grille until the tabs click into place. Re-install the grille to the vehicle following steps 1-3 in reverse order.

Installation is now complete.