



# HEADLIGHT GUARDS

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---


(2) Headlight Guards

### TOOLS REQUIRED

---

Panel Removal Tool  
T-15 Torx Screwdriver

SKU # J150574

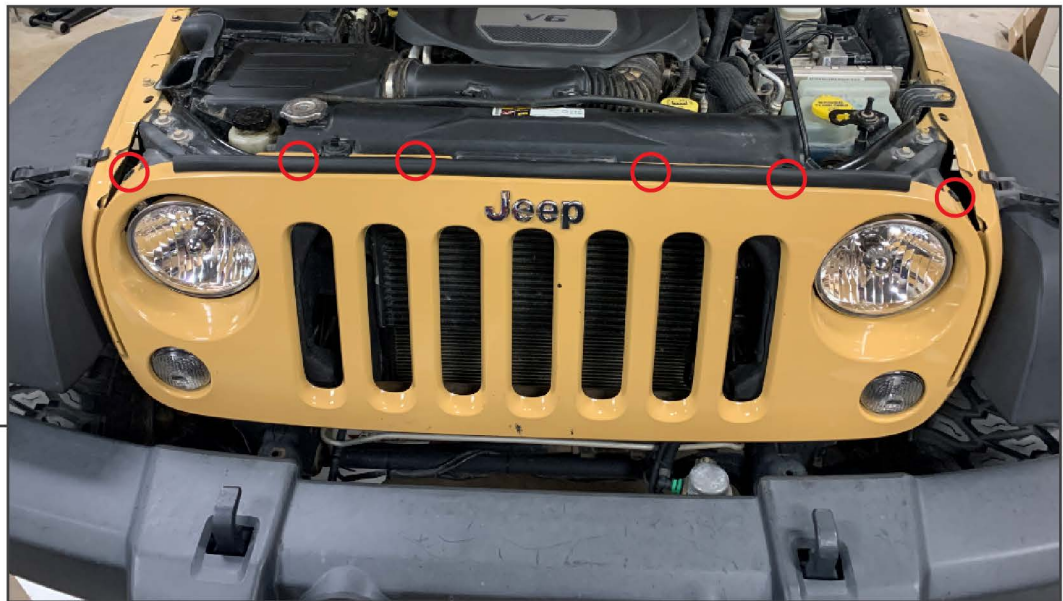


**STEP 1**

Open the hood on the vehicle. Remove (6) plastic clips from the upper portion of the grille.



**STEP 2**

Firmly pull the lower portion of the grille away from the vehicle to dislodge the lower clips from the radiator support. Once pulled away, disconnect the fog lights from the grille. Set the grille on a soft surface.

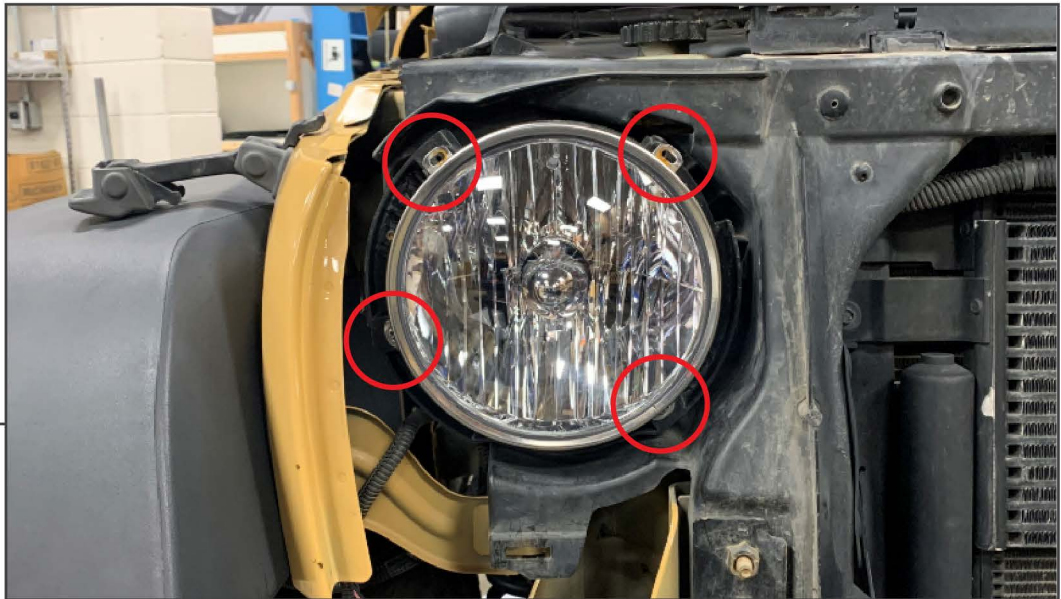

---

**STEP 3**

Remove (4) T-15 Torx screws from the headlight assembly. Remove the headlight retaining ring. Repeat this procedure to the opposite side.



---

**STEP 4**

Install the headlight guard in place of the original headlight retaining ring. Re-assemble the vehicle following steps 1-3 in reverse order. Repeat this procedure to the opposite side.

Installation is now complete.