

## WINDSHIELD WASHER NOZZLES

(2007-2018 WRANGLER JK)

**INSTALLATION INSTRUCTIONS** 

**CONTENTS** 

(2) Windshield Washer Nozzles

**TOOLS REQUIRED** 

Flathead Screwdriver





STEP 1


Open the hood on the vehicle. Locate the washer nozzles under the hood.



STEP 2

Pull the rubber hose away from the washer nozzle.



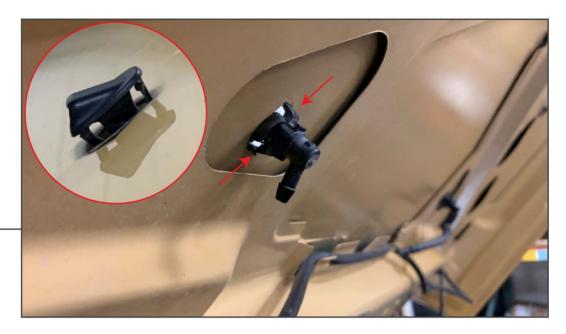

STEP 3

Using a flathead screwdriver, pry down on the (2) plastic tabs securing the nozzle to the hood. Push the nozzle towards the outside of the hood for removal.



STEP 4

Place the new washer nozzle in place of the original. Press down to secure the nozzle into place. Reconnect the rubber hose. Repeat steps 1-4 to the remaining washer nozzle.

Installation is now complete.