

# DOT APPROVED 7” LED HEADLIGHT WITH HALO

(1997-2006 WRANGLER TJ)  
(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

(1) Pair of LED Headlights  
(2) Anti-Flicker Harnesses  
(2) Headlight Adapters

### TOOLS REQUIRED

---

Panel Removal Tool  
T15 Torx Screwdriver  
Wire Strippers



**STEP 1**

Open the hood. Remove (6) plastic push clips using a panel removal tool.



**STEP 2**


Firmly pull the lower portion of the grille away from the vehicle to dislodge the lower clips from the grille. Unplug the turn signal harnesses from the turn signal housings.

**STEP 3**



Remove (4) T15 Torx screws from the headlight assembly. Unplug the connector from the light by sliding back the red slider, then pushing down the plastic tab. Remove the light from the vehicle.

**STEP 4**

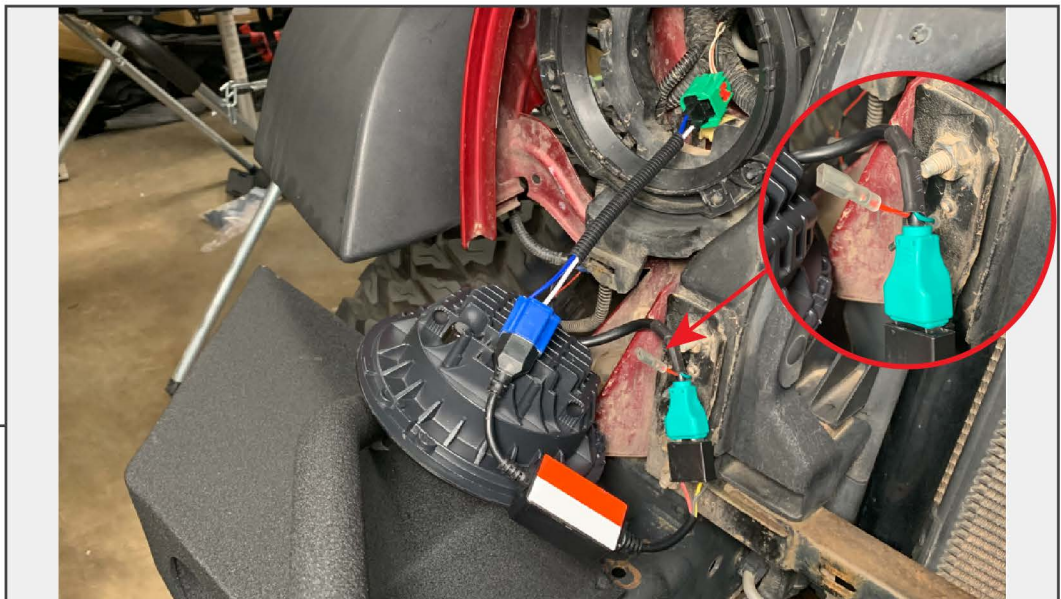

Connect the headlight adapter and anti-flicker harness to the headlight assembly. Connect the (1) wire attached to the headlight assembly to the vehicle harness following the wiring diagram below. Install the new headlight into the vehicle reusing the original trim ring and hardware.

<u>Vehicle Harness</u>	-	<u>Headlight Harness</u>
Parking Light Power	-	Red





---

**STEP 5**

Re-assemble vehicle following steps 1-3 in reverse order.

Installation is now complete.