

1) WATCH THE DIY INSTALLATION VIDEO GUIDE:




WATCH
THE COMMON STATEMENT OF THE COMMON STATEMENT OF



2) WIRING INFO:

The ORACLE Lighting Oculus™ Bi-LED 9"
Siwtch-Back headlights come with a pair of
Plug & Play harness adapters which plug into the
factory harness connector located in the fender
behind the factory fender liner. The driver side
connector can also be accessed from under the
hood if you prefer not to remove the driver side
fender liner for access. Simply plug in the
harness and the AMBER Halo lights will work
with the factory turn signal and the WHITE Halo
lights will work with the Parking Lights. To
activate the parking lights you can manually turn
the headlight switch to the parking light position
during the day or AUTO at night they will also
come on with the headlights.

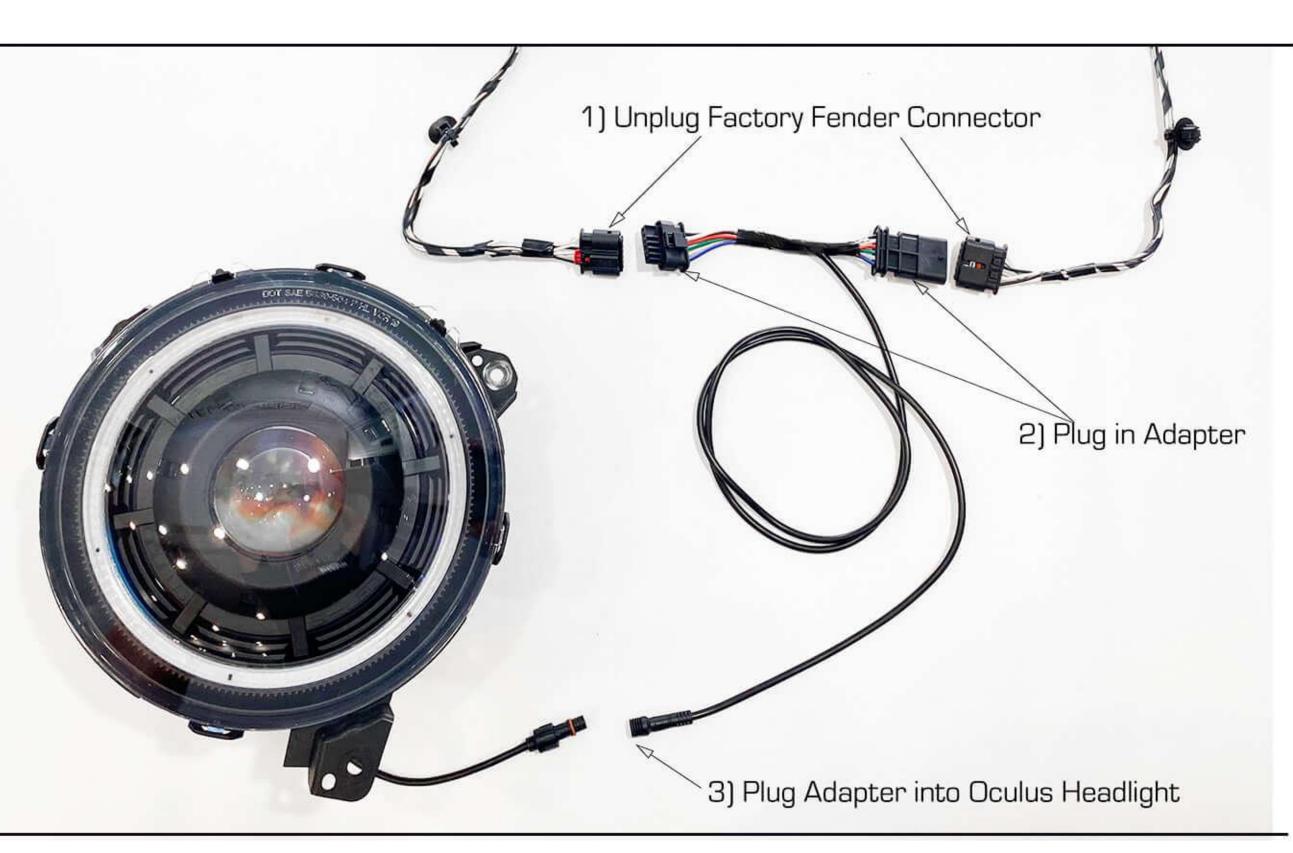

3) USE THE ORACLE FAQ RESOURCE PAGE:

NOTE: If you do not reconnect the factory turn signal ORACLE Part # 5013-504 will be needed to prevernt hyperflash.

Visit www.oraclelights.com/oculus for information and videos on common questions and tips & tricks for using your lights. All Oculus Bi-LED Headlights come from the factory with a baseline headlight level but depending on your lift, tires, etc you may need to adjust the beam level to insure maximum light on road for best visibility while creating minimal glare. To adjust remove the adjusting screw can and use the included tool to level the beam. Visit our FAQ page for more details.

