



# UNDER SEAT LOCK VAULT - DRIVER SIDE

(2007-2010 WRANGLER JK - 2 DOOR)

(2007-2018 WRANGLER JK - 4 DOOR)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) Lock Vault
- (2) Keys
- (1) Mounting Bracket
- (3) M5x0.8 x 8mm Bolts
- (3) M5 Flat Washers

### TOOLS REQUIRED

---

- Phillips Screwdriver
- T-30 Torx Socket
- 18mm Socket
- Ratchet

SKU # J155400

## STEP 1




Align the mounting bracket to the vault. Secure the mounting bracket to the vault using (3) M5 x 8mm screws and (3) M5 flat washers. Tighten until secure.

## STEP 2 (11-18 JK ONLY)



11-18 JK: Remove (2) T-30 Torx bolts from the under seat bracket.

Note: Hardware will not be reused.

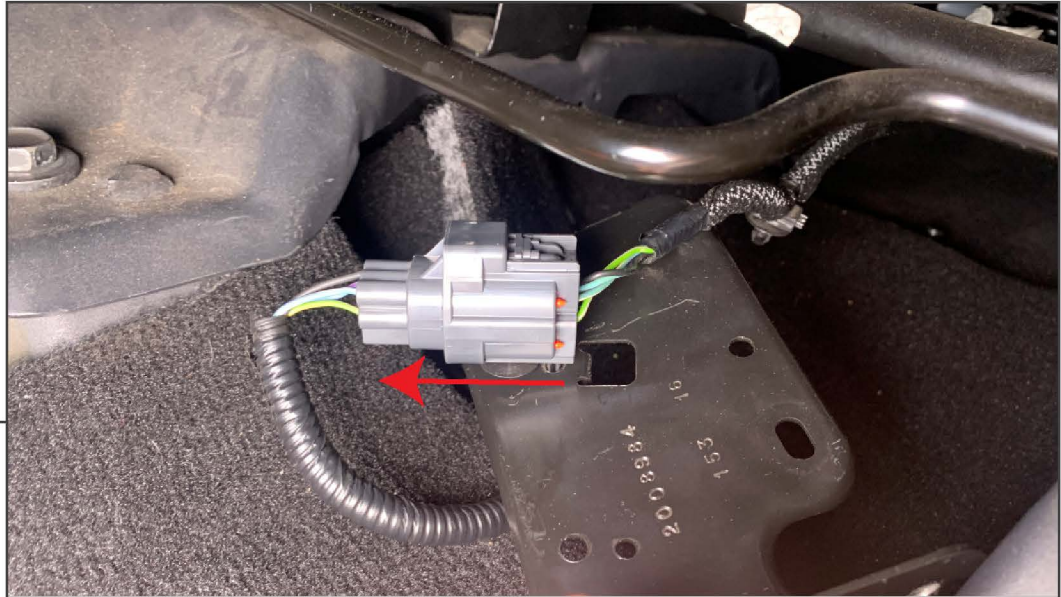

**STEP 3**  
**(11-18 JK**  
**ONLY)**

**11-18 JK:** Slide the electrical connector off of the mounting bracket. Unplug the electrical connection, and tuck the connectors aside to ensure clearance for vault.

Note: Mounting bracket will not be reused.




**STEP 4**

Remove (2) 18mm bolts from the front seat brackets.


Note: Hardware will be reused.

## STEP 5

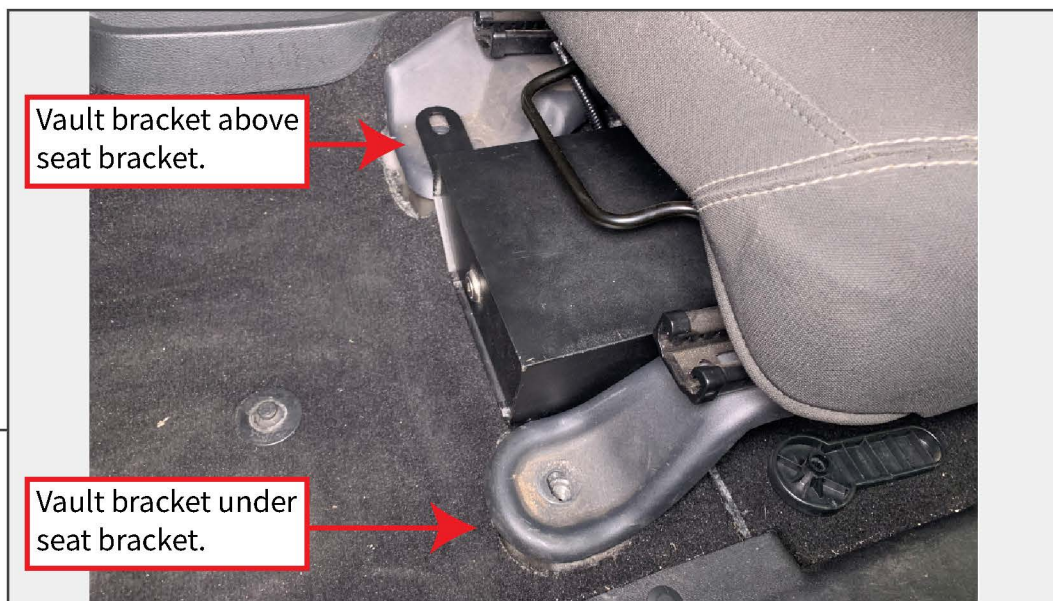

Insert the vault under the seat, ensuring the lower mounting bracket on the vault is under the seat bracket.

## STEP 6

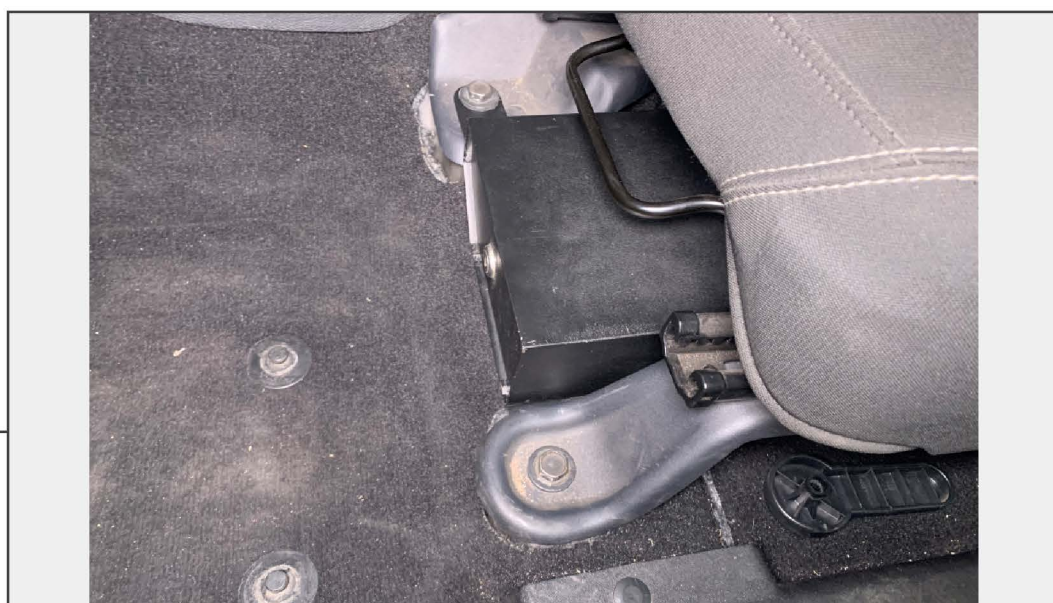

Re-install the (2) 18mm bolts into the seat brackets. Tighten each bolt to 45 ft-lbs.



---

## STEP 7

Plug in the seat electrical connectors. Neatly secure the wiring away from any moving components.



---

## STEP 8

Installation is now complete.