

LED TAILGATE LIGHT

(2018-2021 WRANGLER JL)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) Tailgate Light Assembly
- (1) Wiring Harness
- (8) Wire Hold-Downs
- (8) Adhesive Pads

TOOLS REQUIRED

T-15 Torx Screwdriver Isopropyl Alcohol Microfiber Cloth



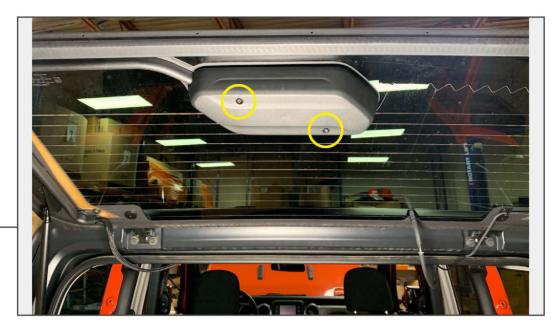

STEP 1

Open the tailgate and rear glass on the vehicle. Remove (2) T-15 Torx screws from the plastic cover located on the rear glass. Remove the rear plastic cover from the vehicle.



STEP 2

Plug the wiring harness attached to the back of the new LED light to the included wiring harness. Route the wiring harness towards the cutout in the LED light housing. Install the LED light to the vehicle using the original (2) T-15 Torx screws.





STEP 3

Using (8) wire hold-downs and (8) adhesive pads, route the wiring harness down the window channel of the hard top. Route the wiring harness under the hard top glass gasket, into the interior of the vehicle.

Note: Ensure wiring has enough slack to allow rear glass to open and close without placing tension on the wiring harness. Clean panels with isopropyl alcohol prior to use adhesive pads.



STEP 4

Plug the light wiring harness into the 12V port located in the rear of the vehicle. Neatly route any excess wiring under the rear interior panels.

Installation is now complete.