



NEOPRENE SEAT COVERS

(2013-2018 WRANGLER JK - 4 DOORS)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Driver Side Front Seat Cover
- (1) Passenger Side Front Seat Cover
- (2) Front Seat Headrest Covers
- (1) Driver Side Rear Seat Cover
- (1) Passenger Side Rear Seat Cover
- (2) Rear Seat Headrest Covers

TOOLS REQUIRED

Vacuum Cleaner (Optional)

SKU # J157733

**STEP 1
(FRONT)**



Begin by removing the headrest on each side, and sliding over the new headrest covers. Secure the cover to the headrest by velcroing them in place.

STEP 2



With the headrest still removed, place the upper seat cover portion over the seat, and secure by tucking the velcro sleeve in-between the upper and lower part of the seat to the back to velcro in place.

STEP 3



Once the upper portion of the seat cover is installed, tuck the seat cover under the tabs for the headrest guides.

STEP 4



Install the lower portion of the seat cover to the seat. Tuck the two buckles through the upper and lower seat joint. Route the straps under the seat from front to back. Tuck the seat cover around the seat lever.

STEP 5



Connect the (2) front to back and (1) side to side clips to secure the seat cover to the lower portion of the seat. Then pull tight on the strap to ensure the seat cover is tight to the seat.

STEP 6



Installation for the front seat covers is now complete.

STEP 7 (REAR)



Begin by unzipping the back of the upper rear passenger/middle seat cover and slide it over the headrest and down the seat. Do the same for the driver side. Then, zipper the middle section closed, and slide the flap in-between the headrest and seat. Velcro to secure. Tuck the velcro flap in-between the upper and lower seat section, and velcro to secure. ***Note:** The rear headrest do not come out, the covers will slide over top of them.

STEP 8




Slide on the (2) rear headrest covers. These just slide on, and do not velcro.



STEP 9

Insert the lower passenger and driver side seat covers. Tuck the buckles in-between the upper and lower seat section.

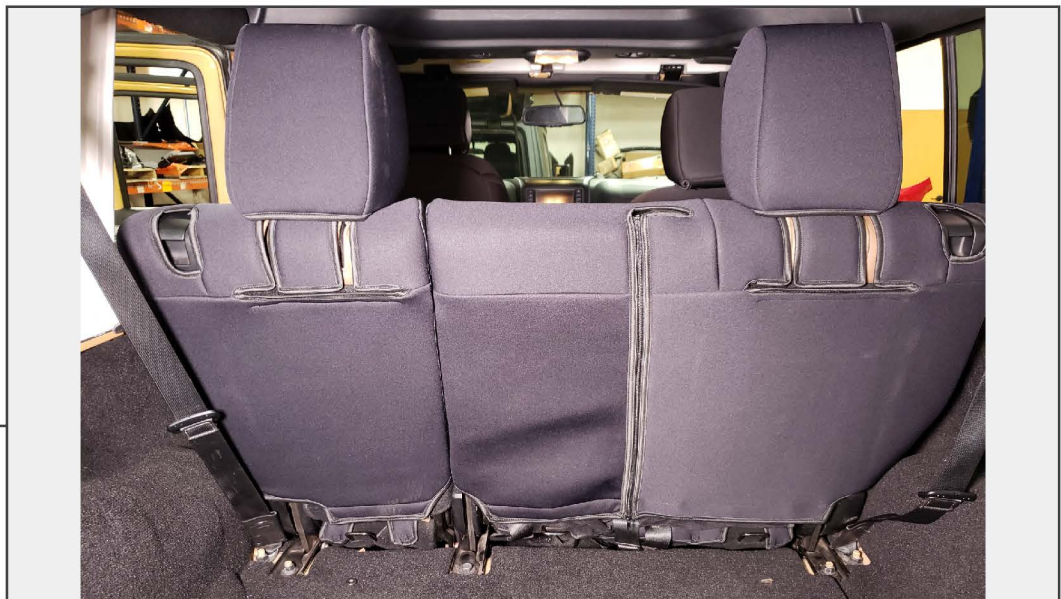

STEP 10

From the back of the rear seats, pull the buckles from the lower seat cover and tuck under the seat.

STEP 11



From underneath the seat, connect the front to back straps to the buckles. Pull tight on the strap to secure the cover to the lower seats.

STEP 12



Installation for the rear is now complete.