



DOOR STORAGE HANGERS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS


(2) Hinge Brackets
(2) Latch Brackets
(10) 9/16" Lag Bolts

TOOLS REQUIRED

Stud Finder
Level
Tape Measure
9/16 Socket
T-50 Torx Socket
Ratchet

SKU #
J157749 / J157750

STEP 1 (FRONT DOOR)

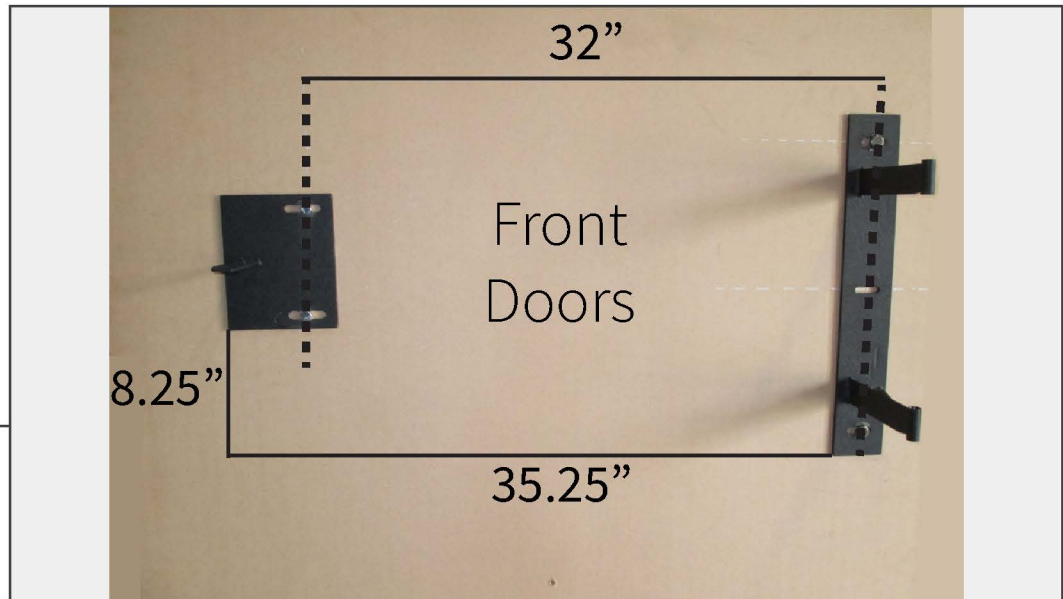

Locate a suitable location to mount the door brackets. The door brackets require (2) wall studs to secure the door, one for the hinge bracket and one for the latch bracket.


Once the appropriate mounting studs have been located, install (1) bolt through the bracket into the wall. Install the remaining (2) bolts once the bracket is properly placed.

With the hinge bracket securely mounted, measure the placement of the latch bracket following the diagram above. Do not secure hinge bracket at this time.

STEP 2



Locate the vehicle door hinge brackets. Remove (2) T-50 Torx hinge nuts to allow the door to be removed.

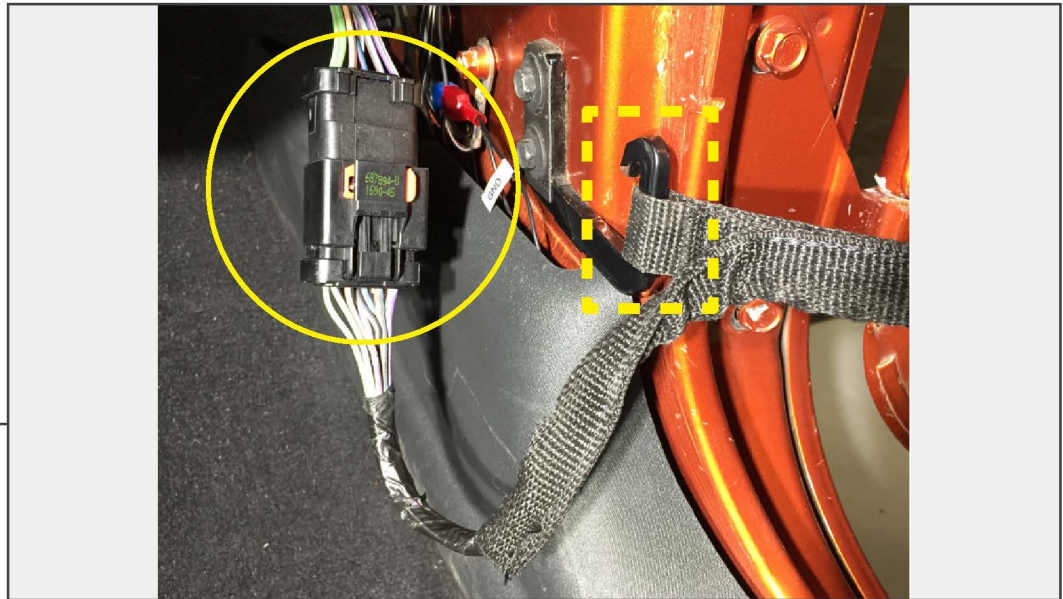

STEP 3

Locate the door wiring harness. Slide the red locking tab outward, then depress the black tab on the connector to release the electrical connection. Once disconnected, lift the door strap over the retaining hook.



STEP 4

Lift the door off of the vehicle and onto the previously mounted door hinge bracket. Verify the latch bracket location on the wall, then secure into place.


Note: The door may sag under its own weight depending on the condition of the wall. Leveling the door (pulling upward on the door) may be required to mount the door level onto the latch bracket using the provided measurements.

STEP 5



Front door mounting hanger installation is now complete.

STEP 6 (REAR DOOR)

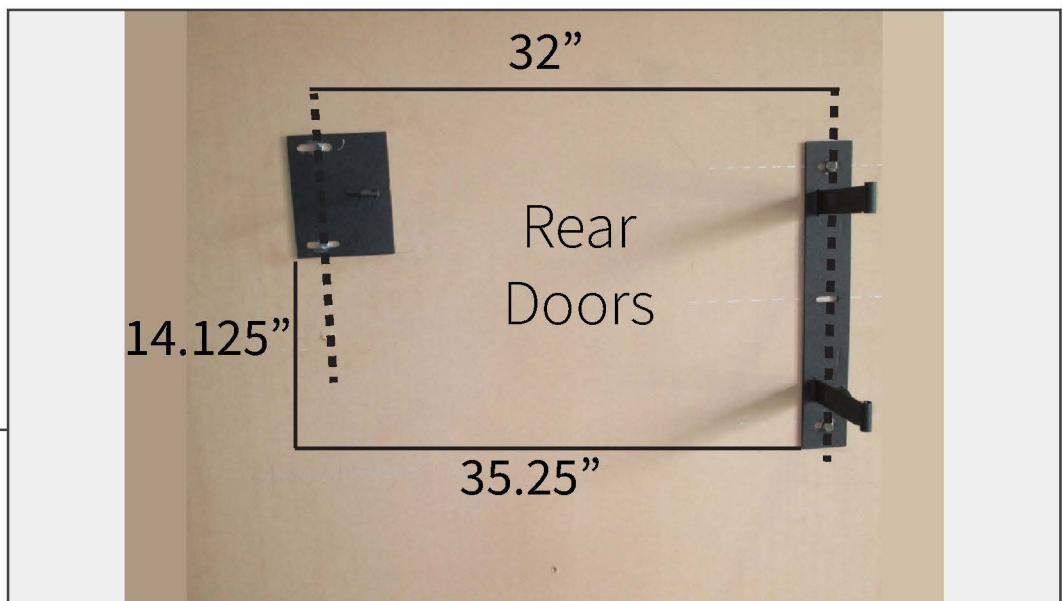

Locate a suitable location to mount the door brackets. The door brackets require (2) wall studs to secure the door, one for the hinge bracket and one for the latch bracket.

Once the appropriate mounting studs have been located, install (1) bolt through the bracket into the wall. Install the remaining (2) bolts once the bracket is properly placed.

With the hinge bracket securely mounted, measure the placement of the latch bracket following the diagram above. Do not secure hinge bracket at this time.

STEP 5



Locate the vehicle door hinge brackets. Remove (2) T-50 Torx hinge nuts to allow the door to be removed.

STEP 6



Locate the door wiring harness. Slide the red locking tab outward, then depress the black tab on the connector to release the electrical connection. Once disconnected, lift the door strap over the retaining hook.



STEP 5

Lift the door off of the vehicle and onto the previously mounted door hinge bracket. Verify the latch bracket location on the wall, then secure into place.

Note: The door may sag under its own weight depending on the condition of the wall. Leveling the door (pulling upward on the door) may be required to mount the door level onto the latch bracket using the provided measurements.



STEP 6

Rear door mounting hanger installation is now complete.