



HALO LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (2) Resistor Brackets
- (4) Small Phillips Screws
- (4) M4 Bolts
- (4) M4 Nuts
- (4) 'S' Clips

TOOLS REQUIRED


- Phillips Screwdriver
- 5mm Allen Key/Socket
- Ratchet
- Exterior Detailer
- Microfiber Cloth

STEP 1

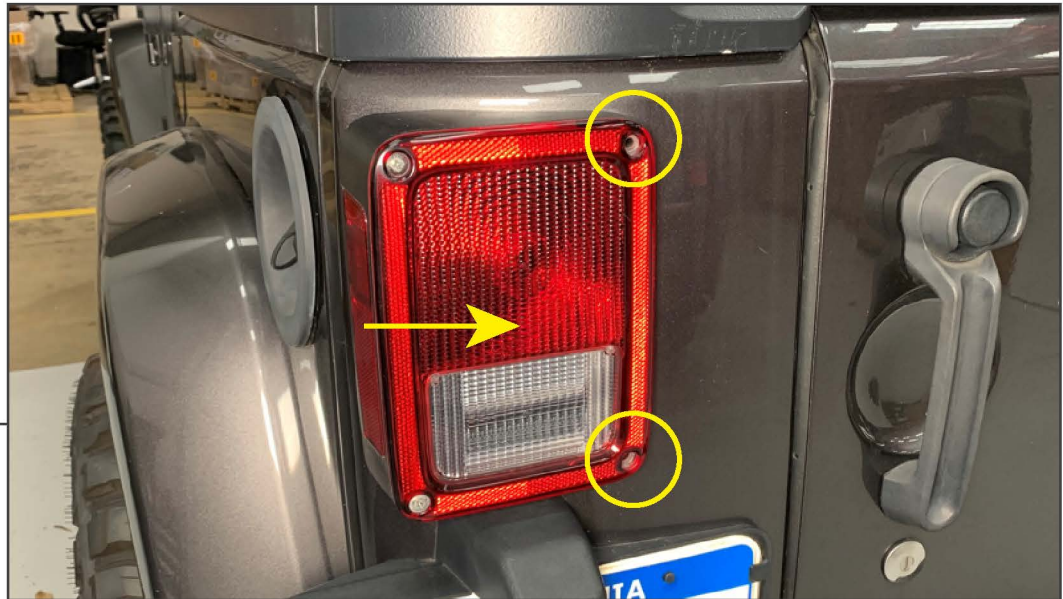

Remove the (2) inner Phillips head screws from the tail light assembly. Push the tail light towards the middle of the vehicle to dislodge the inner clips.

STEP 2

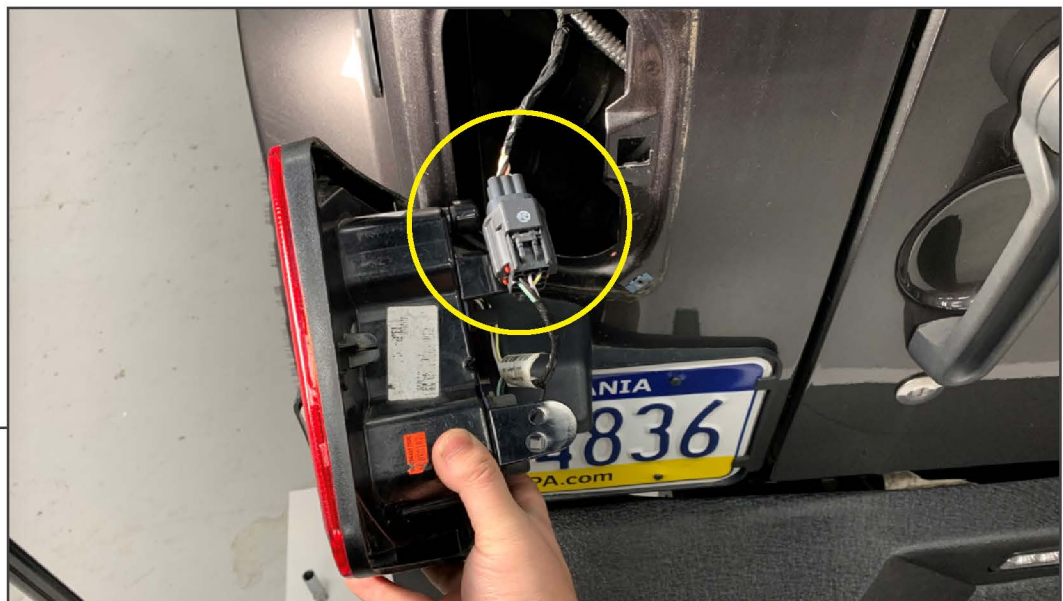


Unplug the (1) electrical connector from the tail light by pressing the plastic tab while separating the harnesses.

STEP 3



Clean the tail light mounting area of the vehicle using exterior detailer and a microfiber cloth.

STEP 4

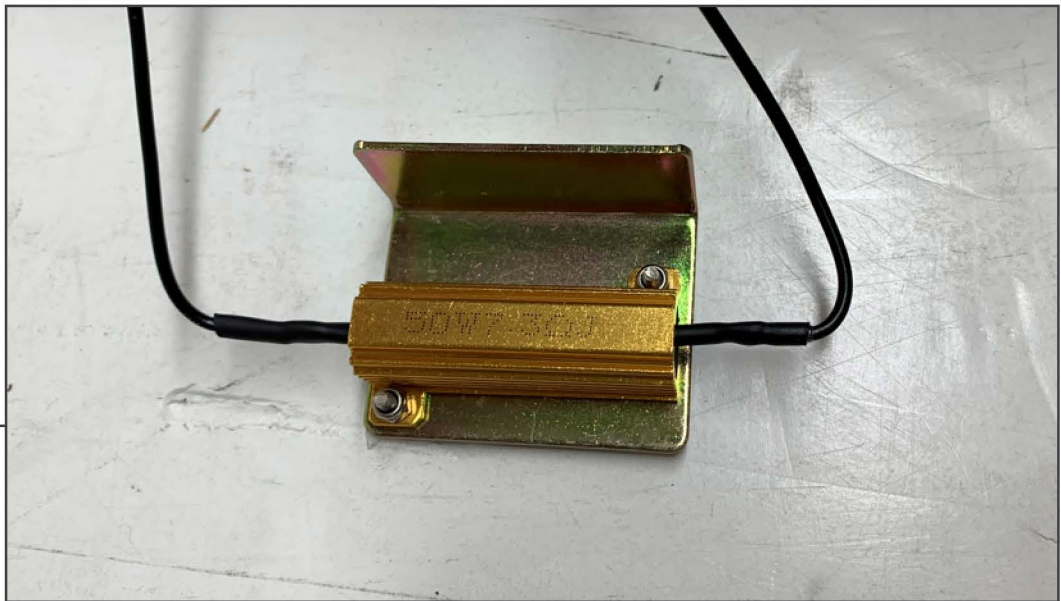


Mount the resistor to the resistor bracket using the supplied M4 hardware. Hold the M4 nut with pliers while tightening the bolt using a Phillips head screwdriver.



STEP 5

Using (2) 'S' clips per bracket, clip the resistor bracket to the vehicle. Plug the vehicle tail light wiring harness into the new tail light.

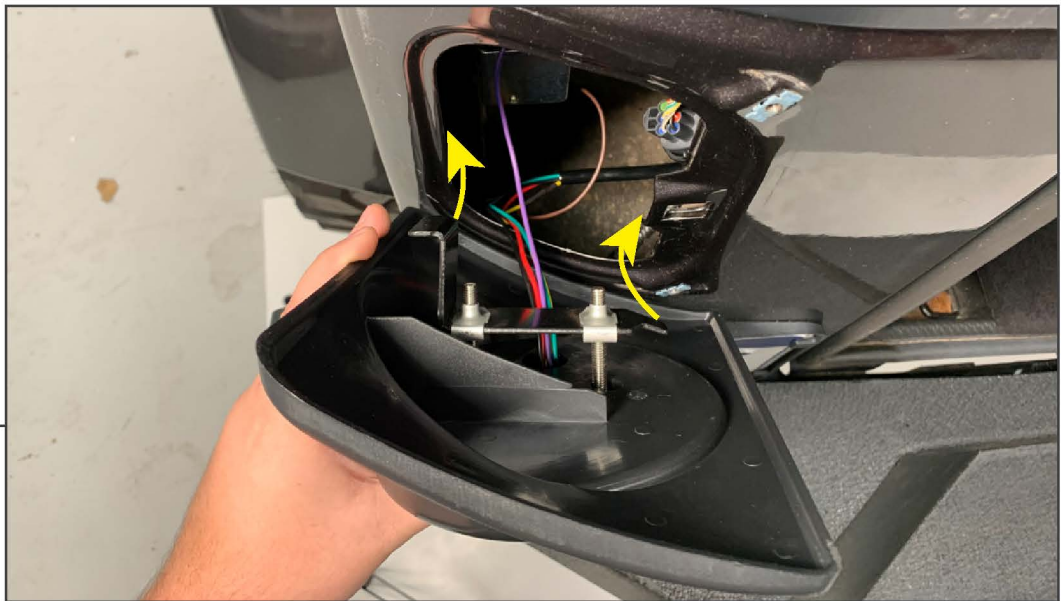

STEP 6


Loosen the (2) Allen bolts on the face of the tail light assembly to allow the rear mounting bracket to move. Maneuver the bracket under the vehicle quarter panel in the designated locations.



STEP 7

With the bracket properly aligned within the quarter panel, tighten the (2) Allen bolts to secure the tail light into place.

Note: Tighten hardware evenly while verifying proper alignment on the vehicle.

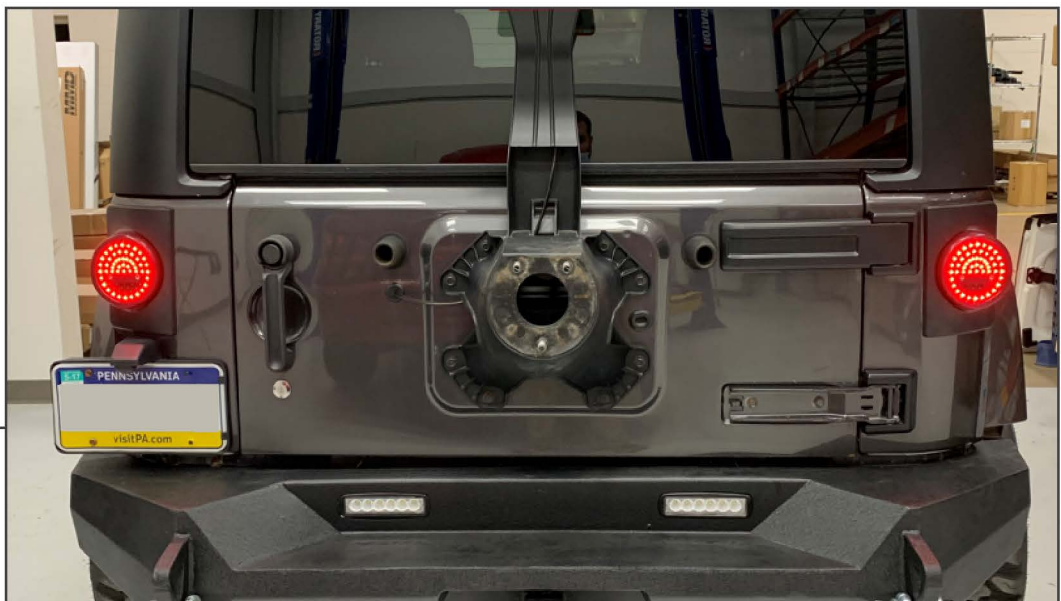

STEP 8

Repeat steps 1-7 to the opposite side of the vehicle.

Installation is now complete.