



# CARVER LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) LH Tail Light
- (1) LH Tail Light Bracket
- (1) RH Tail Light
- (1) RH Tail Light Bracket
- (2) Resistor Brackets
- (4) Small Phillips Screws
- (4) M4 Bolts
- (4) M4 Nuts
- (4) 'S' Clips
- (2) Alcohol Prep Pads


### TOOLS REQUIRED

---

- Phillips Screwdriver
- Pliers


J164241

## STEP 1

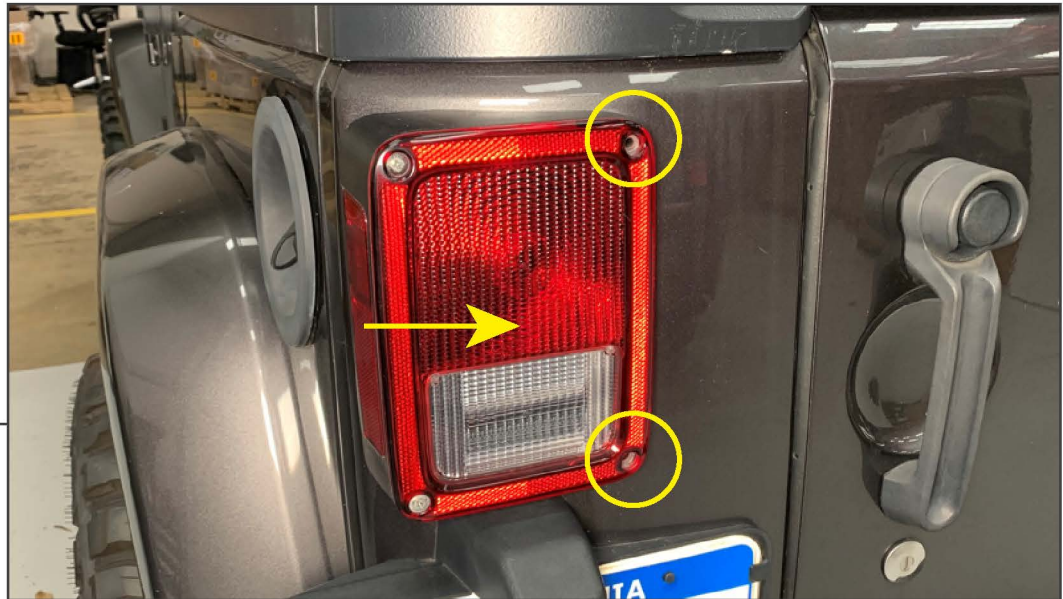

Remove the (2) inner Phillips head screws from the tail light assembly. Push the tail light towards the middle of the vehicle to dislodge the inner clips.

## STEP 2

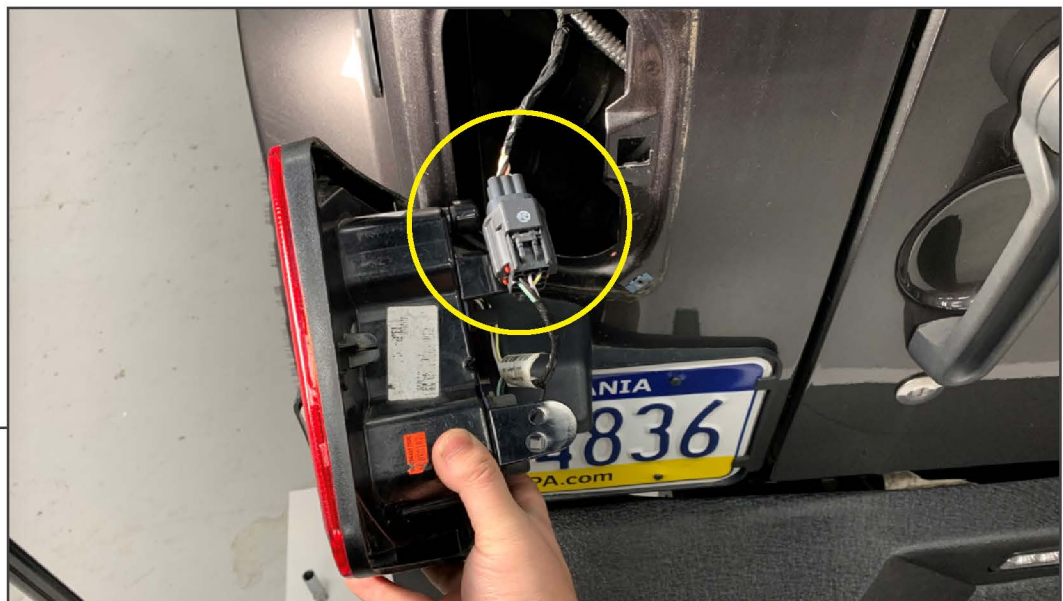

Unplug the (1) electrical connector from the tail light by pressing the plastic tab while separating the harnesses.

**STEP 3**



Clean the tail light mounting area of the vehicle using (1) alcohol prep pad.

**STEP 4**



Remove the tape backing from the 3M tape attached to the tail light bracket.

## STEP 5



Align the alignment tab in the tail light bracket to the vehicle, then push the panel inwards to lock the outer tabs into place. Ensure the (2) bolt holes remain aligned with the vehicle. Once properly aligned, press the tail light bracket into the vehicle to adhere the tape to the vehicle body panel.

## STEP 6



Secure the tail light bracket to the vehicle using the (2) original Phillips head tail light screws.




## STEP 7

Mount the resistor to the resistor bracket using the supplied M4 hardware. Hold the M4 nut with pliers while tightening the bolt using a Phillips head screwdriver.




## STEP 8

Using (2) 'S' clips per bracket, clip the resistor bracket to the vehicle. Plug the vehicle tail light wiring harness into the new tail light.

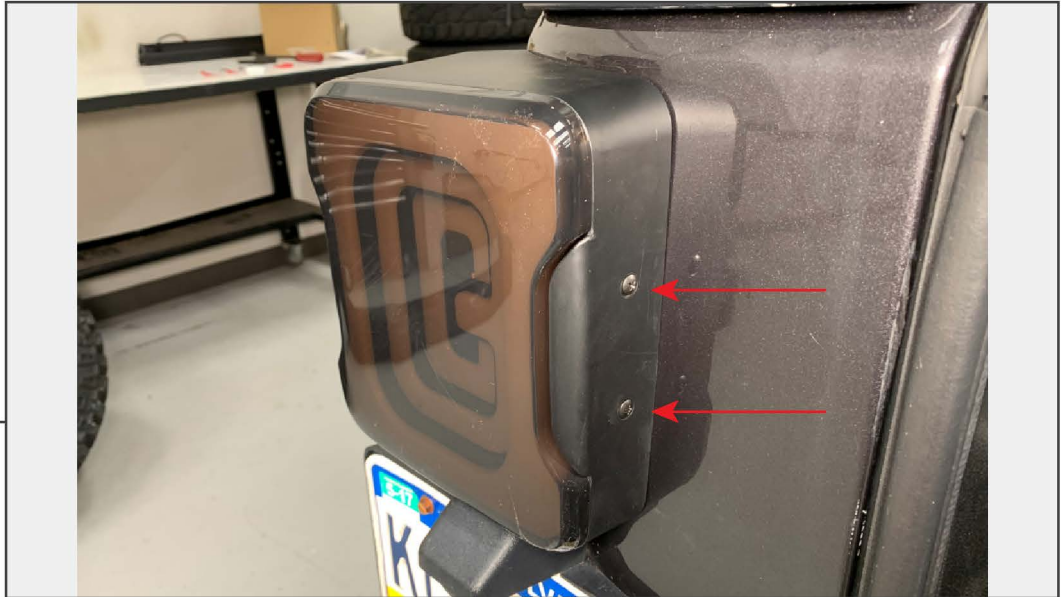

## STEP 9

Align the tail light to the tail light bracket on the vehicle. Secure the tail light into place using (2) small Phillips screws.

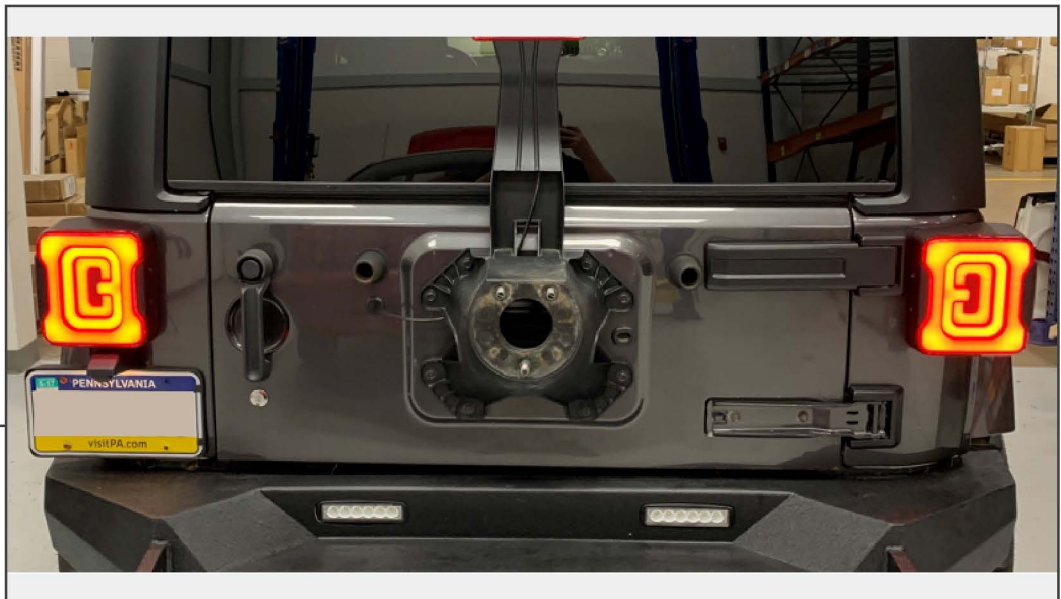

## STEP 10

Repeat steps 1-9 to the opposite side of the vehicle.

Installation is now complete.