



# V2 GOLIATH GRILLE WITH LED DRL

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS


---

- (1) Grille
- (1) Weatherstrip
- (8) Vampire Clips
- (5) Wire Holders
- (1) Fuse Tap
- (1) ScotchLok Connector
- (6) Push Clips

### TOOLS REQUIRED

---

- Panel Removal Tool
- Flathead Screwdriver
- Wire Strippers/Crimpers
- Isopropyl Alcohol
- Microfiber Cloth

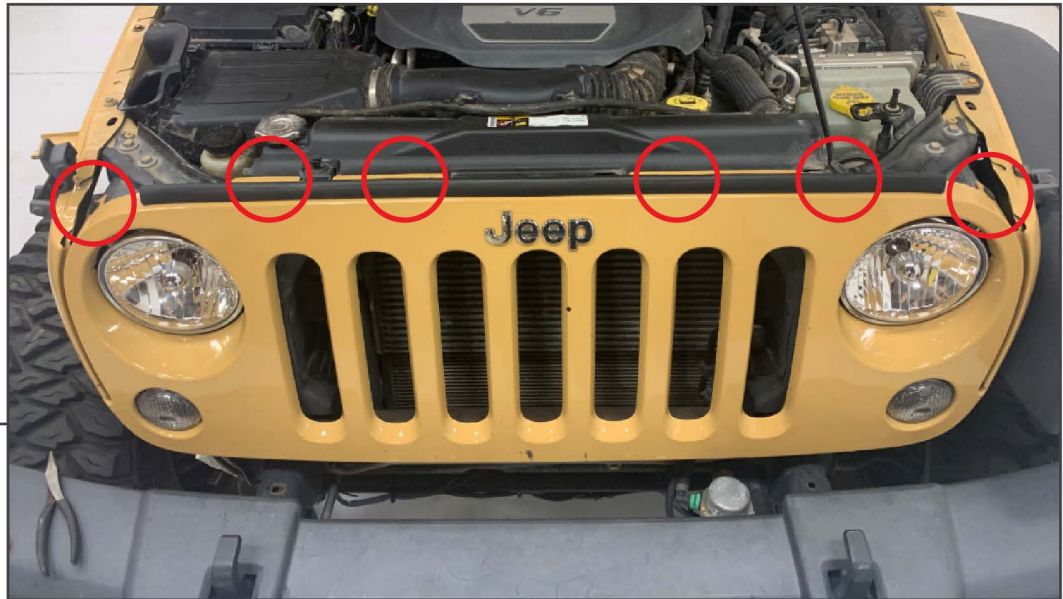

**STEP 1**

Open the hood. Remove (6) plastic push clips using a panel removal tool.



**STEP 2**

Firmly pull the lower portion of the grille away from the vehicle to dislodge the lower clips from the grille. Unplug the turn signal harnesses from the turn signal housings.

**STEP 3**


Using a flathead screwdriver, push in the (2) locking tabs holding the turn signal housing into the grille. Once unclipped, push the fog light housing through the front of the grille. Repeat procedure to the opposite side of the grille.

**STEP 4**

Install the turn signals into the new grille by pushing the turn signal housing through the front of the grille until the housing clicks into place.

**STEP 5**

Place (6) vampire clips onto the back of the grille. Neatly route the DRL lighting harness to a suitable location and adhere the module.

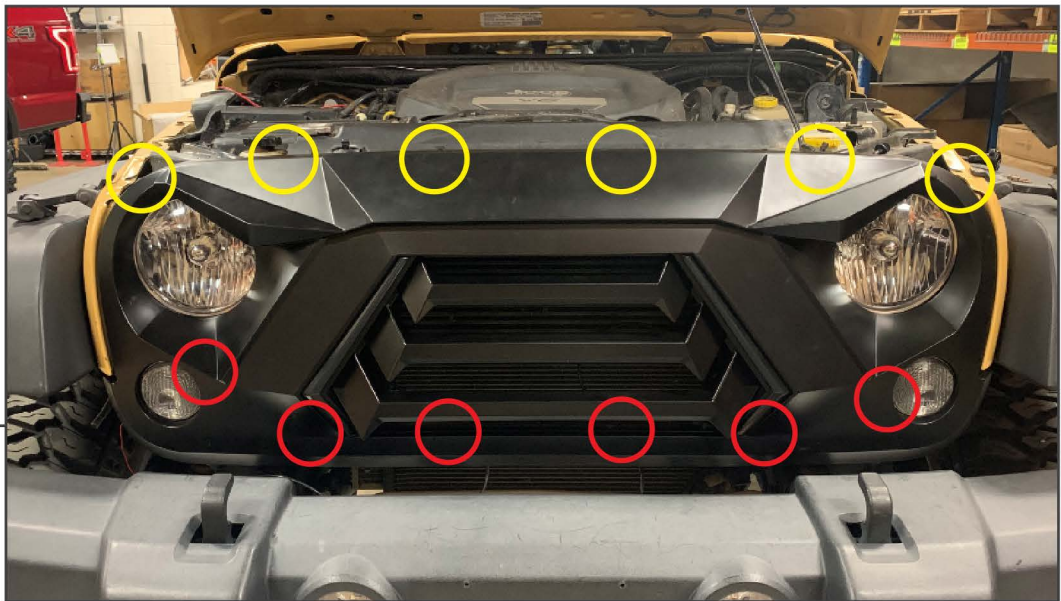**STEP 6**

Install the grille to the vehicle by pressing the lower portion of the grille into the vehicle. Align the top of the grille with the radiator support. Install the provided (6) push clips at the top of the grille to secure the grille into place.

**STEP 7**

Insert the (1) fuse tap into the fuse box at the indicated location [M9]. If fuse spot is currently used, remove the fuse and replace a fuse in the fuse tap prior to installation. Route the fuse tap out of the fuse box and crimp to the grille DRL wiring harness.

**STEP 8**

Clean the upper portion of the grille using isopropyl alcohol and a microfiber cloth. Adhere the weatherstrip to the top of the grille. Close the hood.

Installation is now complete.