



TAIL LIGHT TRIM

(2007-2018 WRANGLER JK)

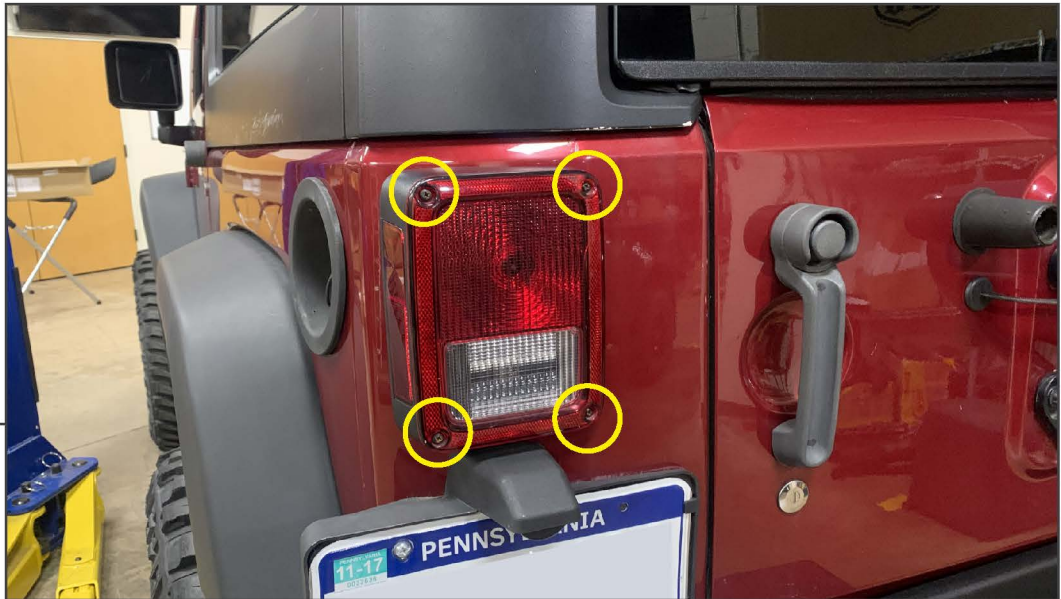
INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light Trim
- (1) RH Tail Light Trim
- (8) Phillips Screws
- (8) Spacers

TOOLS REQUIRED

Phillips Screwdriver

**STEP 1**

Remove (4) Phillips head screws from the tail light assembly.

**STEP 2**

Place (4) spacers in between the trim and the tail light. Secure the trim to the tail light using (4) Phillips screws. Tighten until secure.

Repeat steps 1-2 to the opposite side of the vehicle. Installation is now complete.