



COWL ARMOR

(2007-2018 WRANGLER JK)


INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Cowl Armor
- (1) RH Cowl Armor

TOOLS REQUIRED

- Isopropyl Alcohol
- Microfiber Cloth

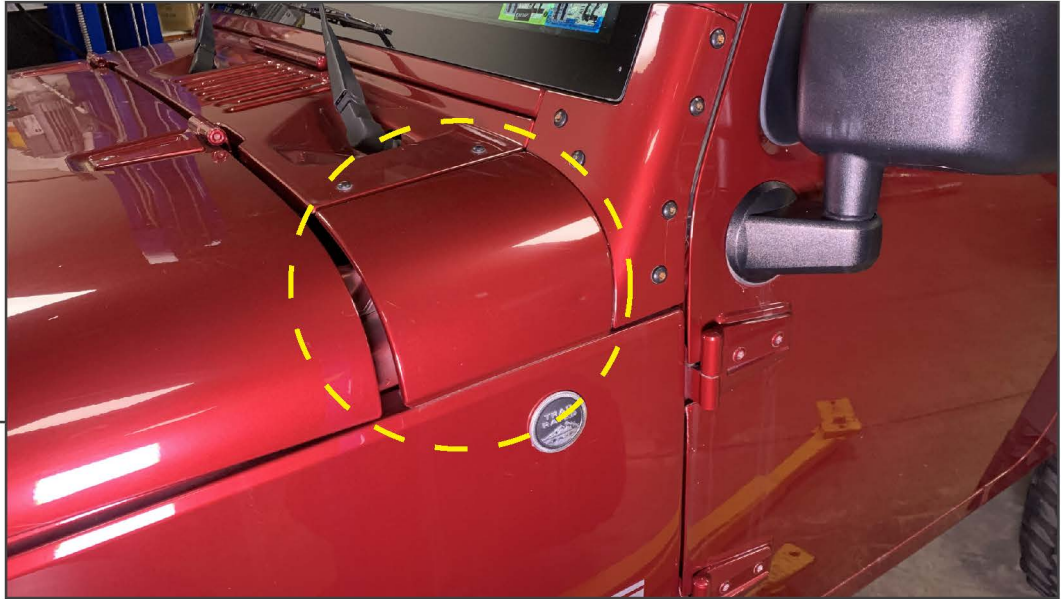

STEP 1

Clean the cowl area of the vehicle using isopropyl alcohol and a microfiber cloth. Ensure the cowl panel is dry after cleaning.



STEP 2

Peel the double sided tape backing from the cowl armor, and firmly press the armor to the vehicle cowl panel.

Repeat steps 1-2 to the opposite side of the vehicle. Installation is now complete.