



FENDER TOP ARMOR

(1997-2006 WRANGLER TJ)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Fender Top Armor
- (1) RH Fender Top Armor
- (2) Black Vinyl Squares
- (2) Alcohol Prep Pads


TOOLS REQUIRED

- 15mm Socket
- Ratchet
- Razor Blade
- Exterior Detailer
- Microfiber Cloth




STEP 1

Unlatch the hood latch. Unbolt the hood latch from the bottom of the fender by removing (1) 15mm nut. Set hood latch aside.

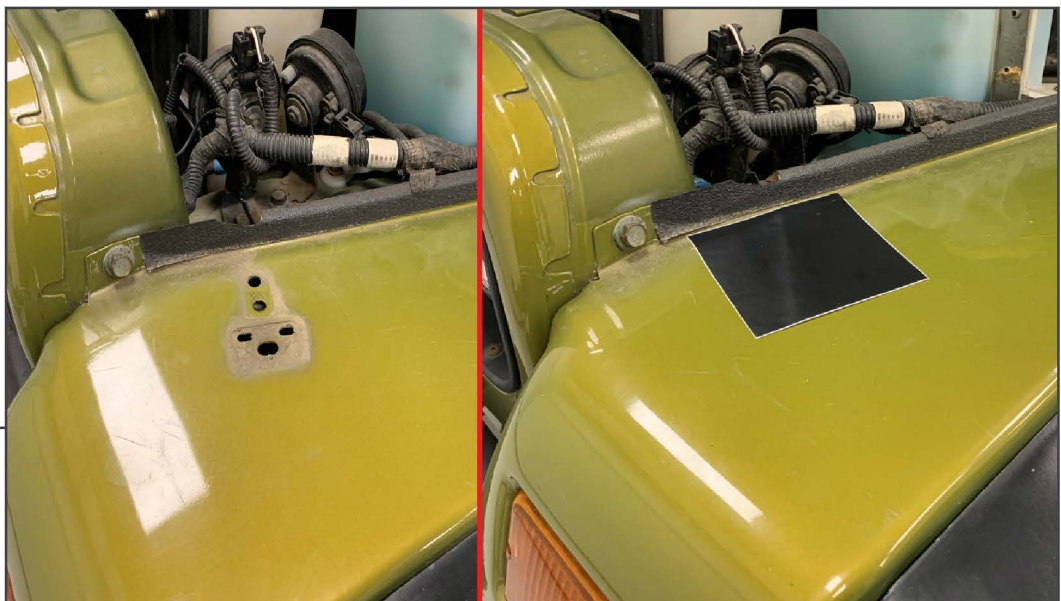

STEP 2

Clean the hood latch area of the fender using exterior detailer and a microfiber cloth. Place (1) black vinyl square over the hood latch holes. Do not adhere the vinyl to the vehicle.

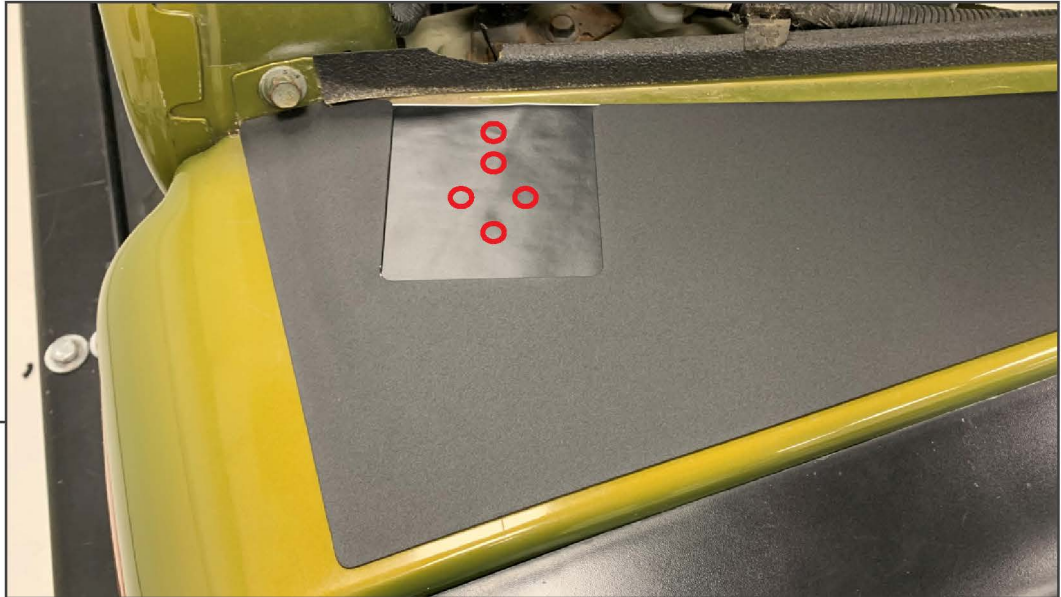**STEP 3**

Place the fender armor over the vinyl square. Adjust the fender top and vinyl square to the desired location, then use a razor blade to cut the hood latch holes in the vinyl square. Once the holes are cut, remove the fender armor and adhere the vinyl square to the fender using the cut holes as alignment guides.

**STEP 4**

Clean the fender top using (1) alcohol prep pad. Peel the double sided tape backing, then adhere the fender top armor to the vehicle.

STEP 5



Install the hood latch to the vehicle reusing the original hardware.

STEP 6



Repeat steps 1-5 to the opposite side of the vehicle.

Installation is now complete.