



TAIL LIGHT TRIM

(2007-2018 WRANGLER JK)

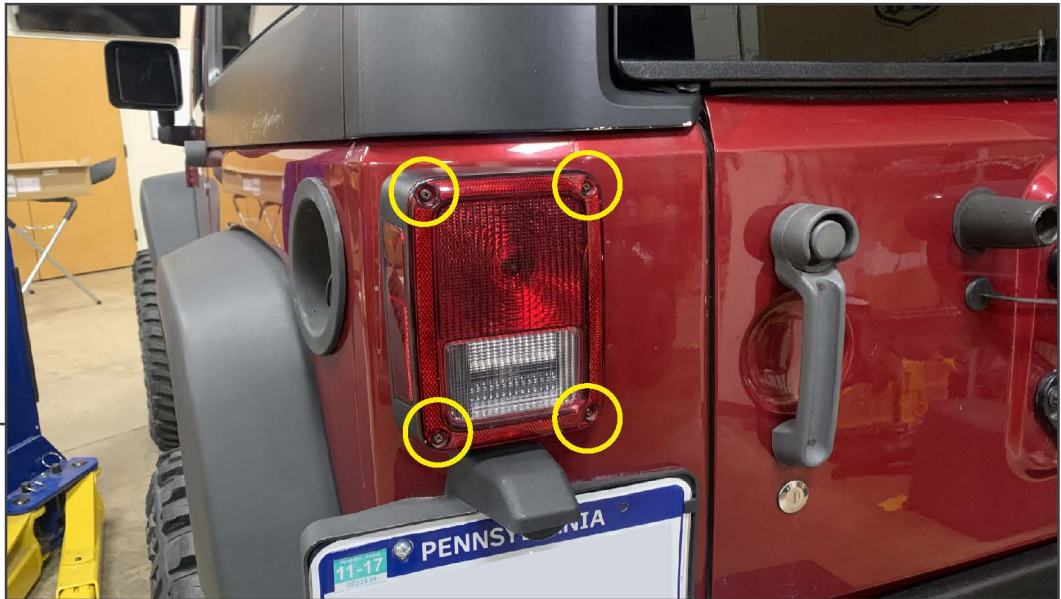
INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light Trim
- (1) RH Tail Light Trim
- (4) Large Phillips Head Screws
- (4) Small Phillips Head Screws
- (8) Spacers

TOOLS REQUIRED

Phillips Screwdriver

**STEP 1**

Remove (4) Phillips head screws from the tail light assembly.

**STEP 2**

Place (4) spacers in between the trim and the tail light. Secure the trim to the tail light using (2) large Phillips screws (outside) and (2) short Phillips screws (inside). Tighten until secure.

Repeat steps 1-2 to the opposite side of the vehicle. Installation is now complete.