



TORCH GRILLE

(2018+ WRANGLER JL)
(2020+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille Assembly
- (1) Upper Mounting Bracket
- (1) Wiring Harness
- (8) M4 Bolts
- (8) M4 Flat Washers
- (8) M4 Flange Nuts
- (8) Vampire Clips

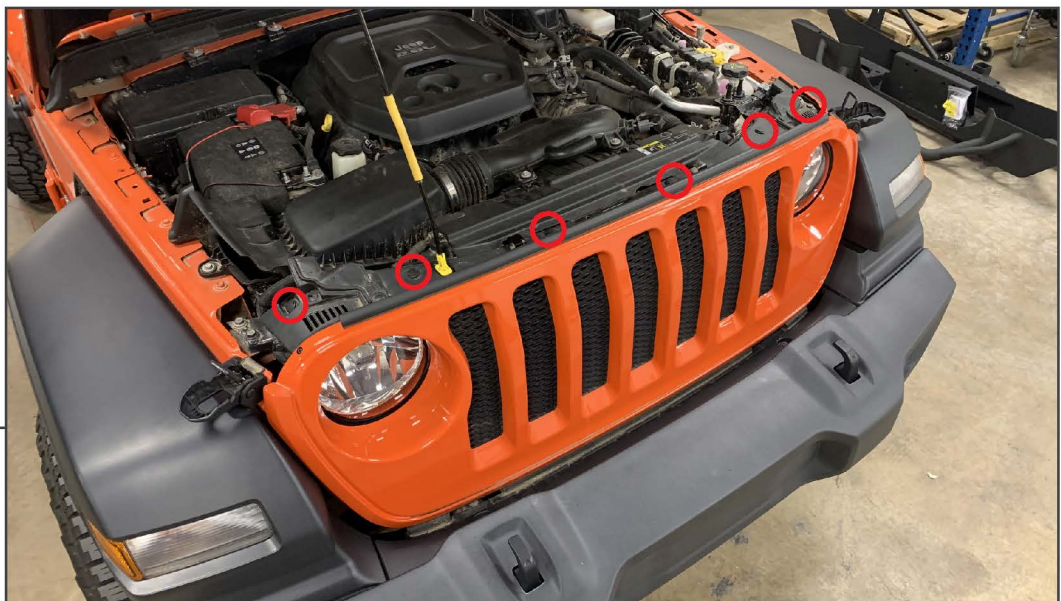
TOOLS REQUIRED

- Panel Removal Tool
- 7mm, 8mm Wrench/Socket
- Ratchet
- Phillips Screwdriver
- Flathead Screwdriver
- Pliers
- Wire Strippers/Cutters
- Wire Connectors

**STEP 1**

Open the vehicle hood. Remove the upper weatherseal from the grille using a panel removal tool.

Note: The upper weatherseal will be reused during re-assembly.

**STEP 2**

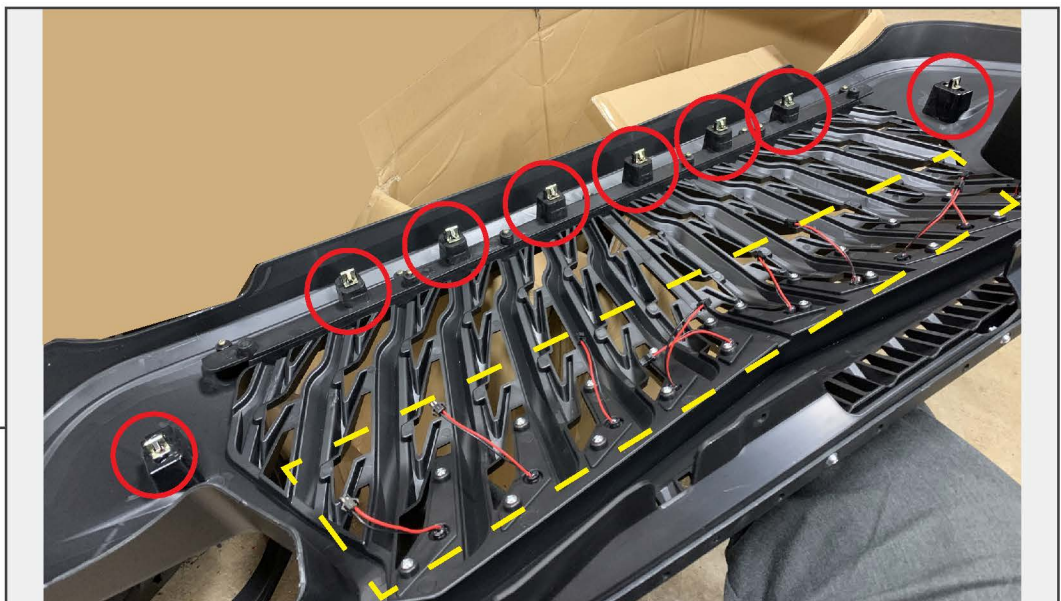
Remove (6) plastic push clips from the upper portion of the grille assembly.

Note: The (6) plastic clips will be reused during re-assembly.

**STEP 3**

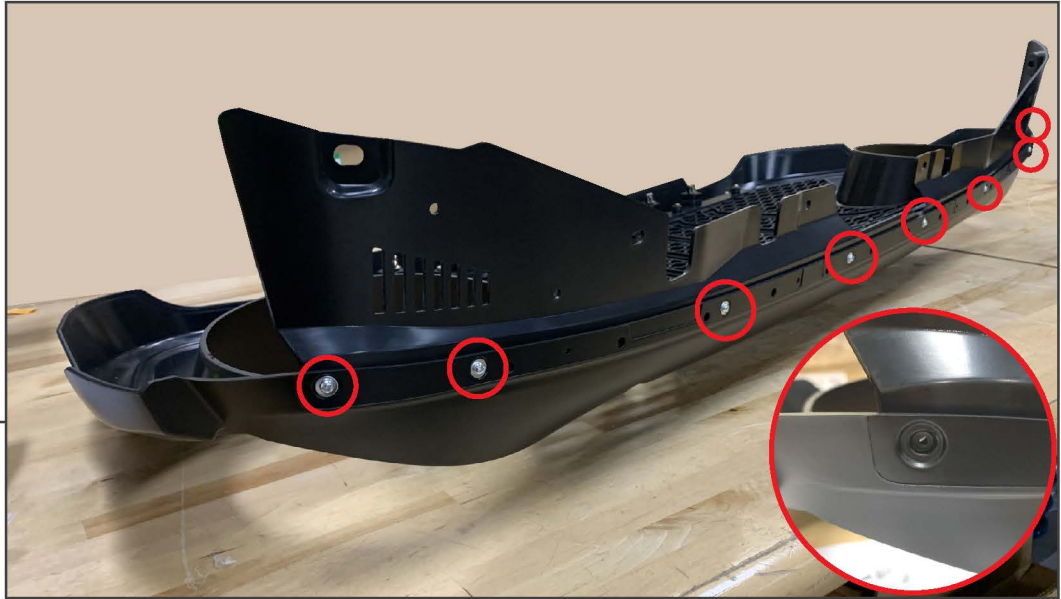
Firmly pull the bottom of the grille away from the vehicle to dislodge the (8) grille vampire clips.

Ensure all of the original vampire clips are removed from the vehicle. Pliers or a flathead screwdriver can be used to remove the vampire clips from the radiator support, if necessary.

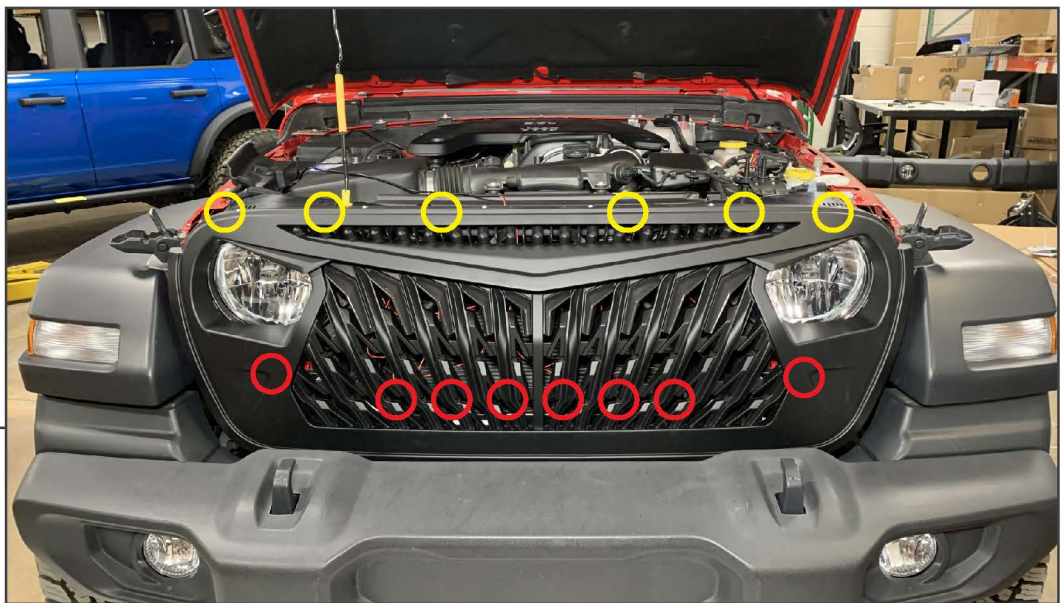
**STEP 4**

Place the grille face down on a soft surface. Install the (8) vampire clips to the bottom of the grille assembly.

Plug the wiring harness into each of the LED lights.

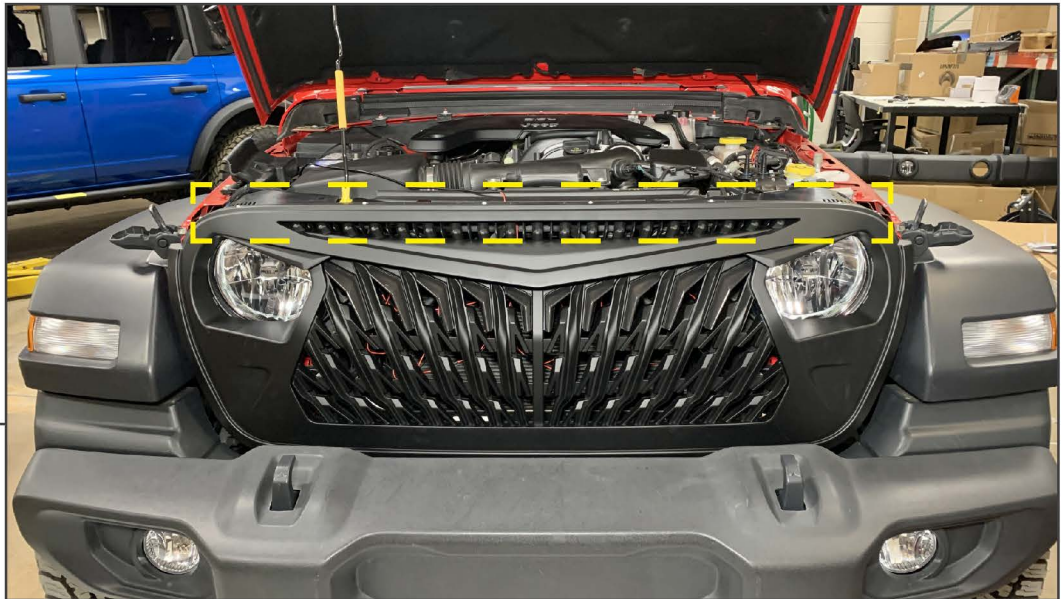
**STEP 5**

Align the upper mounting bracket under the upper grille lip. Secure the mounting bracket to the grille using (8) M4 bolts, (8) M4 flat washers, and (8) M4 flange nuts. Ensure to only install the hardware in the holes with the cutout for the flat washer.

**STEP 6**

Align the grille assembly to the vehicle, and firmly press the lower vampire clips into the vehicle radiator support. Once the lower clips are secure, install the upper mounting bracket to the vehicle using the original (6) plastic push clips.

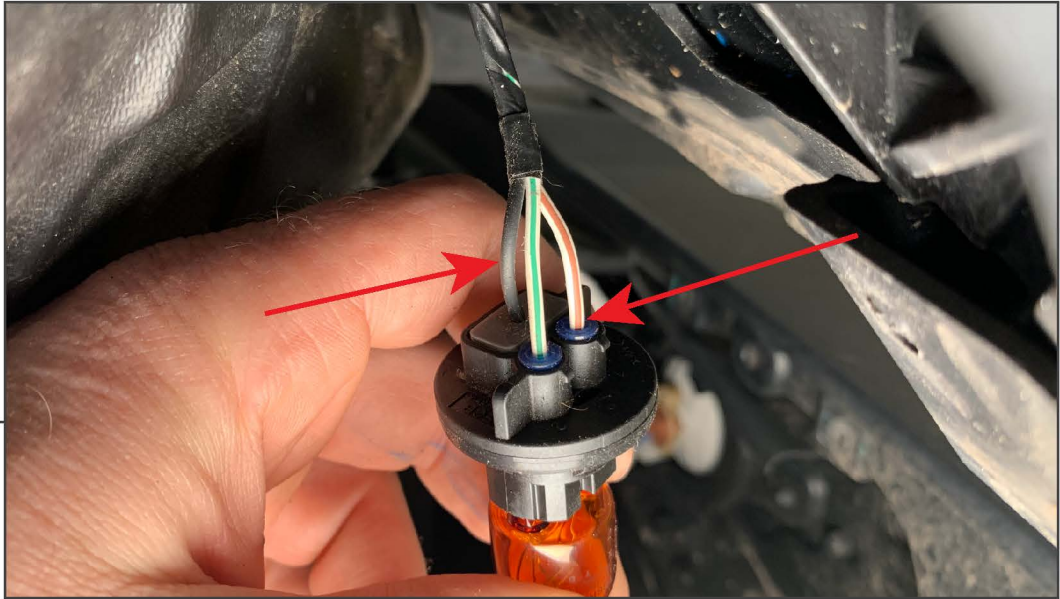
Neatly route the LED wiring harness towards the RH vehicle fender, avoiding any hot/moving components. The wiring will be spliced into the parking light.

**STEP 7**

Install the upper weatherseal to the grille assembly by pressing the clips into the pre-drilled holes along the top of the grille. Secure the grille to the vehicle using the (6) original push clips.

**STEP 8**

Remove the (2) 8mm bolts and (1) plastic push clip to gain access to the fender mounted running light.

**STEP 9**

Locate the parking light connector. Splice the grille lighting wiring harness into the parking light following the diagram below. Once wired, re-assemble the fender liner.

<u>Vehicle Parking Light Harness</u>	-	<u>Grille Lighting Harness</u>
White/Orange (+)	-	Red (+)
Black (+)	-	Black (-)

**STEP 10**

Installation is now complete.