



---

# HD ALUMINUM TAIL LIGHT GUARDS

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---


- (2) Tail Light Guards
- (4) #8 x 50mm Phillips Screws
- (4) #10 x 50mm Phillips Screws
- (8) Plastic Spacers

### TOOLS REQUIRED

---

Phillips Screwdriver

SKU # J171699

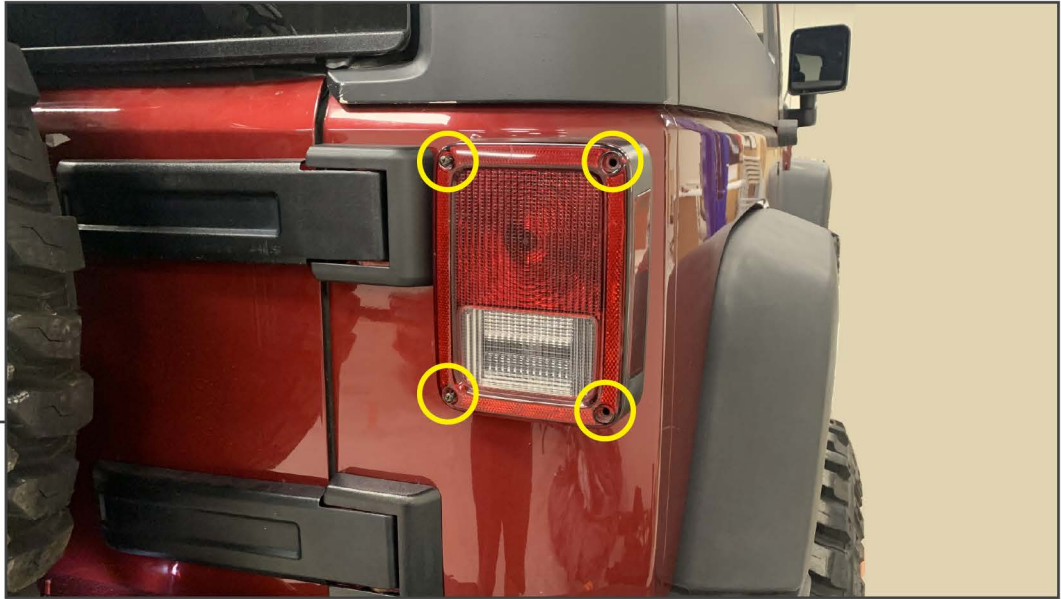


**STEP 1**

Remove (4) screws from the tail light assembly using a Phillips head screwdriver.



**STEP 2**

Loosen the (2) Phillips screws on the rear of the tail light guard. Align the tail light guard to the vehicle, and adjust the cross bar to the desired height. Once adjusted, tighten the (2) screws to lock the crossbar into place.

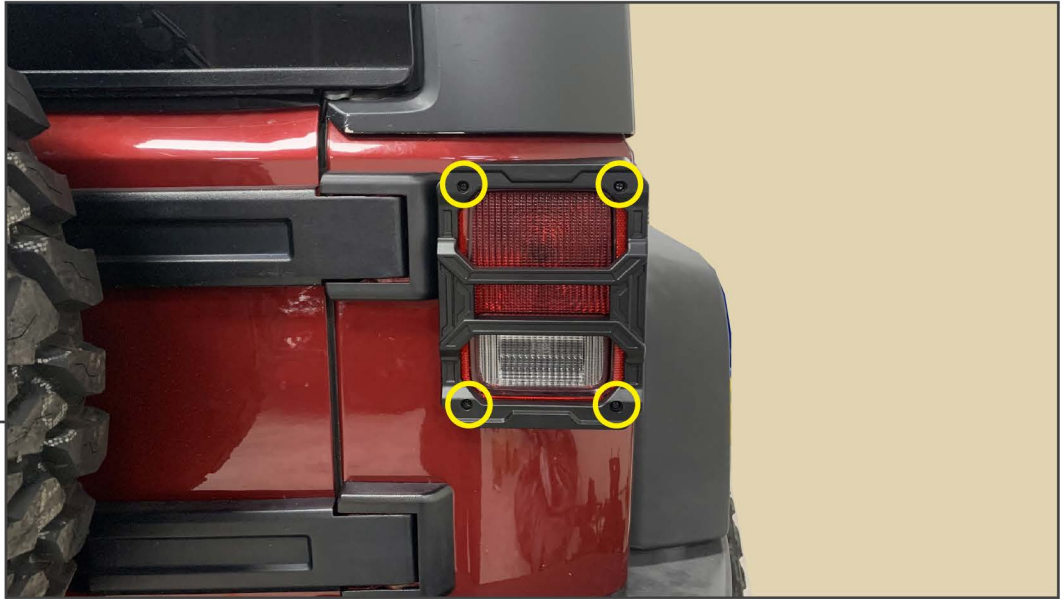**STEP 3**

Secure the tail light guard to the vehicle tail light using (4) plastic spacers, (2) #8 x 50mm screws, and (2) #10 x 50mm screws. Ensure the spacers are in between the tail light assembly and the tail light guard.

**STEP 4**

Repeat steps 1-3 to the opposite side of the vehicle.

Installation is now complete.