



# HOOD LOCK KIT

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (2) Hood Locks
- (2) Hood Catches
- (4) Keys
- (4) Rubber Isolators
- (4) M8x1.25x20mm Allen Bolts
- (4) M8 Flat Washers
- (4) M8 Lock Nuts
- (2) M10 Lock Nuts

### TOOLS REQUIRED

---

- 10mm, 13mm Sockets
- Ratchet
- Allen Wrench


SKU # J172767

## STEP 1




Begin by propping the hood open by unlatching the vehicle hood latch. Locate, and remove the 13mm nut that holds the hood strap to the fender.

## STEP 2

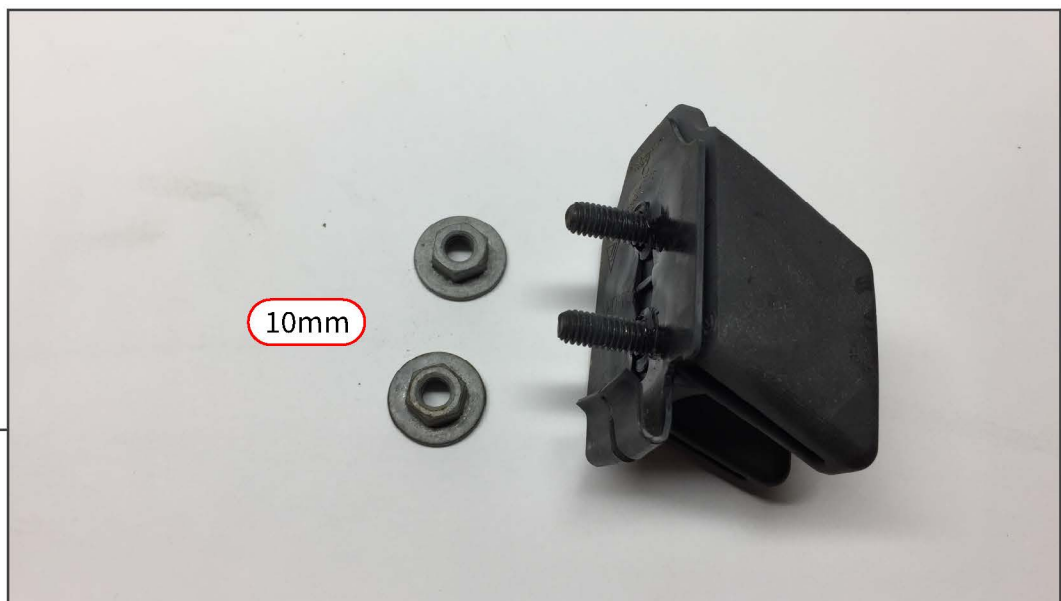

Locate, and remove the (2) 10mm nuts that hold the hood latch to the hood, remove the latch from the vehicle.

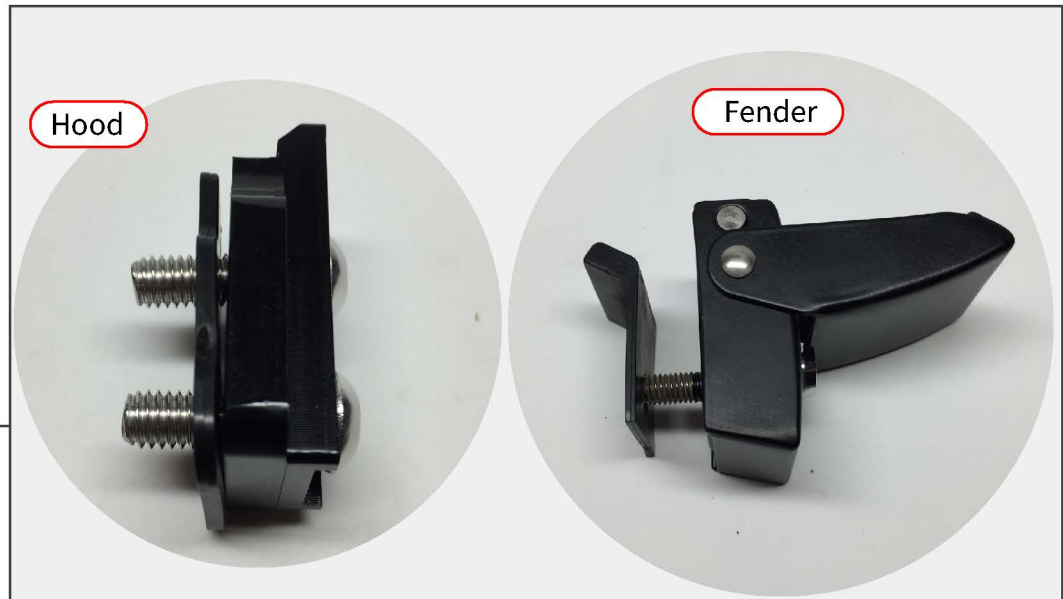

## STEP 3

Install the locking latch to the fender using the supplied 13mm lock nut. Install the rubber isolator between the latch and fender. Install the hood latch using the supplied 10mm nuts. Install the rubber isolator between the latch and the hood.



## STEP 4

Repeat steps 1-3 to the opposite side of the vehicle.

Installation is now complete.