



TRIDENT LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS


(1) LH Tail Light
(1) RH Tail Light

TOOLS REQUIRED

Phillips Screwdriver
Exterior Detailer
Microfiber Cloth


SKU: J173718 , J173719

STEP 1

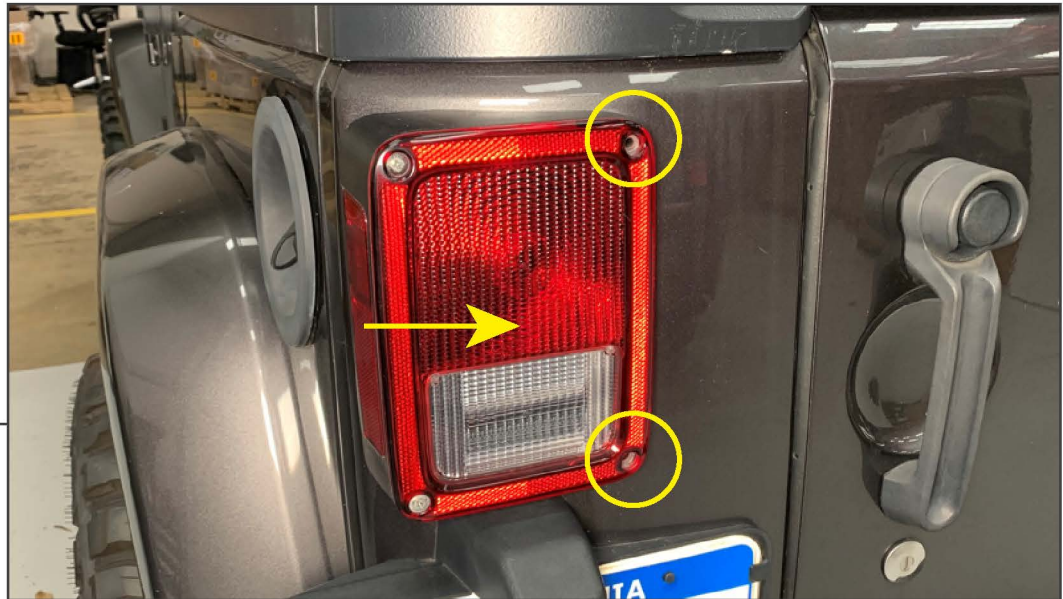

Remove the (2) inner Phillips head screws from the tail light assembly. Push the tail light towards the middle of the vehicle to dislodge the inner clips.

STEP 2

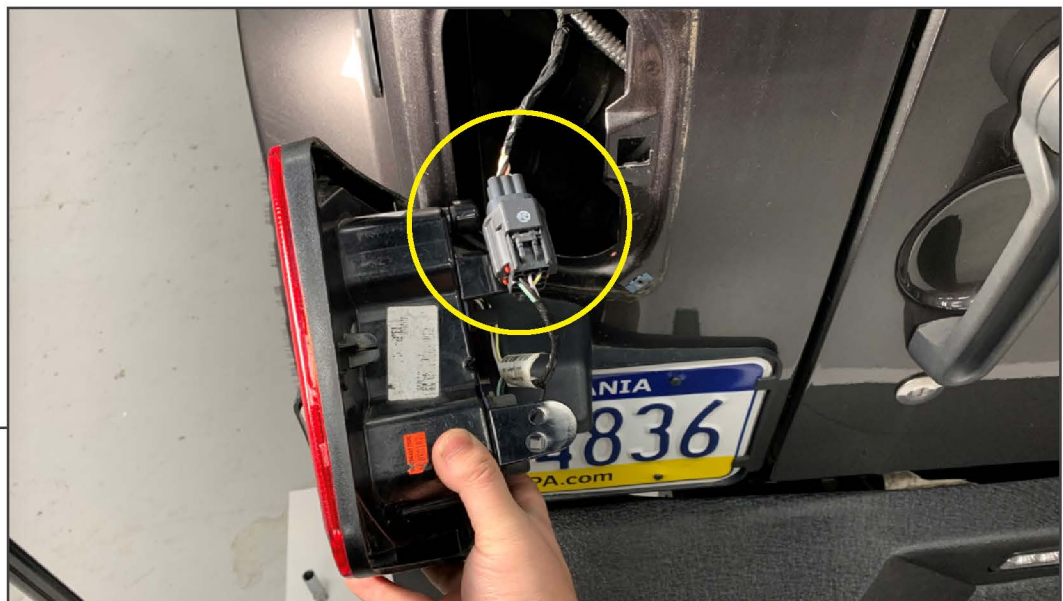

Unplug the (1) electrical connector from the tail light by pressing the plastic tab while separating the harnesses.

STEP 3



Clean the tail light mounting area of the vehicle using exterior detailer and a microfiber cloth.

STEP 4



Install the tail light to the vehicle reusing the (2) original Phillips head screws.

Repeat steps 1-6 to the opposite side of the vehicle. Installation is now complete.