



7” LED HEADLIGHTS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Pair of LED Headlights
- (2) Headlight Adapters
- (2) Wire Extensions
- (2) Scotchlok Connectors


TOOLS REQUIRED

- Panel Removal Tool
- T-15 Torx Screwdriver
- Test Light/Multi Meter
- Wire Strippers/Crimpers



STEP 1

Open the hood. Remove (6) plastic push clips using a panel removal tool.

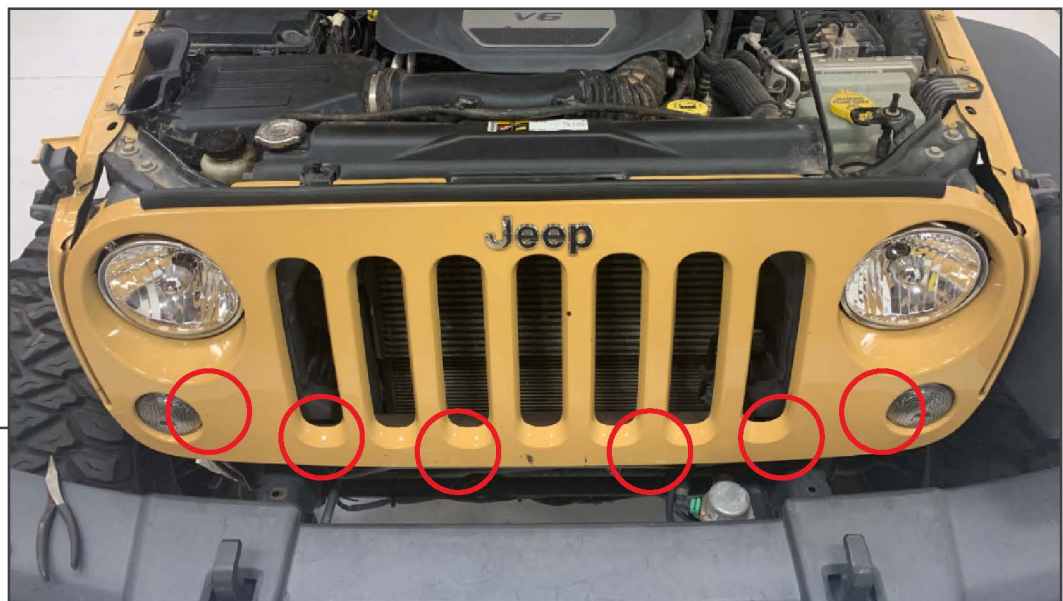

STEP 2

Firmly pull the lower portion of the grille away from the vehicle to dislodge the lower clips from the grille. Unplug the turn signal harnesses from the turn signal housings.



STEP 3

Remove (4) T-15 Torx screws from the headlight assembly. Unplug the connector from the light by sliding back the red slider, then pushing down the plastic tab. Remove the light from the vehicle.



STEP 4

Connect the headlight harness to the vehicle harness using the included adapter harness. Install the new headlight into the vehicle re-using the original trim ring and hardware. Wire the DRL to the vehicle following the diagram below. Installation is now complete.

<u>Headlight Leads</u>	-	<u>Vehicle Harness</u>
Red	-	Parking Lamp (+)
		(LH Side = White/Green RH Side = White/Tan)