

ADVENTURE HD FRONT BUMPER WITH JEEP LOGO

(1987-1995 WRANGLER YJ) (1997-2006 WRANGLER TJ)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Front Bumper
- (2) 3/4" D-Rings
- (6) M12 Bolts
- (6) M12 Lock Washers
- (6) M12 Flat Washers
- (2) YJ Upper Mounting Brackets
- (2) YJ Lower Mounting Brackets

TOOLS REQUIRED

T-55 Torx Socket 10mm, 19mm Socket/Wrench Ratchet





STEP 1

Remove the (4) T-55 Torx bolts located on top of the bumper.



STEP 2


From under the vehicle, remove the (2) lower T-55 Torx bolts. Remove the front bumper from the vehicle.





STEP 3

Remove the (2) 10mm bolts that hold the sway bar cover. Remove the cover.

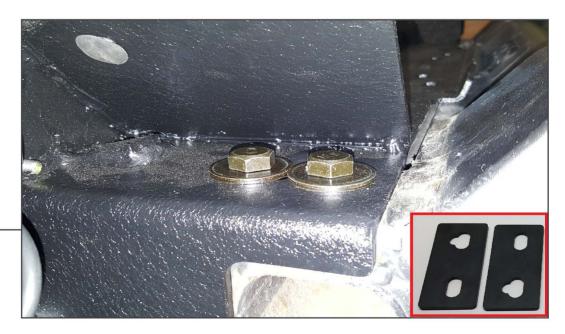

STEP 4

Fit the bumper to the vehicle frame rails, and secure into place using (2) M12 bolts, (2) M12 lock washers, and (2) M12 flat washers per side.

If installing on a 1987-1995 YJ, install the upper bumper brackets.

Jeep



STEP 5

Secure into bottom of the bumper into place using (1) M12 bolts, (1) M12 lock washers, and (1) M12 flat washers per side.

If installing on a 1987-1995 YJ, install the lower bumper mounting brackets.



STEP 6

Ensure all bumper bolts are tight and secure. Install (2) 3/4" D-Rings onto the bumper.

Installation is now complete.