

REDROCK

BIKINI TOP

(1997-2006 WRANGLER TJ)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) Bikini Top

TOOLS REQUIRED

13mm Wrench

SKU # J181076



STEP 1

Remove the vehicle top from the vehicle. Installation of the REDROCK header panel is required for installation (SKU # J181078).

Loosen the (2) 13mm bolts from the header, and fit the hooks into the vehicle windshield top mount. Once fitted, push toward on the header and tighten the (2) bolts evenly until the header is secure.



STEP 2

Drape the bikini top into the vehicle, and loosely secure the (4) rear roll bar straps. The straps must be routed in between the vehicle roll bar and the sound bar.

Note: Loosening the sound bar may be required to fit the straps.



STEP 3


Fit the front of the top to the previously installed header panel. The plastic strip will fit into the header panel groove.



STEP 4

Route the center strap in between the roll bar and the sound bar. Wrap the strap around the vehicle windshield loop, and loosely secure the strap together. Tie the excess strap away from view.

STEP 5

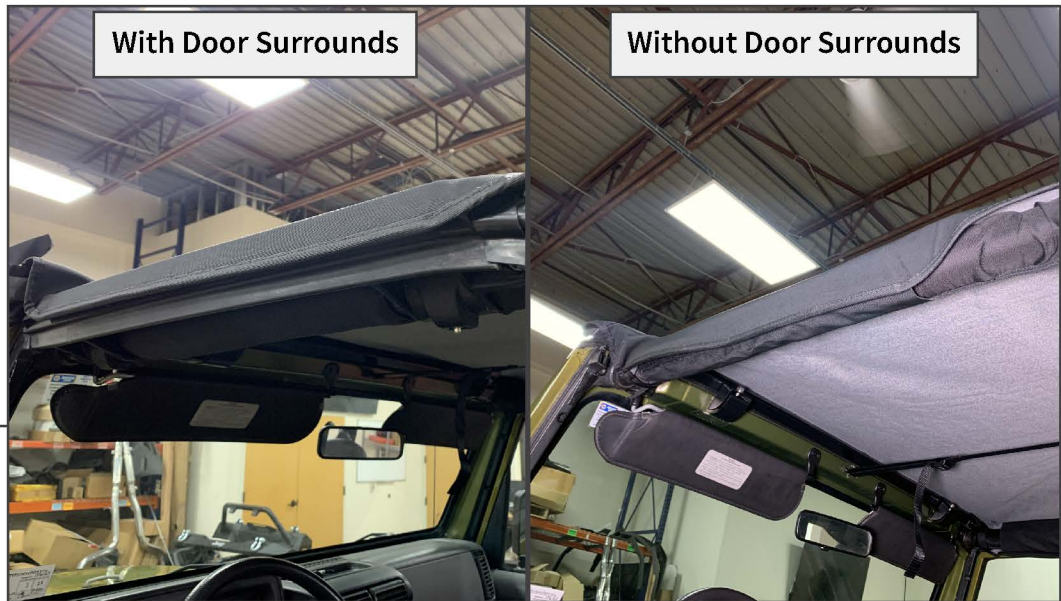

Securing the sides varies for vehicles with and without door surrounds.

With Door Surrounds: Locate the plastic strip along the edge of the top. Fold the plastic strip into the door surround channel.

Without Door Surrounds: Wrap the inner top material with Velcro around the vehicle roll bar, and secure the Velcro together.

STEP 6



Secure the front corner Velcro straps together around the front of the roll bar.

Installation is now complete.