

# LED TAIL LIGHTS

(2018-2023+ WRANGLER JL - WITH OEM HALOGEN  
TAIL LIGHTS)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (2) Tail Lights
- (2) Resistor Brackets
- (4) Mounting Clips
- (2) Vampire Clips
- (4) Machine Screws
- (4) Lock Nuts

### TOOLS REQUIRED

---

- Soft Pry Tool
- 10mm Socket
- Phillips Head Screw Driver
- Pliers



**STEP 1**

Begin by opening the tailgate to access tail light trim cover. Using a soft pry tool, remove the cover from the vehicle.



**STEP 2**

Using a 10mm socket, loosen the plastic tail light retaining screw.

**STEP 3**




Pull the tail light away from the vehicle to access the wiring connection.

**STEP 4**




Slide back the plug's red locking tab. Then depress the connector tab and pull the plugs apart. Remove the factory tail light from the vehicle.

**STEP 5**

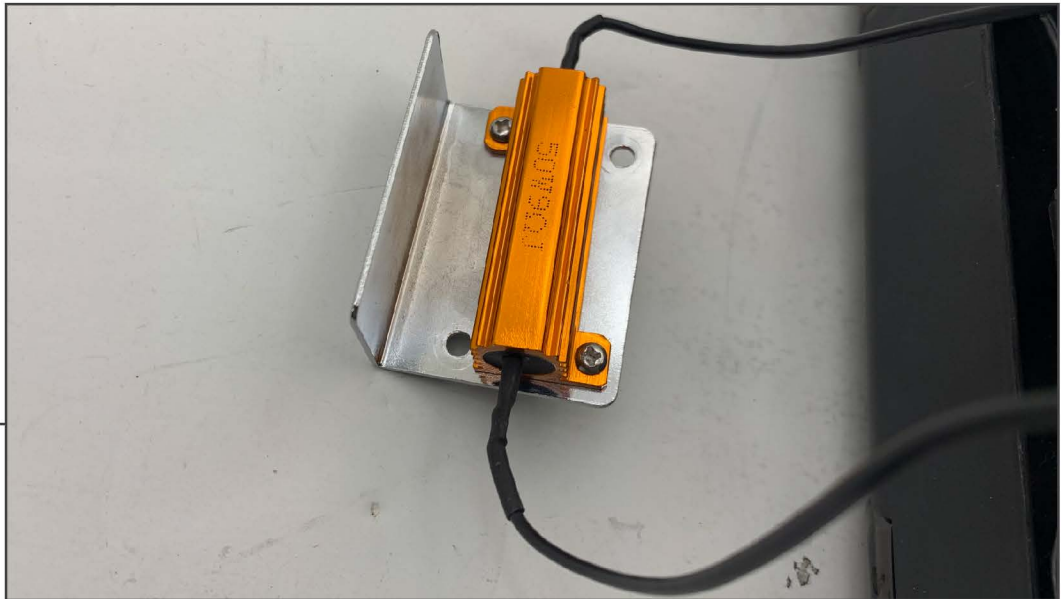


Using a Phillips head screwdriver and a pair of pliers, install the resistors to the resistor mounting bracket. Each resistor will require (2) machine screws and (2) lock nuts.

**STEP 6**

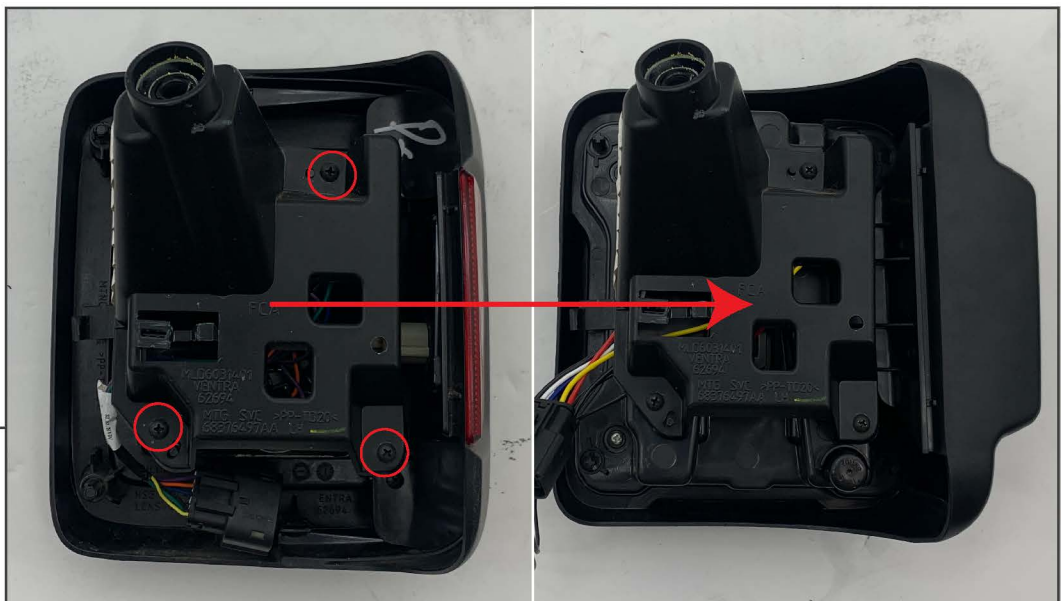

Using a Phillips head screwdriver remove the (3) screws and (1) clip, transfer them factory tail light bracket to the LED light. Repeat this process for both tail lights.

**STEP 7**

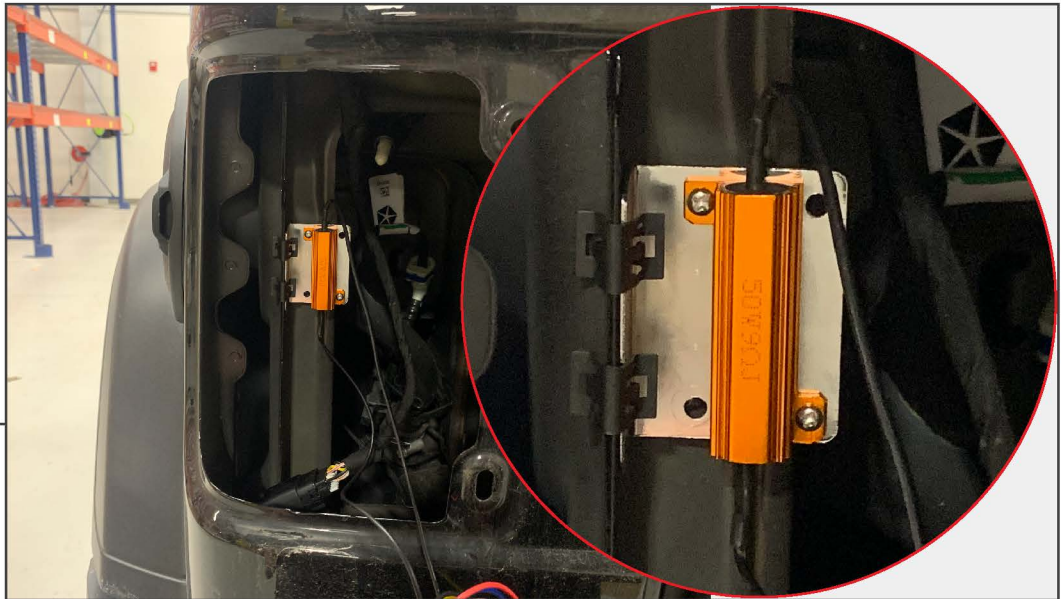

Using the provided clips, install the resistor and bracket onto the pinch weld behind the tail light.  
\*\*Note: If the clips aren't tight enough, use a pair of pliers to squeeze the clip together. This will decrease the gap in the clip and will make the clip tighter for installation.

**STEP 8**



Re-install the new LED tail lights following Steps 1-4 in reverse order.

Installation is now complete.