

JL STYLE LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS


- (1) LH Tail Light
- (1) LH Tail Light Bracket
- (1) RH Tail Light
- (1) RH Tail Light Bracket
- (4) Small Phillips Screws
- (2) Resistor Brackets
- (4) M4 Bolts
- (4) M4 Lock Nuts
- (4) 'S' Clips

TOOLS REQUIRED

- Phillips Screwdriver
- Pliers
- Isopropyl Alcohol
- Microfiber Cloth


SKU: J183257

STEP 1

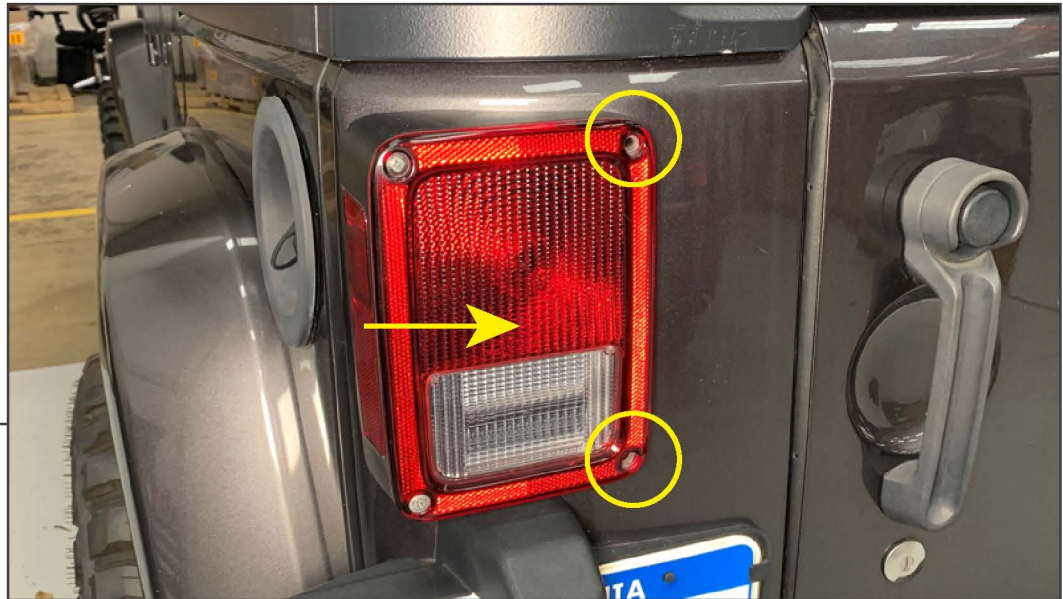

Remove the (2) inner Phillips head screws from the tail light assembly. Push the tail light towards the middle of the vehicle to dislodge the inner clips.

STEP 2

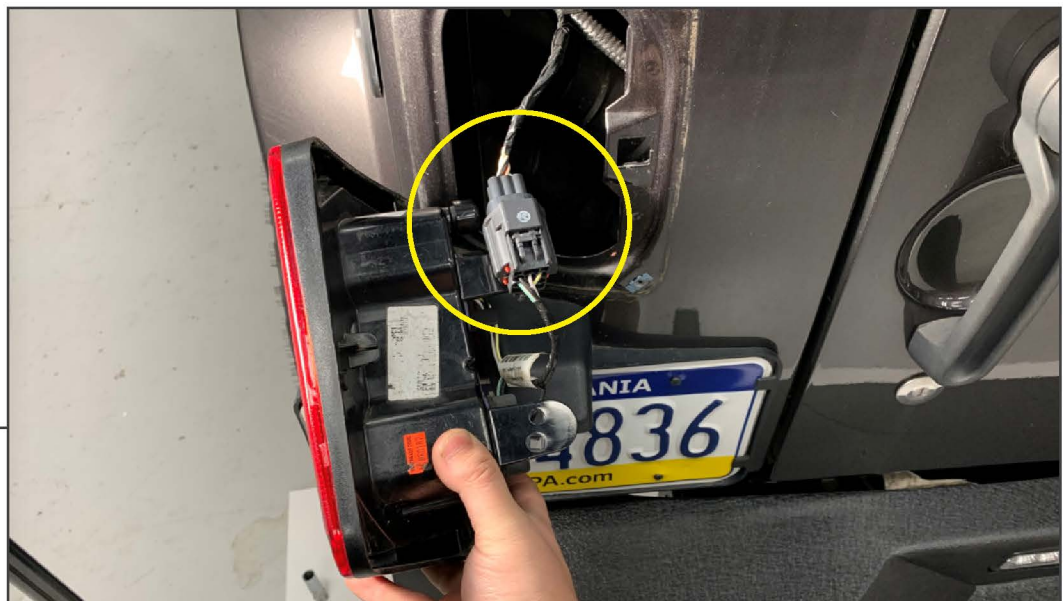

Unplug the (1) electrical connector from the tail light by pressing the plastic tab while separating the harnesses.

STEP 3




Clean the tail light mounting area of the vehicle using isopropyl alcohol and a microfiber cloth. Allow the vehicle to fully dry.

STEP 4



Remove the tape backing from the 3M tape attached to the tail light bracket.

STEP 5

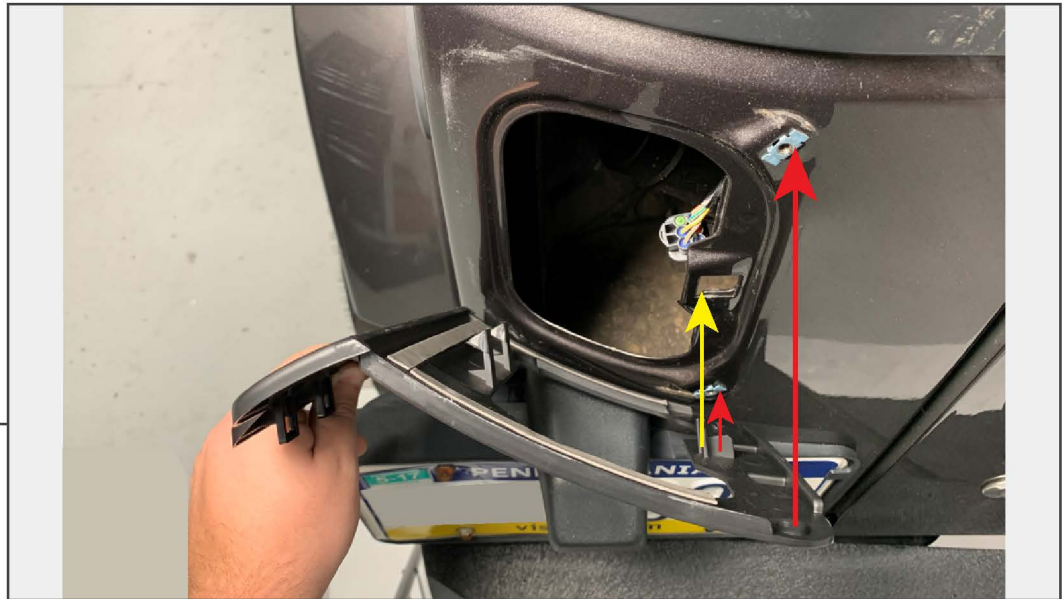

Align the alignment tab in the tail light bracket to the vehicle, then push the panel inwards to lock the outer tabs into place. Ensure the (2) bolt holes remain aligned with the vehicle. Once properly aligned, press the tail light bracket into the vehicle to adhere the tape to the vehicle body panel.

STEP 6



Secure the tail light bracket to the vehicle using the (2) original Phillips head tail light screws.

STEP 7



Align the tail light to the tail light bracket on the vehicle. Plug the tail light into the vehicle harness. Secure the resistor secured to the resistor bracket to the vehicle metal behind the tail light area using the (2) 'S' clips. Secure the tail light into place using (2) small Phillips screws.

STEP 8



Repeat steps 1-7 to the opposite side of the vehicle.

Installation is now complete.