



HAWK GRILLE WITH LED LIGHTING

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille Assembly
- (1) Wiring Harness
- (2) Scotchlok Connectors
- (1) Fuse Tap
- (1) Ring Terminal Connector
- (6) Metal Retaining Clips
- (6) Plastic Push Clips
- (1) Rubber Weather Seal


TOOLS REQUIRED

- Panel Removal Tool
- Flathead Screwdriver



STEP 1


Open the vehicle hood. Remove (6) plastic push clips from the top of the grille assembly.

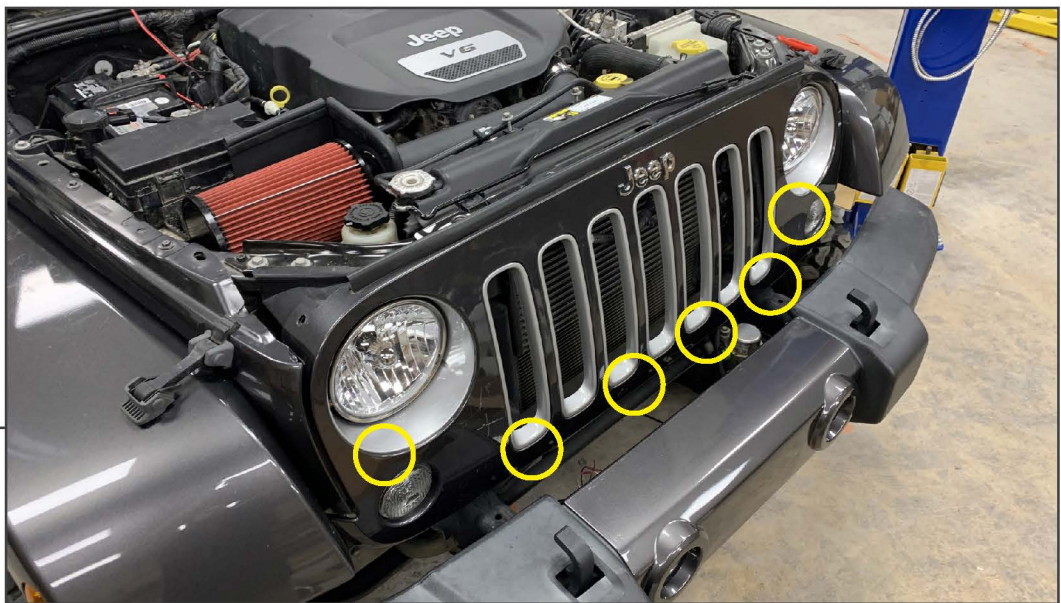

STEP 2

Firmly pull the grille away from the vehicle to dislodge the (6) metal retaining clips. **NOTE:** The turn signals are still connected, only pull away enough to dislodge the clips.


STEP 3

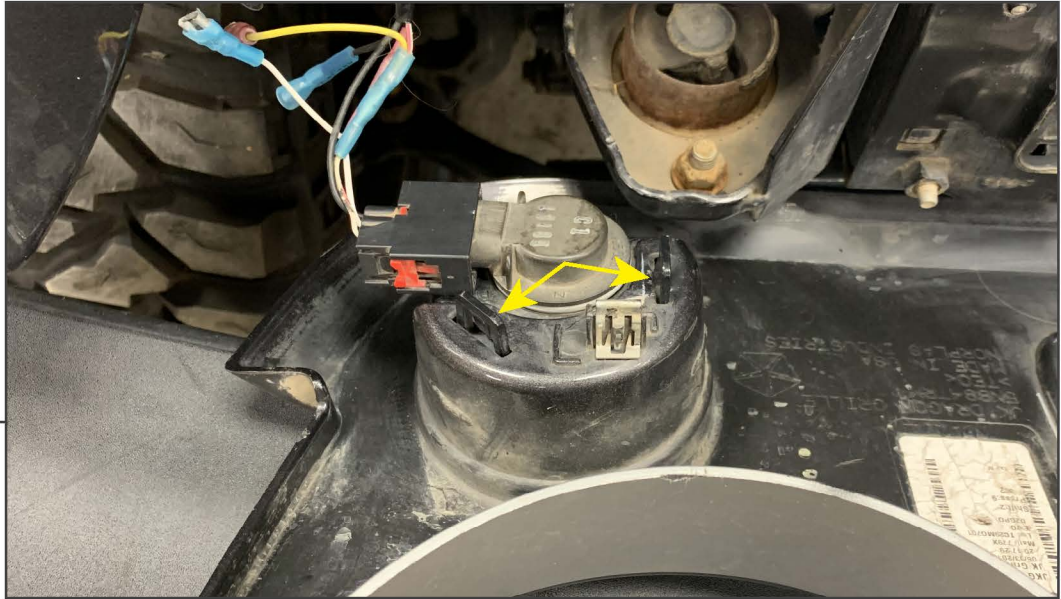


Turn the turn signal light socket to remove the light socket from each light housing. With the light socket removed, press the (2) light housing retaining tabs to remove the light housing through the front of the grille.

Transfer the light housings to the new grille, gently bend the light housing tabs to lock the housing into place if necessary.

STEP 4

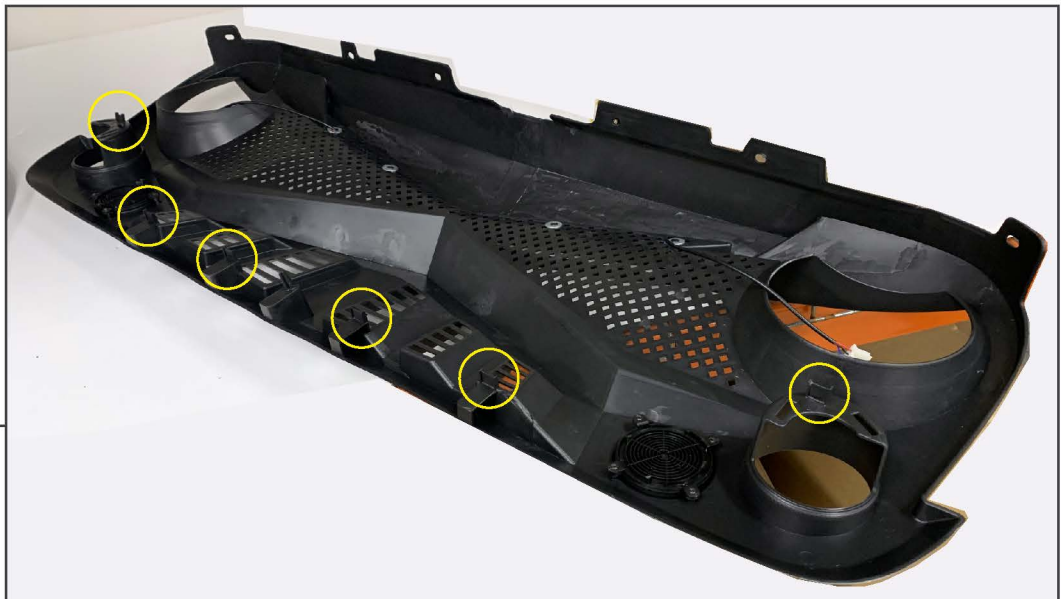

Install the (6) metal retaining clips to the vehicle grille.

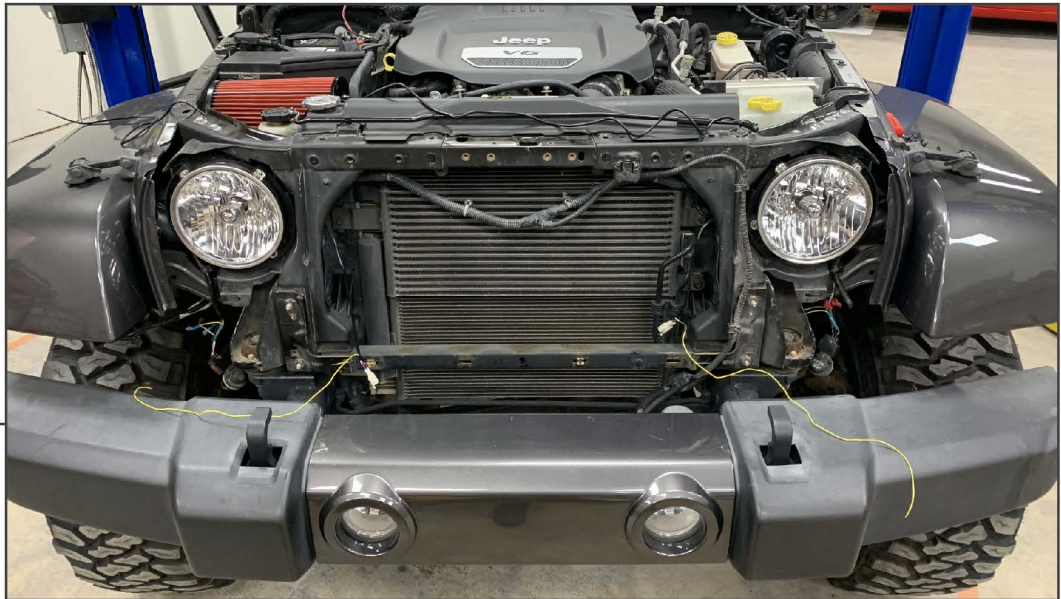

STEP 5

Route the included wiring harness connectors towards the vehicle grille area. Route the yellow wire leads towards the vehicle turn signal connectors. Route the Red/Black wire leads towards the vehicle fuse box & battery.



STEP 6


With the harness routed, place the new grille close to the vehicle mounting location, and plug the LED lights into the harness. Wire the Yellow wire leads into the vehicle turn signal harnesses using the following diagram.

<u>Grille Harness</u>	-	<u>Vehicle Turn Signal Harness</u>
Yellow [Turn Signal +]	-	White/Gray [LH] / White/Pink [RH]



STEP 7

Fit the fuse tap to the RED wire harness lead, and fit into the vehicle fuse box at the indicated fuse [M9]. Neatly route the harness outwards, and then attach the ring terminal connector to the BLACK wire lead. Connect the ring terminal to the vehicle battery negative terminal.

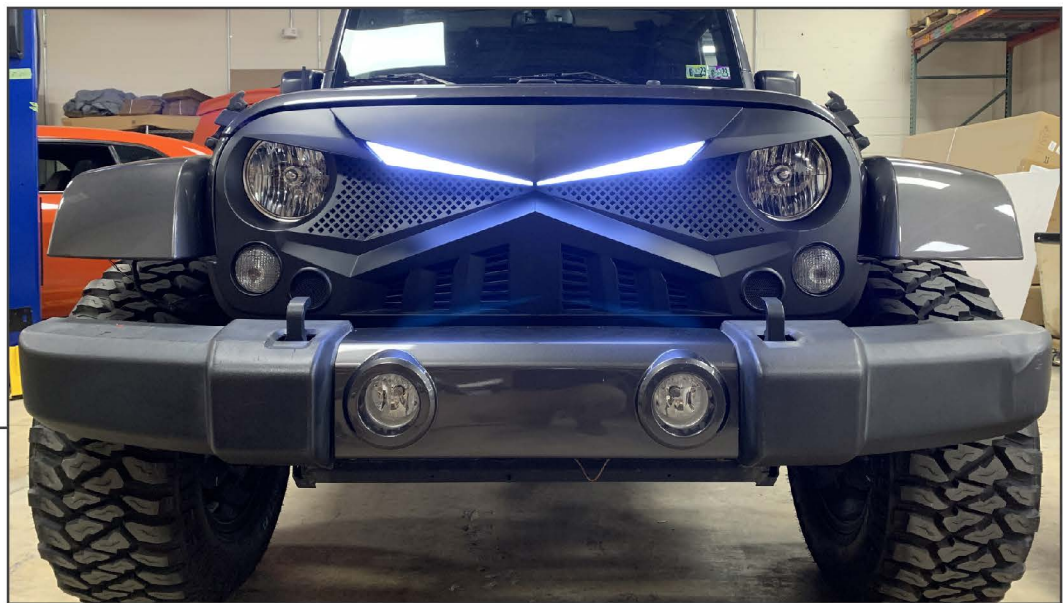

STEP 8

Press the grille to the vehicle, ensuring to engage all (6) lower metal retaining clips. Then, secure the top of the grille using the (6) plastic push clips. Using the attached double sided tape, adhere the weather seal to the top of the grille centered with the vehicle.

Installation is now complete.