

Input Voltage	Bar Length	RGB LED Max Power	White LED Max Power
12V DC	14" / 20" / 32" / 50"	24W / 36W / 60W / 96W	36W / 54W / 90W / 144W

Warranty and Disclaimer

Within THREE years after the purchase date, the original buyer may return any XKchrome controller that has failed due to a defect in materials or workmanship. XKchrome Light Bars that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a THREE year warranty for **the original buyer**.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.


We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Instructions

- Test light bar before mounting:** To test the XKchrome Light Bar, connect the RED wire to the POSITIVE terminal of your 12V DC battery. Connect the BLACK wire to the NEGATIVE pole. The lights should power on. You can test controller functionality by pressing the two buttons on the controller on the rear of the light bar. If the lights show any defects, please contact us and we will be happy to replace them for you.

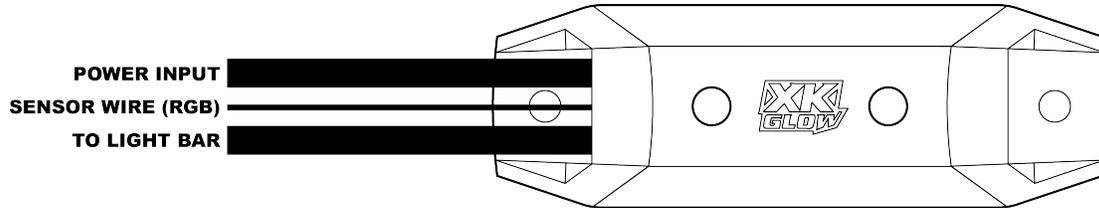


- Install Light Bar:** Loosely attach the included L brackets to the light bar. Find a suitable location for light bar, mark and drill holes, and securely mount the light bar. After the L brackets are secured to the vehicle, tilt the light bar to the desired angle and tighten down the L brackets to the light bar.
- Wire Light Bar:** For recommended wiring, see diagram below. Connect the BLACK wire to your vehicle's ground. This can be direct to the NEGATIVE terminal on the battery or a chassis ground. Connect the RED wire to the POSITIVE terminal of your battery with a switch and 25A inline fuse installed (not included). Mount your switch in the desired location with one end connecting direct to the light bar and the other end of the switch to the battery. Connect 25A inline fuse between switch and battery. To ensure the install can handle max power, use **minimum** 12-gauge wire and a switch capable of your light bar's **COMBINED** power rating (RGB + WHITE) seen at the top of Page 1. *Optional:* To utilize the Sensor Wire functionality, tap the small red wire from the Controller into the desired 12V source. By default, this changes the RGB LEDs to RED when the sensor wire gets a 12V signal. This action can be changed/defined in the App.

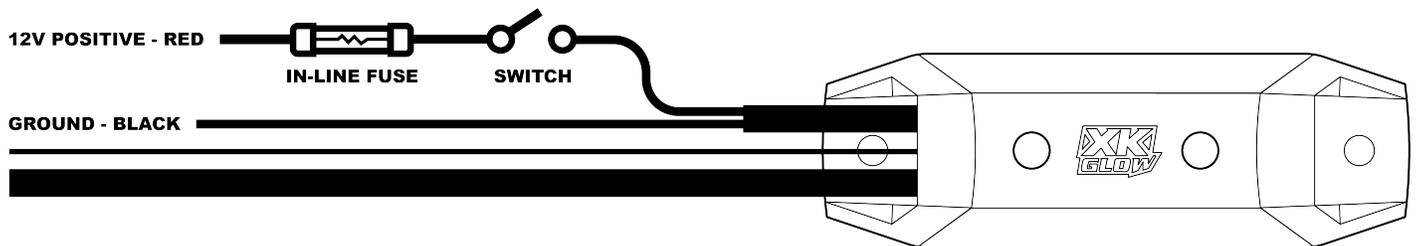

Controlling Light Bar

Included with your RGBW Light Bar is a 2in1 XKchrome Controller. This Controller has both an RGB Controller and a White Controller integrated into one. Power on the light bar and download the **XKchrome App**. **You must pair to BOTH controllers separately as they each have their own Bluetooth signal.** These will show up in the XKchrome App as *separate* controllers and as such, are controlled independently. If you would like to utilize the pure white mode, you must switch off the RGB controller in the App and vice versa. If you do not have your phone handy, you can utilize the buttons on the controller. The button nearest the wiring controls the white and the button furthest from the wiring controls the RGB (see below). Press and hold one mode to turn it off. Press the other to activate it and press again to cycle through presets programmed onto the controller.

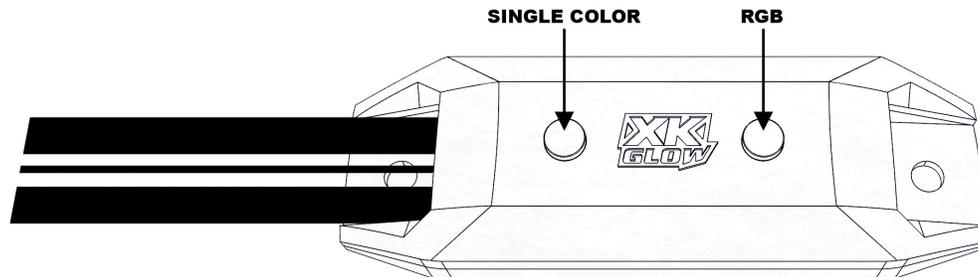

Please note: There are multiple XKGLOW apps on the App Store. Only the XKchrome App will work with the XKchrome Bluetooth Controller. The App icon is pictured here.