

9” LED HEADLIGHTS

(2018-2024+ WRANGLER JL)

(2020-2024+ GLADIATOR JT)


INSTALLATION INSTRUCTIONS

CONTENTS

(2) Headlights
(4) Wiring Lead Extensions
(4) Scotchlok Connectors

TOOLS REQUIRED

Panel Removal Tool
10mm Sockets
Ratchet
Pliers

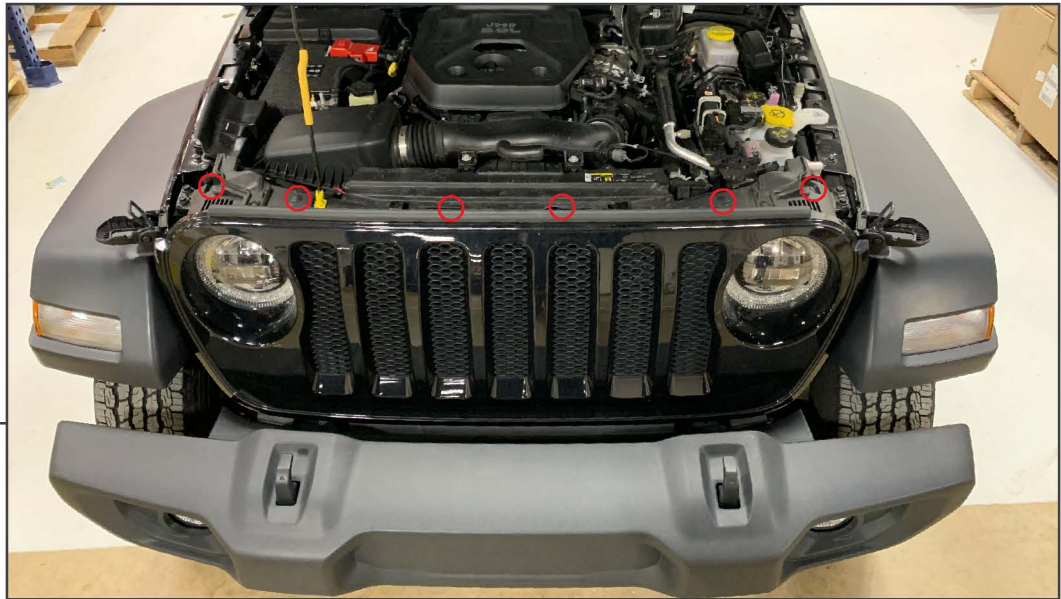

STEP 1

Raise and support the hood to access the (6) push clips securing the grille to the vehicle. Remove the clips and then firmly pull the grille away from the vehicle.



STEP 2

Using a 10mm socket, remove the (3) bolts securing the headlight to the vehicle.



STEP 3

Pull the headlight away from the vehicle to access the wiring connection. Depress the connectors locking tab and pull the connector away from the light.



STEP 4

Remove the (2) 8mm bolts and (1) plastic push pin to gain access to the fender mounted running light.


STEP 5



Turn the fender light socket counter clock-wise and remove it from the housing. Splice (1) wire lead into the parking lamp circuit using the included scotchlok connector. Route the wire lead to the headlight bucket.

- | | | |
|----------------------|---|--------------|
| LH Side Parking Lamp | - | White/Brown |
| RH Side Parking Lamp | - | White/Orange |


STEP 6

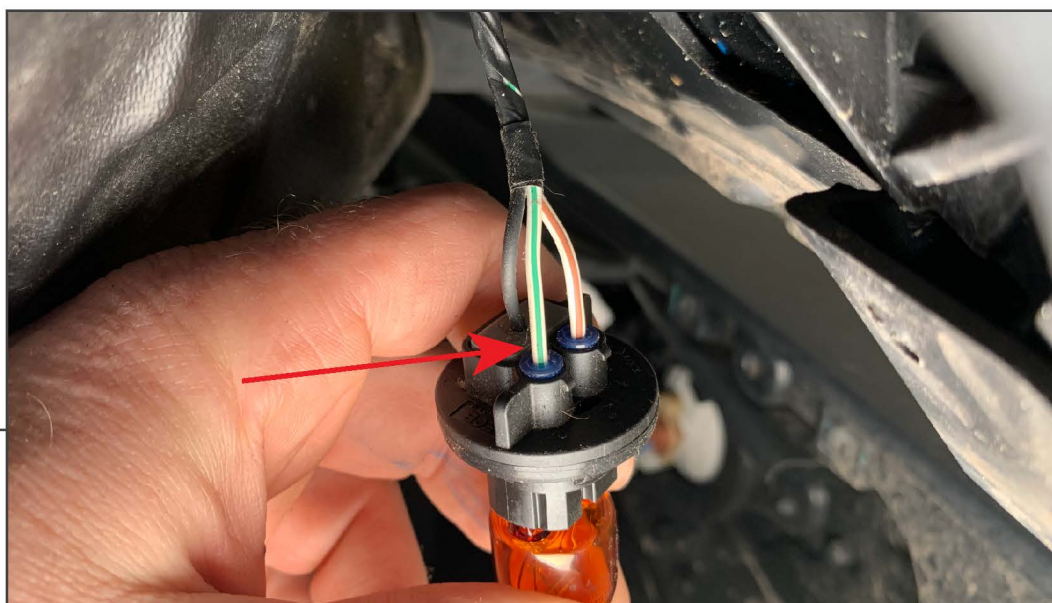

Splice (1) wire lead into the turn signal lamp circuit using the included scotchlok connector. Route the wire lead to the headlight bucket.

- | | | |
|--------------------------|---|-------------|
| LH Side Turn Signal Lamp | - | White/Green |
| RH Side Turn Signal Lamp | - | White/Tan |


STEP 7

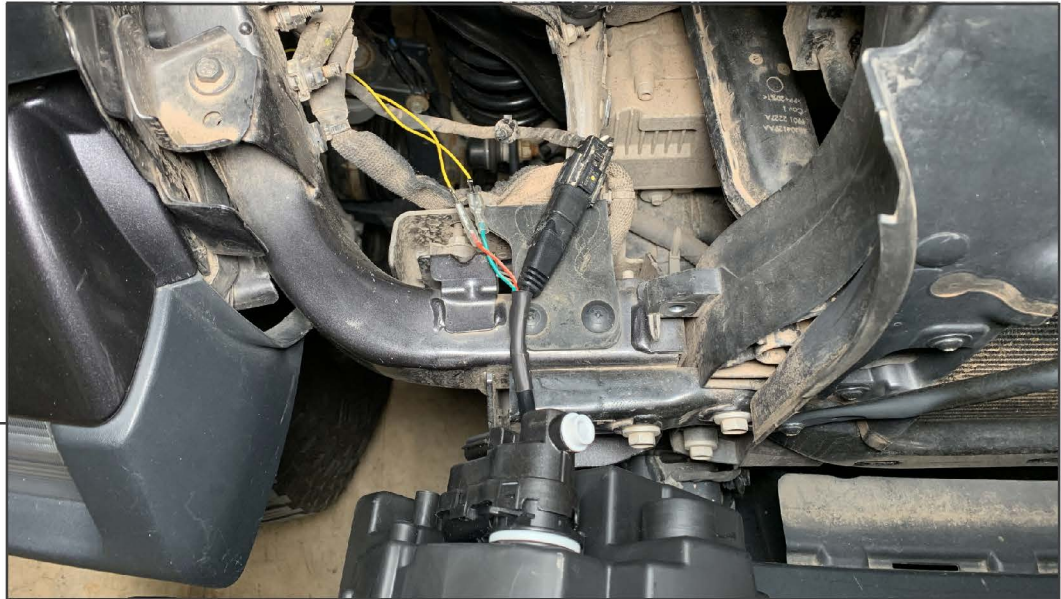


Plug the headlight harness into the new headlight.

Connect the (2) wire leads to the headlight wiring. Ensure to test functionality before fully connecting the wire leads terminals together.

STEP 8

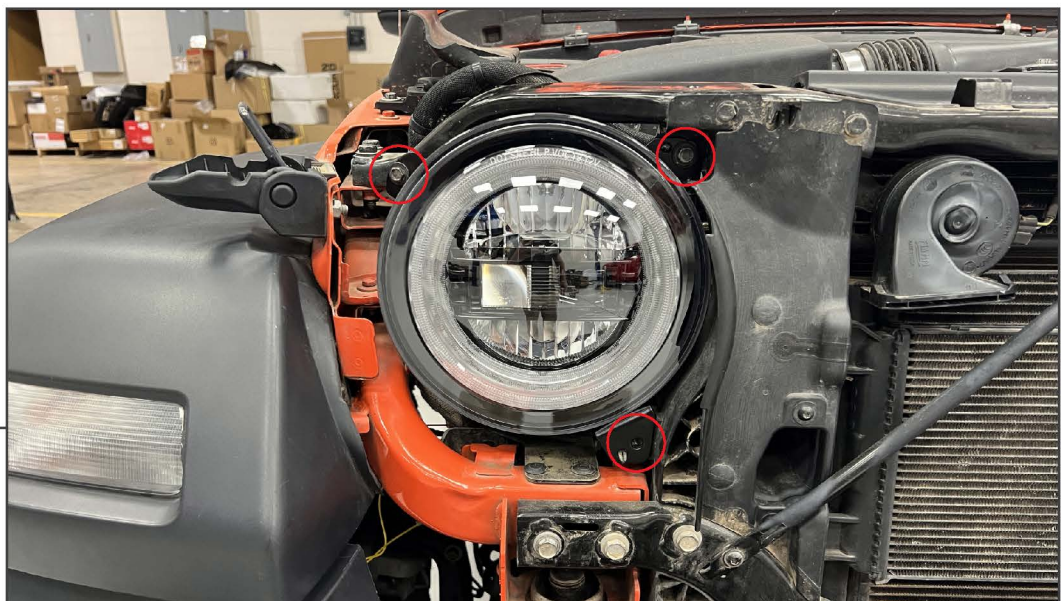

Install the LED headlight onto the vehicle using original (3) 10mm bolts. Tighten evenly until secure.

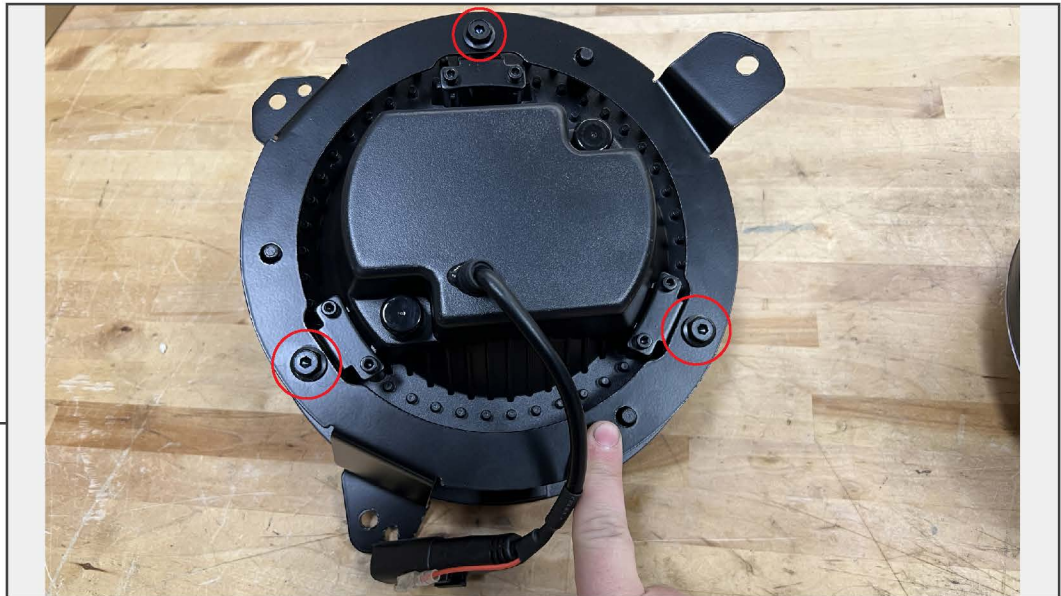

**STEP 9
(HEADLIGHT
ADJUSTMENT)**

Headlight Adjustment: Tighten/loosen the (3) bolts to adjust the headlight vertically and horizontally.



STEP 10

Repeat steps 1-9 to the remaining vehicle headlight. Re-install the vehicle grille using the original hardware.

Installation is now complete.