



LIMB RISER KIT

(2018-2024+ WRANGLER JL)

(2020-2024+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (2) Limb Riser Cables
- (2) Adjusters
- (2) Lower Mounting Brackets
- (2) Upper Mounting Brackets
- (2) M8x1.25 x 20mm Tapered Bolts
- (2) M8 Flat Washers
- (2) M8 Lock Nuts
- (6) Rivets


TOOLS REQUIRED

- 10mm Socket/Wrench
- 13mm Socket/Wrench
- Ratchet
- 5mm Allen Key/Socket
- Drill & Drill Bits
- Rivet Gun



STEP 1

Open the vehicle hood, remove (2) 10mm nuts. Then, remove the upper catch from the hood.

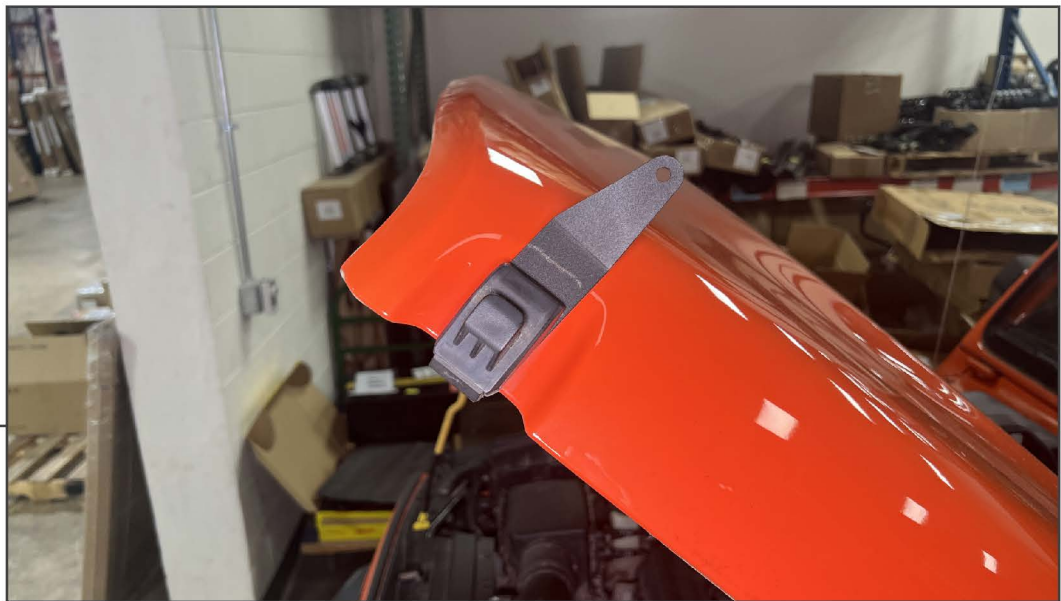

STEP 2

Fit the lower limb riser bracket to the hood latch, and secure the bracket & hood latch assembly to the hood reusing the original (2) 10mm nuts.



STEP 3

Test fit the upper mounting brackets to the vehicle A-Pillar between the windshield and the door. Using a marker, mark the desired mounting hole location on the vehicle. Then, using an appropriate drill bit, drill the holes and install the bracket to the vehicle using the included (3) rivets.



STEP 4

Secure the top of the limb riser cable to the upper mounting bracket using (1) M8 bolt, (1) M8 flat washer, and (1) M8 lock nut.



STEP 5

Fit the adjuster assembly to the previously mounted cable and the hood mounting bracket using the attached pins & clips. Spin the center of the adjuster to add/remove tension from the limb riser assembly. Once tightened to the desired tension, turn the jam nuts to lock the tension position.



STEP 6

Repeat steps 1-5 for the opposite side of the vehicle.

Installation is now complete.