



WINDSHIELD HOLD DOWN BRACKET SET

(2018-2024+ WRANGLER JL)
(2020-2024+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS


CONTENTS

(2) Windshield Hold Down Brackets
(2) Rubber Seals
(4) Lock Nuts
(4) Flat Washers

TOOLS REQUIRED

6mm, 9mm Sockets
Ratchet
Panel Removal Tool

STEP 1

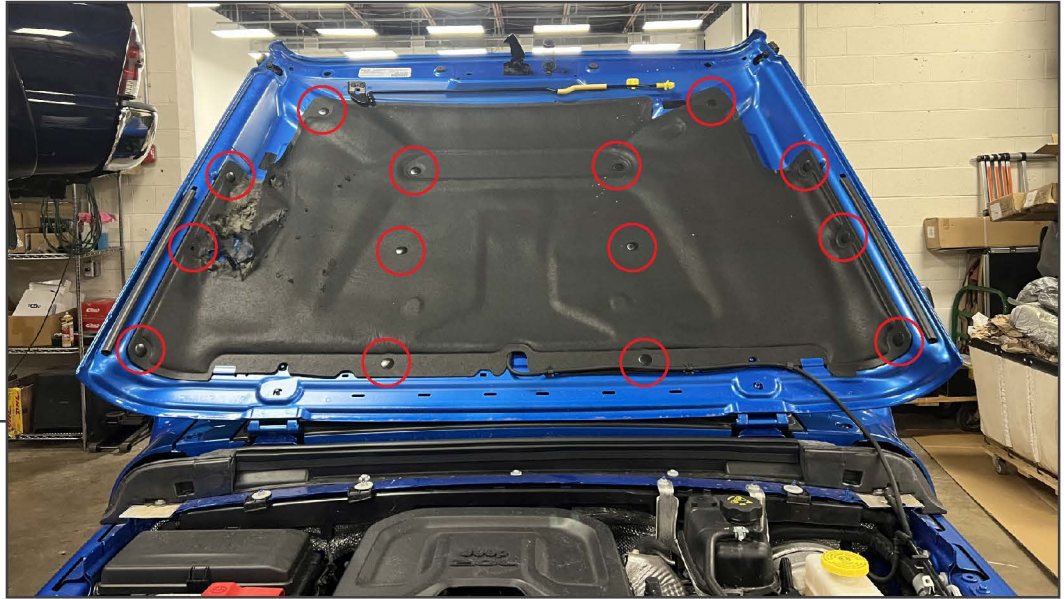

Remove (14) plastic clips securing the hood insulation to the hood. Then, remove the hood insulation from the vehicle.

STEP 2



With the hood insulation removed, locate the windshield hold down brackets near the windshield washer nozzles. Remove (2) 9mm nuts from each bracket. With the nuts removed, use a plastic pry tool to remove the brackets from the hood.



STEP 3

Press the new windshield hold down bracket into the vehicle hood. Secure each bracket into place using (2) flat washers and (2) lock nuts per bracket, tighten evenly until secure.

Re-install the vehicle hood insulation reusing the original plastic clips.

Installation is now complete.