

Installation instructions for Doors Off Designs mirror mounts on 18-24 Jeep JL/JLU Wrangler

The mounts for the mirrors will be installed on the lower bolt of the grab handle on the driver and passenger side to have the mirrors at the normal height. (they can be installed on the top bolt if you want, but you would need to put the passenger side mount on the driver side and vice versa.)



The instructions will be demonstrated on the passenger side of the vehicle and repeated for the driver's side.

Locate grab handle on passenger side of vehicle and use small flathead screwdriver to pop open the cover on top and bottom. Remove the lower cover completely and save. If you ever decide to remove mirror mounts, you can reinstall them later.




Using a 10mm socket and extension, loosen up the top bolt and remove the bottom bolt. Save the bottom bolt with the bottom cover. The mirror mounts come with longer bolts to be used in the bottom hole.



Take passenger side mount and push it into the hole as shown in the picture. (it will be a snug fit, designed like this on purpose to keep any vibration down) Take new supplied bolt and thread the bolt into the mount. Once you have the bolt into the threads on the jeep tighten up the top and the bottom bolts and pop top cover back into place. (If you have trouble getting the bottom bolt started, take the top bolt completely out so the handle can move around a bit more.)



Once you have the mount secure to the Jeep you may slide the mirror into the mount and tighten the thumb screw at the desired spot. The mirrors will not stick out far past the windshield frame. The convex shape of the mirror helps you see what you are beside without sticking way out like a traditional mirror would be. Make sure you rotate the mirror 180 degrees from the way they are packaged. (See bottom photo on left) Note: The mirrors are the same, the mounts are different.

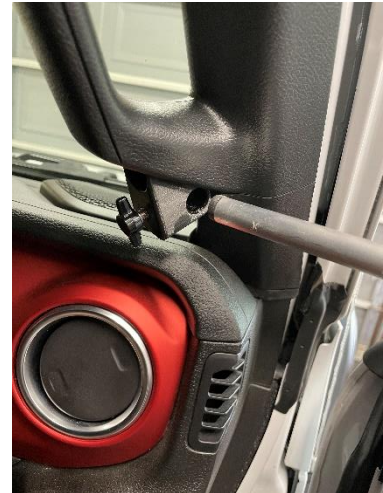

When mirrors are not in use hand tighten the thumb screws so they do not get lost.

